

BBC MICRO·MASTER·ELECTRON·ATOM

£1.30

ACORN USER

DECEMBER 1986

BEST-SELLING AND BIGGEST BBC/ACORN MAGAZINE

BEST GAMES:
Pick of the year
in the arcades



COMPACT EXTRA:
Make the Desktop
work for you

NETWORK TIPS:
Practical help
and programs

VIEW BASICS:
Get to grips with
wordprocessing

NIGHTMARE CASTLE

Play this game at
your peril!





The Best of British

DIGIMOUSE™

FOR THE ACORN BBC B, B+ AND MASTER SERIES AND
JUST RELEASED FOR THE MASTER COMPACT

"Extremely well made"
YOUR COMPUTER
"Superbly designed. Ultimate in
precision and quality"
VIEWFAX TUBELINK

■ **POSITIVE MOVEMENT
CONTROL**

■ **3 INPUT KEYS WITH
UNIQUE LINEAR LOCK**

■ **NON-SLIP
POLYURETHANE BALL**

■ **ENGINEERED FOR
LASTING PRECISION**

Thousands of serious computer users have now experienced the positive and stable movement control which DIGIMOUSE gives. It's designed to fit comfortably in your hand to make it so much easier to use on CAD or graphics software.


The mouse features a unique **LINEAR LOCK** switch which means you can draw perfectly straight lines freehand in either X or Y directions using the outer two mouse keys. A very useful extra!

The non-slip ball and optical encoder system is precision engineered for the kind of accuracy and reliability you would expect, and the mouse is supplied with a generous (1.5m) length of cable which trails behind the mouse so it won't get in your way.

As DIGIMOUSE is compatible with many graphic art and word processing packages (including AMX and Wigmore) we offer the mouse on its own for the BBC B, B+ or Master, with machine code routines, — an excellent and economical alternative!

DIGIMOUSE with user routines for BBC B, B+ or Master

£37.90

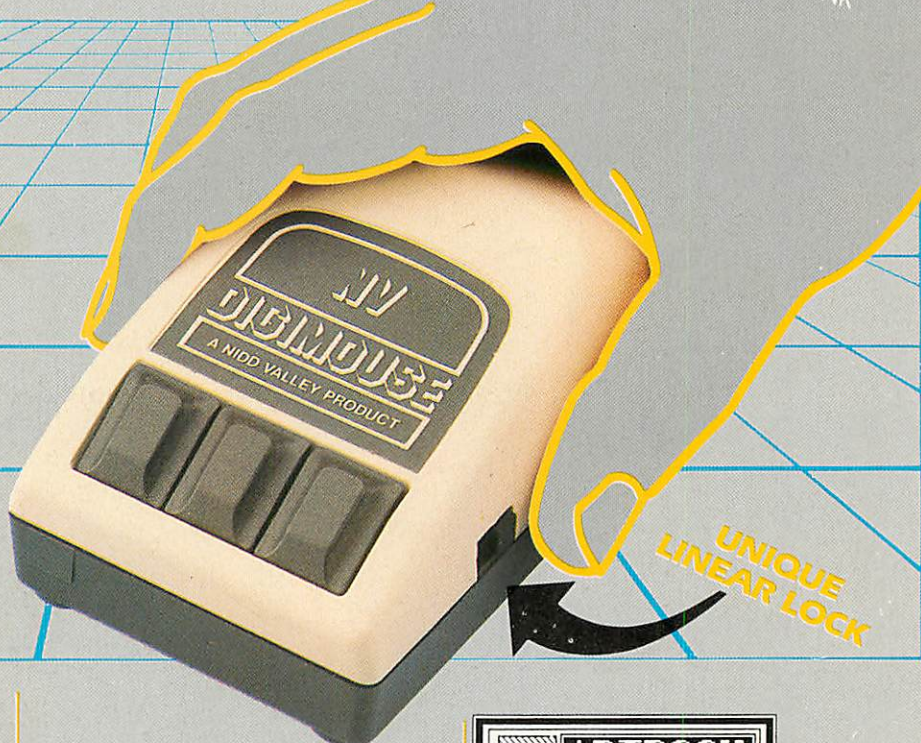

**UNIQUE
LINEAR LOCK**

Grafik A USER-FRIENDLY INTRODUCTION TO CAD

A practical and inexpensive graphics software package, input is by Digimouse and Function Keys for the most efficient and accurate production of complex designs.

Some of the many features are:

- Rubber banding on all drawing options
- Colour and fill
- Adjustable brush size
- Text insertion
- Alignment grid
- Mode selection
- Printer dump
- Large drawing area
- Save and load to disk.

GRAFIK is supplied with user routines on disk plus a comprehensive operating guide and demonstration.

DIGIMOUSE with GRAFIK for BBC B, B+ or Master

£39.90



**NEW!
FOR
THE
MASTER &
COMPACT**

Written by the programmers of "Fleet Street Editor", a superb high resolution graphics package from Clares, featuring:

- Boxes • Circles • Rubber band
- Pens • Fills • Copy • Enlarge
- Reduce • Rotate • Inverse • Zoom
- Airbrush • Proportional fonts
- Reserve screen.

To do justice to ARTROOM's superior graphics, a specially written PRINTER DUMP allows you to print out graphics and text in mixed fonts, in any position.

Chosen by OLIVETTI, Italy as their standard mouse package.

DIGIMOUSE with ARTROOM for BBC Master or Compact

£59.90

A QUALITY BRITISH PRODUCT 12 MONTHS GUARANTEE

Available from good computer shops or by mail order direct from Nidd Valley. For immediate Access orders ring (0937) 844661. Or send cheque/PO stating for which model, to the Freepost address below. All prices include VAT and P&P. Please allow 14 days for delivery.

NIDD VALLEY MICRO PRODUCTS LTD
Dept. AU1286 Freepost, Wetherby, West Yorkshire, LS23 7YP

MICRO MEDIA Computer Supplies

0707 52698 or 0707 50913

Dept. AU Rydal Mount, Baker Street,
Potters Bar, Herts EN6 2BP

Printer Ribbons

Mixed types for quantity breaks

	2+	5+	12+
Acom AP 80	2.70	2.30	2.10
AP 100	2.70	2.30	2.10
Ink Jet Cartridge	7.50 per pack of four		
Brother M1009	3.50	3.00	2.80
Red Brown Blue Green	4.95	4.65	4.25
HR 15 MS	3.30	2.90	2.60
HR 15 Fabric	3.40	3.00	2.70
Canon PW1156/1080	3.20	2.70	2.50
Red Brown Blue Green	4.70	4.20	3.90
Centronics GLP	3.50	3.00	2.80
Red Brown Blue Green	4.95	4.65	4.25
Daisystep 2000 M/S	2.90	2.40	2.20
Fabric	4.10	3.80	3.50
Epson FX/MX/RX 80	2.80	2.40	2.20
Red Brown Blue Green	4.00	3.30	3.10
LX 80	2.80	2.40	2.20
Red Brown Blue Green	4.00	3.30	3.10
Juki 5510	2.80	2.40	2.20
Red Brown Blue Green	4.00	3.30	3.10
6100 MS	2.30	1.90	1.70
6100 SS	1.40	1.10	1.00
Corr Red Brown Blue	2.50	2.10	1.90
2200 Fabric	3.60	3.30	3.10
2200 SS	3.00	2.60	2.40
2200 Corr	3.90	3.50	3.30
Kaga KP 810/910	3.20	2.70	2.50
Red Brown Blue Green	4.70	4.20	3.90
M/Tally MT 80 M/S	3.80	3.00	2.80
NEC PC 8023	3.60	3.00	2.80
OKi 80/82	1.50	1.20	1.10
Red Brown Blue Green	2.40	2.00	1.80
Panasonic KXP 110	3.90	3.40	2.90
Quendata 2000 MS	2.90	2.40	2.20
Fabric	4.10	3.80	3.50
Seikosha GP80	2.70	2.30	2.10
GP100/250	2.70	2.30	2.10
GP500	3.70	3.10	2.90
Red Brown Blue Green	4.90	4.60	4.20
Shinwa CP80 M/S	3.80	3.00	2.80
Smith Corona			
D100/200	4.90	4.50	4.00
EL1000/2000 M/S	8.30	7.70	7.00
Fabric	3.70	3.40	3.30
Corr	4.80	4.50	4.30
Star Gemini 10x15x	1.50	1.20	1.10
Red Brown Blue Green	2.40	2.00	1.80
NL 10	5.50	4.80	4.50
Walters WM80 M/S	3.80	3.00	2.80
2000	3.70	3.30	2.90

If the ribbon you require is not listed
ring 0707 52698 and let us quote

Swivel Bases for Monitors



Pan tilt revolves around 360°
12.5° tilt up and down
adjustable by front mechanism.


12" Monitors **£12.00**
14" Monitors **£15.00**

Adjustable Copy Holders



A4 Adjustable desk
clamping. Magnifying
cursor line paper
height adjustable clip,
paper thickness
adjustment.

£19.80

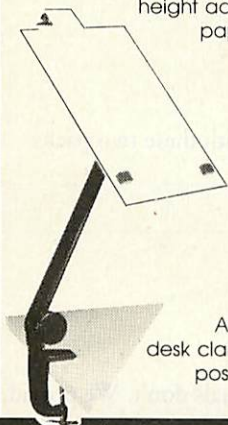

A4 Adjustable
desk clamping. Plate
positioned 360°

£13.90

Micro Media Brand Universal 5 1/4" Discs

Reversible with 2 notches and index
holes. Lifetime guarantee, hub rings,
envelopes, labels. Suitable for 40 or
80 track. Packed in plastic library
case.

10+ 30+ 50+
9.40 8.90 8.50

Unbranded 5 1/4" Discs

Certified lifetime warranty
hub rings, envelopes, labels
Prices per 10 Discs

	10+	30+	50+
SS/DD 40	6.50	6.00	5.50
DS/DD 40	7.50	7.00	6.50
DS/DD 80	8.50	8.00	7.50

Unbranded 3 1/2" Discs

Lifetime Guarantee/label sets
SS/DD 17.00 16.00 15.00
DS/DD 19.00 18.00 17.00

3M 5 1/4" Lifetime Guarantee

SS/DD 40	10.80	10.40	10.00
DS/DD 40	12.80	12.40	12.00
DS/DD 80	17.70	17.00	16.50

3M 3 1/2" Lifetime Guarantee

SS/DD	20.50	20.00	19.00
DS/DD	27.50	27.00	26.00

Verbatim Datalife 5 1/4"

SS/DD 40	11.70	11.40	11.10
DS/DD 40	14.70	14.40	14.10
DS/DD 80	19.70	19.40	19.10

Computer Labels

Continuous fanfold, sprocket fed
Price per 1000

70 x 36	4.20	3.80
89 x 36	4.30	3.90
89 x 49	5.90	5.30
102 x 36	4.50	4.20

Please state no. of labels across the
sheet (1, 2 or 3).

9 1/2" Backing Sheet for Fixed Tractor

	1,000	2,000
70 x 36 3 across	4.20	3.80
89 x 36 2 across	6.60	6.30
102 x 36 2 across	6.70	6.40

Computer paper

Size	Weight	1000's	Price per box
	gsm	per box	1 box 2 bxs+
11x9 1/2	60	2	12.50 11.80
	80	2	15.50 14.20

EXACT A4			
11 3/8 x 9 1/4	70	2	20.90 18.50
	90	1	13.20 11.00

A4 Fixed tractor paper available

Head Cleaners

Discs with 15ml cleaning solution	
5 1/4" Head Cleaner	4.00
3 1/2" Head Cleaner	5.00

Printer Leads

Centronics lead to connect BBC to Epson Kaga Canon etc.	
1 MTR	6.30
2 MTR	8.50

Printout Binders


Adjustable hardback ring binder for 11x9 1/2 to 12x9 1/2 cont paper 40mm paper capacity	
BLUE RED or BLACK	£4.90 each
set of 5 indexes	£2.30

Disc Mailers

Price each	50+	100+
Rigid Cardboard holds	40p	28p
up to 3 discs		

Printer Stands

5mm clear perspex
405 x 325 x 100mm

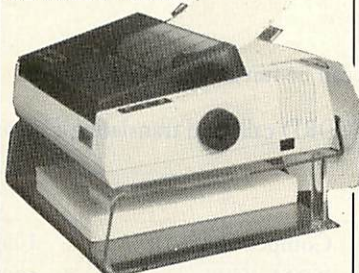

80 column printers **£17.90**
132 column printers **£24.90**




MM100
Lift off lid



MD100



MM50
Lift off lid

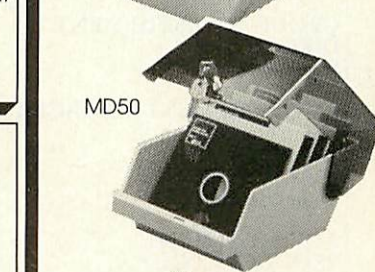

MD50



MM40

Disc Boxes

	1	3+
MM 100 5 1/4 x 100	11.70	10.00
MD 100 5 1/4 x 100	11.70	10.00
MM 50 5 1/4 x 50	8.70	7.90
MD 50 5 1/4 x 50	8.70	7.90
MM 40 3 1/2 x 40	8.50	7.40
Rexel Mini Disc Box	5.00	
Plastic Library Case	1.50	

All MM boxes anti-static with lock

● Educational and HMG orders accepted. ● Trade enquiries. ● Personal callers welcome. ● Open Sat 10am - 4pm

Orders despatched. 24 hrs.
Please allow 5 days for
delivery. For next day delivery
please ring for details.
Postage covers UK only.



ALL PRICES INCLUSIVE OF
POSTAGE & PACKING

Please add VAT at 15%



24-Hour Credit Card Orders

0707 52698

MICROMEDIA-MICROMEDIA-MICROMEDIA-MICROMEDIA-

ACORNUSER

ISSUE No 53 DECEMBER 1986

EDITOR
Tony Quinn

TECHNICAL EDITOR
Bruce Smith

TECHNICAL ASSISTANT
David Acton

SUB-EDITORS
Shona McIsaac
Paul Horrell

EDITORIAL SECRETARY
Colette Curley

ART DIRECTOR
Mike Lackersteen

ART EDITOR
Liz Thompson

ASSISTANT ART EDITOR
Paul Holmes

EDITORIAL MANAGER
Ellen Brush

EDITORIAL ASSISTANT
Teri North

GROUP ADVERTISEMENT
DIRECTOR
Stefanie Blower

ADVERTISEMENT MANAGER
Simon Goode

SALES EXECUTIVE
Thomas Rashid

ADVERTISEMENT
PRODUCTION
Jonathan Marsh

MERCHANDISING
MANAGER
Sarah Bullard

PUBLISHING DIRECTOR
Michael Potter

EDITORIAL DIRECTOR
Christopher Ward

NEW USERS

HINTS AND TIPS:	49
Martin Phillips on print formatting on-screen and fraction printing	
FIRST BYTE:	55
Tessie Revivis on addition and subtraction in assembler	

REVIEWS

GAMES:	133
<i>Price of Magic</i> by Level 9 and Superior's Galaforce are examined	
SOFTWARE:	134
<i>Movie Maker</i> produces animated films on screen	
GAMES	137
The best of the last year's BBC games	
GAMES:	140
Another set of favourite games, this time for the Electron	
HARDWARE:	145
Music 5000 on the BBC micro gives great composition control	
HARDWARE:	150
At last — home control of appliances via the mains using Red Boxes	
SOFTWARE:	153
ACP's ROM-based 1770 disc filing system	
SOFTWARE:	155
Two programs to log onto French videotex	
SOFTWARE:	161
Learn to use <i>Wordwise</i> then use it quicker with these two packs	

BUSINESS

NEWS:	169
All the latest for users of Acorns in business	
PRINTERS:	173
Continuing our series of printer reviews	
WORDPROCESSING:	175
<i>View</i> comes with the Compact, but the manuals don't. We provide some help	

EDUCATION

NEWS:	193
The latest in the field	
BUYERS GUIDE:	197
The best hardware and software can be fun as well as educational	
NETWORKS:	205
The Network Page looks at OSWORD calls and translating <i>Edword</i>	

REGULARS

News	7	Competition	105	Games charts	131
Blunderbox	18	ROM offer	108	Acorn Forum	209
Letters	43	Special discs offer	110	User groups	227
Reader service	46	Disc and cassettes offer	112	Free ads	229
Subscription offer	48	Yellow pages	113	Small ads	231
Bar code reader offer	92	Order forms	129	Acorn Abuser's diary	232

Subscriptions: Contact Christine Allen, Redwood Publishing Ltd, Lambourn Woodlands, Newbury, Berks. Tel: (0672) 40888. UK £17.50; Europe £25; Middle East £30; Americas, Africa £35; rest of the world £40; (prices include p&p for 12 issues). Published by Redwood Publishing Ltd, 141-143 Drury Lane, London WC2B 5TF. Tel: 01-836 2441. Printed by Watmoughs Ltd, Bradford. Typesetting by Tabloid Fotoset, London. Colour reproduction by Screencharm London. Print production by Aquarius Print and Design, London. Distributed by Comag, Tavistock Road, West Drayton, Middlesex.




FEATURES

BLOCKS FOR BUILDING

81


Joe Telford jots down some simple functions and procedures which can be written into a limitless variety of programs



A NIGHTMARE BEGINS

88


Mark de Weger has developed a fiendish platform game which can be modelled to your specifications — *Castle of Nightmares*



THROUGH THE WINDOWS

95

David Lawrence shows how to design the increasingly popular windows into your programs



COMPACT COMPANION

99

Continuing David Atherton's series on the Compact with programs to personalise the welcome disc for your own uses



A CLEARER VIEW

175

The number of *View* users will rise further now that it comes with the Compact. Clive Williamson gives a guide




COVER



Cover illustration
by Edward Briant

NEXT MONTH

Kiddie Art introduces children to
computer graphics
Upgrade the Compact for
communication
The Scorpion board
Graphics for business

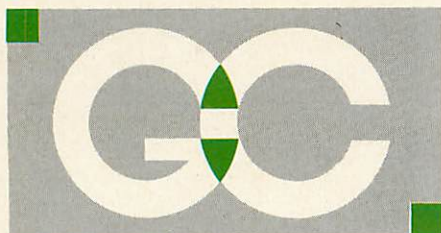

GRIFFEN COMPUTERS
CASTLE WALK, LOWER STREET
STANSTED, ESSEX CM24 8LP
TELEPHONE: 0279 812295

INTERSHEET – The first of the ROM-LINK integrated rom packages from Computer Concepts. Menu driven, 40/80/105 column display, very fast, can be used with View or Wordwise, up to 16 spreadsheet in memory at one time. Supplied on two roms with reference manual, function key strip and quick reference card. **45.95 (a)**

INTERCHART – The second ROM-LINK package and designed for Intersheet giving Bar, Pie and Line graphs. **29.95 (a)**

INTERWORD – The new wordprocessor from Computer Concepts of the WYSIWYG type. Allows 40, 80 and 106 column mode. **50.95 (a)**

INTERBASE – The new rom-link database from Computer Concepts. (available soon). **P.O.A.**

ISO-PASCAL STAND ALONE GENERATOR – Allows ISO PASCAL programs to be used on any BBC system. Disc based. Comes complete with manual. **31.95 (a)**

WORDWISE – The standard BBC word processor still very popular allowing all normal features for low cost. **30.95 (a)**

WORDWISE-PLUS – The new 16k version of Wordwise giving added commands for better use. Using its own language mail merging, indexing, continuous processing and multi column text can be utilised. **44.95 (b)**

TTS SPEECH ROM – This rom provides the most powerful and comprehensive speech system available for the BBC Micro. You can make your computer speak by simply typing in what you want to say. Requires Acorn Speech Processor. (Available soon) **36.95 (a)**

Acorn Speech Processor – bought with above – **10.00** Otherwise **17.25 (a)**

MICRO PROLOG – A logic programming language allowing the use of artificial intelligence techniques. **69.95 (b)**

PRINTMASTER – This rom allows Epson or Star printers to be fully utilised easily. Includes a versatile screen dum, enlarged text, various text manipulation commands. **27.50 (a)**

DISC DOCTOR – Still a very popular disc utility rom giving many extra commands to any DFS. **27.50 (a)**

OXFORD PASCAL – A full implementation of the Pascal language including fully recursive procedures, type definitions and repeat until loops. Compiles down to compact P-code. **43.95 (a)**

ADVANCED DISC TOOLKIT – Probably the most versatile & compatible toolkit rom available. It works with the Electron, BBC B, BBC B+, Master, 6502, Z80, DFS, DNFS, 1770 DFS, ADFS. It adds more than 30 extra commands to the BBC. **33.00 (a)**

ADVANCED DISC INVESTIGATOR – a very powerful disc utility for standard and non-standard discs. Will back up protected discs and edits any type of non-standard disc. **27.50 (a)**

BEEB TEXT PLUS – A unique BBC Micro text-display enhancer. Ideal for eye-catching carousel displays and videotitling. **19.95 (a)**

BROM PLUS – Enhanced version of the original Brom allowing a whole host of additional commands. Still with the best full-screen editor available. **Rom 31.95 (a)**
Disc 27.95 (a)

BETABASE – A very useful database program allowing up to 65000 record to be held. Many features include versatile printing, powerful sorting routines, outputs can be compatible with Wordwise or View. **21.95 (a)**

BETABASE UTILITIES – Adds many more features to Betabase including full disc sort, mail merging and many more. **11.00 (a)**

REPLICA III – Now enhanced to transfer even more of your tapes to disc. Now uses a data disc so you need only to buy one copy. Even works with the BBC B+. **13.95 (a)**

BETA-ACCOUNTS – The first of this integrated suite of programs allows Invoices and Delivery notes to be issue. 80 Column editing, sales ledger sheet automatically generated, multiple VAT rates. Can be used with Betabase. **21.95 (a)**

PROFILE – A procedure library allowing up to 100 procedures on a disc, easy merging of procedures with basic programs. **11.00 (a)**

FONT EDITOR – Add a further ten fonts to Fontwise Plus as well as allowing fonts & designs to be edited or created. **17.35 (a)**

FONTWISE PLUS – Enhanced version of the original Fontwise allowing more embedded commands. Now gives 12 fonts. **17.95 (a)**

RAMROD – A powerful disc, tube, rom and general utility rom working with the B, B+, B+128, Master 128, Turbo & 6502 processors. **Rom 37.95 (a)**
Disc 33.95 (a)

SPELLCHECK III – A rom based spelling checker for both View and Wordwise. A dictionary of 76000 words is supplied which can be expanded to over 17000 on a 100k disc. Much faster than the original versions. **28.60 (b)**

TOOLKIT PLUS An updated version of the popular Toolkit rom including a syntax checker and a full screen editor comparable to any other available. **36.65 (a)**

HELP II – Now extended to 16k, contains ALL basic keywords, ALL VDU codes, ALL FX codes. **28.95 (a)**

SLEUTH – A comprehensive basic debugging rom. It allows single stepping of basic programs, dual screen facility, breakpoints etc. **26.25 (a)**

EXMON II – A very advanced machine code monitor which now includes dual screen facility and a full screen memory editor. Also includes single stepping and breakpoints. **26.25 (a)**

MASTERFILE II – A general purpose file management package allowing large amounts of its information to be stored and processed. **17.50 (a)**

FLOPPYWISE PLUS – A very useful utility rom with a variety of new commands including Clone, Protect, Rom load and many more. **28.95 (a)**

VIEW – Version 2.1 of Acorns wordprocessor. Allows 80 column editing, printing direct from memory etc. **44.45 (a)**

VIEW PRINTER DRIVER GENERATOR – Allows you to tailor a printer driver to your own printer. Comes with drivers for FX80, Juki 6100, Olivetti JP101 and others. **Disc — 11.00 (a)**
Cassette — 9.50 (a)

VIEW 3.0 – A version of View suitable for the BBC+. Comes with a cassette version of the Printer Driver Generator. **68.95 (a)**

HI-VIEW – A disc based version of this popular word processor for the 6502 second processor giving 47k of user memory. **44.95 (a)**

VIEWSHEET – Acorns spreadsheet rom giving 255 rows by 255 columns, multiple windows, works in any mode, wide use of function keys, fully compatible with View. **44.45 (a)**

VIEWSTORE – Acorns new database rom. Works in any screen mode, many powerful sorting facilities, can be spreadsheet or user defined card layout. max record size is 60k. Output can be sent to View and Viewsheets. Comes with comprehensive manual, utilities disc etc. **44.45 (a)**

VIEWSPELL – An automatic spelling checker using a dictionary of over 75,000 words. User dictionaries can also be created. **34.95 (a)**

VIEWPLOT – This rom will work with Viewsheets and Viewstore to draw bar graphs, line graphs and pie charts. (Available soon). **25.95 (a)**

GRAPHICS ROM – Acorns new 16k graphics rom giving many new commands for extensive graphics. Circles, ellipses, arcs, rectangles, parallelograms, segments and sectors etc are all available. Comes with manual and utility cassette. State B of B+ version. **25.95 (a)**

BASIC EDITOR – Acorns new editor rom allowing all the normal wordprocessor facilities to be used on basic programs. Features include block copy, block move and use of labels. **27.95 (a)**

TERMULATOR – A terminal emulation rom. Emulations provided are VT100, VT52, 4010, teletype, hardcopy and a special BBC terminal. Comes with user guide and a set of function key strips. **29.95 (a)**

ISO-PASCAL – A full implementation of the ISO standard supplied on two roms with two comprehensive guides. 6502 disc version also supplied. **54.95 (c)**

ISO-PASCAL STAND ALONG GENERATOR – Allows ISO PASCAL programs to be used on any BBC system. Disc based. Comes complete with manual. **31.95 (a)**

LOGO – A full implementation of the Logo language supplied on two roms. Comes with manuals, user guide, examples disc and reference card. **54.95 (c)**

COMAL – A full implementation of the International Standard for Comal. Comes with comprehensive manual. **44.95 (c)**

MICRO PROLOG – A logic programming language allowing the use of artificial intelligence techniques. **69.95 (b)**

AA189a

MASTERS & COMPACTS – NOW AVAILABLE

MASTER 128

Master 128	454.25 (s)
Turbo Upgrade	119.00 (s)
Master 512 Upgrade	385.00 (c)
Master Econet Module	47.00 (c)
Eprom Cartridges	From 8.95 (b)

MASTER COMPACT

TV System	455.00 (s)
Mono System	535.00 (s)
Colour System	685.00 (s)
Master Ref. Manual Pt I	14.95 (a)
Master Ref. Manual Pt II	14.95 (a)

KAGA TAXAN KP810

A top quality NLQ printer giving 150 c.p.s. draft and 27 c.p.s. NLQ. Fully FX80 compatible, friction and tractor feed as standard. Comes complete with cable and paper 249.00 (s)
Free with every KP810 the Font design package allowing 10 pre-defined fonts or any user defined fonts to be used.

EPSON LX80

The new low-cost printer from Epson giving 100 c.p.s. draft and 22 c.p.s. NLQ. Fully FX80 compatible. Friction feed standard, tractor unit available. Comes complete with cable & paper.

	225.00 (s)
LX80 Tractor Unit	21.00 (c)
LX80 Cut Sheet Feeder	56.95 (b)

JUKI 5510

A very versatile and fast printer giving 180 cps draft and 30 cps in NLQ mode. Friction & tractor feed as standard. Fully FX80 compatible. Comes with cable & paper.

	265.00 (s)
Juki 5510 Cut sheet feeder	235.00 (s)

JUKI 6100 DAISYWHEEL

A low cost daisywheel giving 20 cps 2k buffer 10, 12, 15 and proportional spacing. Cut sheet feeder and tractor unit available.

	275.00 (s)
Juki 6100 cut sheet feeder	215.00 (s)
Juki 6100 tractor unit	149.00 (s)

VIEW PRINTER DRIVERS

We have printer drivers available for all the above printers 7.95(a)

FONT DESIGN

A disc based font program allowing any one of 10 pre-defined fonts or any pre-defined font to be downloaded to a Kaga KP810 or Canon PW1080A printer. The 8K ram chip (6264LP-15) must be fitted to the printer. BBC B, B+ and Master compatible. 9.95(a)

AMX MOUSE

AMX Mouse with Super Art	79.00 (c)
AMX Super Art	47.95 (b)
AMX Pagemaker	47.95 (b)
AMX Desk	23.00 (b)
AMX Database	23.00 (b)

ROM/RAM BOARDS

ATPL Rom board	37.95 (a)
Peartree MR 2000 Rom board	13.95 (a)
Peartree MR 3000 Rom board	17.25 (a)
Peartree 4200 Rom board	29.95 (a)

MASTER ACCESSORIES

View 3 guide	10.00 (a)
Viewsheets guide	10.00 (a)
Viewstore guide	10.00 (a)
Iso-pascal (C)	65.00 (a)
Logo (C)	65.00 (a)
Lisp (C)	56.00 (a)
(C)-Master cartridge	

COMPLETE SYSTEMS

We can tailor-make a complete word-processing system to your particular needs. Phone for more information.

For example.
BBC Master 128
View 3.0 & manual
Hi-Res Green Screen monitor
Dual 40/80tr Mitsubishi drives
Juki 5510 NLQ printer
All cables, a box of discs & paper.
Only 1046 inc VAT

PLOTTERS

The A4M and A3M plotters plug directly into the Beeb and run a wide variety of software form Linear Graphics and third party companies, eg. Beebugsoft Hershey characters. Ideal for graphics work, PCB layouts, mapping and scanning. There are many add-ons available including optical scanners. Ideal for education, business or industrial applications.

A4M	399.00 (s)
A3M	549.00 (s)
Linsign	22.50 (a)
Linchart	22.50 (a)
Lincad	56.50 (a)
Hershey Characters	21.00 (a)

MODEMS

Nightingale/Commstar	
1200/75 75/1200 300/300 baud rates, BT	
Approved. Comes with BBC cable.	133.00 (c)
Pace Nightingale	121.00 (c)
Commstar Software	36.00 (a)
Auto Dial Board	52.00 (c)
Autodial Utils Disc	11.00 (a)

SPECIAL OFFERS

27256 32K Eprom	1-9	4.75 (a)
	10 +	4.00 (b)
27128 16K Eprom	1-9	2.95 (a)
	10 +	2.60 (b)
2764 8K Eprom	1-9	2.50 (a)
	10 +	2.30 (b)
6264LP-15	1-9	3.25 (a)
	10 +	2.75 (b)
8721 disc controller		40.95 (a)
Acorn DFS 0.9		48.95 (a)
Acorn DNFS 1.2		59.95 (a)
Acorn 1770 DFS		48.95 (a)
Acorn ADFS		28.95 (a)

DRIVES

Mitsubishi (2yr warranty)	
80tr d/s single	126.95 (s)
80tr d/s + PSU	149.95 (s)
80tr d/s dual	254.95 (s)
80tr d/s dual + PSU	289.95 (s)
80tr d/s dual + PSU	
in Master Bridge	319.95 (s)
GRW01-	
20MB Winchester + PSU	755.00 (s)
GRW02- 20MB Winchester,	
40/80 drive + PSU in Master bridge	919.00 (s)
GRW03 - 20MB Winchester, 40/80	
drive 10MB Tape streamer + PSU in	
Master bridge.	1616.00 (s)

MONITORS

Microvitec 1451 Med Res	265.00 (s)
Microvitec 1441 High Res	435.00 (s)
Mitsubishi 1404 Med Res	265.00 (s)
Philips CF114 TV/Monitor	199.00 (s)
Kaga KX1201G Green Screen	103.00 (s)
Kaga KX1203G Amber Screen	120.00 (s)
Philips 7502 Green Screen	84.95 (s)
Philips 7522 Amber Screen	86.95 (s)
Philips 7542 White Screen	86.95 (s)
Hantarex HX12 18MHz Green Screen	79.50 (s)
Tilt & Swivel Stand	17.95 (c)
All monitors come with a BBC cable.	


PEARTREE

Profit Accounts package	97.00 (c)
Artist	53.00 (b)
Megamouse	65.00 (b)
Artist & Megamouse	97.00 (c)

DISCS

BULK OFFER ON 5" DISCS (LIFETIME WARRANTY)

10 X 40TR D/S D/D	8.95 (a)
10 X 80TR D/S D/D	9.95 (a)
20 X 40TR D/S D/D	16.95 (b)
20 X 80TR D/S D/D	18.95 (b)
50 X 40TR D/S D/D	41.95 (c)
50 X 80TR D/S D/D	46.95 (c)
3 1/2" DISCS Box 10 D/S D/D	23.00 (b)

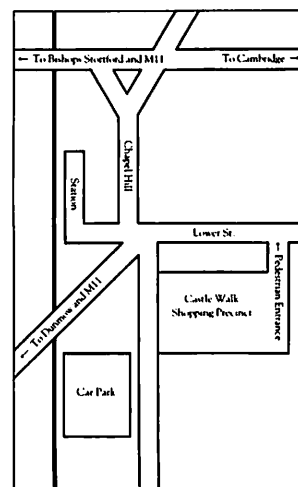

ALL PRICES INCLUDE V.A.T. @ 15%

DEALER ENQUIRIES WELCOME
EDUCATIONAL AND
GOVERNMENT ORDERS WELCOME
ALL ORDERS ARE DESPATCHED WITHIN
24 HOURS STOCK ALLOWING
PRICES SUBJECT TO CHANGE WITHOUT
PRIOR NOTIFICATION
POSTAGE RATES -

(a) 75p	(b) 1.25p	(c) 2.00	VISA
(s) Securitor £6.00 service			


NEW PRODUCTS

ADVANCED PRINT BUFFER is a program that runs in sideways RAM and provides a large printer buffer, instead of the resident 63 bytes. Large means over 14K (14 700 characters) allowing letters, reports, documents, listings etc. to be printed while you carry on with another task. Full control is provided to switch buffer on/off, purge buffer, even changing the effect <ESCAPE> has on the buffer (essential when using w/procs such as View) (5¼ ADFS) /B/M/C £5.95

ADVANCED ELITE FS allows Master users to run their BBC Elite program disk on the Master or Master Compact (5¼ ADFS) /M/C £5.95

ADVANCED BBC DFS E00 enables B+ or upgraded B users to run 1770 DFS at @ E00 when used in 16K sideways RAM (5¼ DFS) /B+ £19.99

Advanced Computer Products

The following ACP products:
Advanced Disc Toolkit
Advanced Disc Investigator
Advanced ROM Manager
Advanced 1770 DFS
are all  compatible

ADVANCED DISC TOOLKIT

(01) /M/B/E/C £34.50

Any Acorn user including Master, BBC B+, Electron, DFS, 1770 DFS, ADFS, 2nd. & co-processors A.C.P.'s BEST SELLING product containing over 30 commands inc.: - powerful memory & disc editor, search memory/disc/basic, catalogue/unplug ROMs, load/run programs below page, automatic menu, file transfer (inc. locked cassette files), ADFS utils etc. etc. ("it's superb" ... Database Pubs. - "A top-class toolkit - I have no hesitation in recommending it ... Acorn User Nov. 86)

(16K EPROM & FULL MANUAL)

ADVANCED ROM ADAPTOR 2

(03) /M/E+1/ £14.95

An Acorn approved cartridge containing a card with special 'zero' profile sockets that allow you to fit compatible 8K or 16K EPROMS/ROMS. The cartridge is fully enclosed providing complete protection for your ROMS. Simple to use -no switching-complies fully to the Acorn (sideways) Rom Filing System. A.R.A.2 contains 2 sockets.... A single adaptor is also available....

A.R.A.1 (02) /E/ £10.35

ADVANCED SIDEWAYS RAM

(04) /E+1/ £29.90

A highly versatile but simple to use s/w RAM cartridge that is automatically write protected on loading. Contains 16K RAM but can be switched (externally) to 2 X 8K RAM. Supplied with instructions & full software support (on cassette) to save ROM images to disc/tape, load RAM from file, Advanced Print Buffer & MakeRom a utility to merge several files from disc to be run from the ROM FS.

(S/Ware on disc : please add ...
£1 5¼ DFS .. £2 3½ ADFS)

ADVANCED ELECTRON DFS

(05) /E/ £24.15

Electron & Plus 3 users ... gain BBC compatibility by adding the Advanced Electron DFS (1770 DFS) this is the same disc filing system supplied with the BBC B+. Now you can produce and access (compatible) BBC disc based software. A.C.P. also supplies 5¼" disc drives to add to your Plus 3 (inc. 2nd. drive adaptor). "ACP has produced another superb ROM for the Electron" ... Electron User Feb '86

(supplied on 16K EPROM + DFS MANUAL)

ADVANCED DISC INVESTIGATOR

(06) /M/B/E/C £28.75

A very powerful Disc utility for standard & non-standard discs. Backup most protected discs, edit any type of non-standard disc, check & repair faulty tracks, create new disc formats, copy 40track discs to 80track discs, verify two non-standard discs.

("ADI features an extremely comprehensive sector editor, and one of the finest I've seen" ... Tubelink on Prestel)

(supplied on 16K EPROM + manual)

ADVANCED ROM MANAGER

(07) /M/B/E/C *£14.95*

A friendly utility for ROM & sideways RAM. Examine ROM/RAMs, load files into RAM, move memory to/from Sways ROM/RAM, catalogue/kill ROMs, offer commands to specific ROMs, save ROMs to disc/tape, AUTOROM a file (inc. BASIC) to run from Sways ROM/RAM, execute specific machine code subroutine in a ROM, generate a ROM's checksum & CRC.

ON ALL ORDERS RECEIVED AFTER 29TH AUGUST
(supplied on EPROM + manual)

ADVANCED PLUS 4

(08) /E+1/ £79.98

"DISC DRIVE COMPATIBILITY AT LONG LAST" ... (Electron User June '86) this sums up AP4 & ACP's approach to producing products. AP4 is a fully ACORN compatible disc I/face & will accept any standard drive inc. PSU, runs 1770 DFS (as fitted in the B+ & Master), keeps page & E00, utils in ROM & provides a spare rom socket. "ACP's PLUS 4 comes out on top. I can recommend it to anyone..." (E.U. June '86)

...AP4 should be considered the standard interface for the Electron (AU July '86)

AP4 100 £198.97 (inc VAT & delivery)
AP4 400 £228.98 (inc VAT & delivery)

ADVANCED PLUS 5

(09) /E+1/ £66.70

A triple interface cartridge providing...

- 1) a TUBE i/face allowing a second processor to be connected, increasing BOTH speed & memory (PAGE & 8000 HIMEM & 8000 in all modes)
- 2) a 1 MHz BUS for control applications & prommers
- 3) the USER PORT for mouse and graphic devices.

Also contains 2/3 ROM sockets and on board operating software for 2nd processor.

ADVANCED 1770 DFS

3 versions ADM/C(11) - ADB(12)

ADE (13) £34.50

ACP have totally re-written the Acorn 1770 DFS, enhancing existing features & adding new ones. The result is probably the fastest & most powerful disc filing system your computer could have. With the ability to operate in double density occupying both sides of a disc (640K). Automatic file relocation, improved file handling, 62 file catalogue and Sways RAM can be used as a fast RAM DISC.

(16K EPROM + comprehensive manual)

ADVANCED ELECTRON DFS E00

(14) /E+ASR/ £19.99

An alternative to our AED(05) for Plus 3 and ASR users. This optional alternative DFS is designed for use in Sideways RAM (ASR) and allows the user to operate a disc filing system & E00 when using the Plus 3 (in ADFS page would normally be & 1000). The DFS is simply loaded using the software supplied with the ASR from disc. (optional upgrade for existing AED users £9.50 on return of original EPROM) (3½" ADFS disc + manual)

OTHER PRODUCTS & SPECIAL OFFERS

VIEW cartridge	(101) /E+1/	£ 12.95	3½" discs in 1/box(120) /M/B/E/	£24.00
Vsheet "	(102) /E+1/	£ 12.95	5¼" discs ds/dd " (121) /M/B/E/	£12.99
VIEW & VSHEET	(119) /E+1/	£ 19.00	5¼" discs ss/sd (122) /M/B/E/	£ 8.99
LISP cartridge	(103) /E+1/	£ 9.99	3½" disc drives (please call for price)	
E/Adv User Guide	(104) /E/	£ 3.95	5¼" disc drives (please call for price)	
TURTLEgrhpCASS	(105) /E/	£ 3.99	2nd. Drive Adaptor(130) /E+3/	£ 7.95
LOGO cartridge	(106) /E/	£ 39.95	3½" library box 10(124)	£ 2.95
PASCAL cartridge	(107) /E/	£ 39.95	16K EPROMS (131)	£ 3.75
VIEW pack BBC	(118) /B/	£ 49.00	VIEWSTORE (117) /M/B/(e)	£57.95
AP4 100	(140) /E+1/	£198.97	Acorn Plus 1 (150) /E/	£39.95
AP4 400	(141) /E+1/	£228.98	VIEWPLOT (142) /M/B/	£26.95

Equipment codes /M/= Master /B/=BBC /E/=Electron /E+1/=Electron+Plus 1 /C/=Compact

Please send order to:
Advanced Computer Products Ltd.
6 Ava House, High Street,
CHOBHAM, Surrey, England
GU24 8LZ. Tel. 0276 76545
(mail order only)

All our prices include
UK delivery & VAT



(in event of any query -
please include your tel. no.)

NAME

ADDRESS

POSTCODE

TEL.

CREDIT CARD No.

PROD
NO

PRODUCT

QTY

@

TOTAL

I enclose payment for £.....
Exp date (A19)

SEE OUR OTHER ADVERT ON PAGE 98

NEWS

Comms come to Acorn User

Acorn User is to launch a regular communications column next month covering Prestel, Telecom Gold, TTNS and the like. If you have anything to tell us, write to 'Buzby', *Acorn User*, 141-143 Drury Lane, London WC2B 5TF.

In the meantime, here's some of the latest tit-bits:

- Telecom Gold users who have joined via MicroLink can get the most out of it by obtaining the official manuals – just type REQUEST MANUALS at the chevron > prompt.

- The demise of Prestel-based information provider Timefame has left many 'Micro-Board' fanatics unhappy. However, Timefame is to open up its own dial-up service.

Users may be worried about non-local call costs, but when BT install new technology, more private databases will be able to share their services nationally at all baud rates.

Living on the now rather low-tech Prestel system is expensive, and this new facility may indeed lead to more information providers starting off-Prestel databases.

- Prestel's promised keyword searching is now going through its final testing stages. Several Prestel users have already encountered completely unexpected messages.

- Compunet, the multi-user system for Commodore users, will be opening its lines to the Beeb world, producing a dedicated comms package.

Compunet takes advantage of the Commodore 64's sophisticated text manipulation and graphics which the Beeb software will have to allow for. Compunet electronic mail is comparable to Telecom Gold.

Buzby


Software battle for Christmas

Superior and Firebird will be fighting it out for the number one BBC spot this Christmas, with a clutch of new games.

Firebird sees its *Cholo* as the new *Elite*, with similar wire-frame graphics in an adventure format. But Superior has *Repton 3* to continue the huge success of this Tim Tyler ladder and platform series.

Repton 3 features the mind-damaging puzzles of the first two, with the ability to build up your own version of the screens and creatures. There are 24 screens and ideas to hurry you up such as a time bomb and a growing fungus.

And both companies have other titles to bolster their sales. Superior's *Stryker's Run* has amazing graphics and the ability to make use of the extra



Cholo: the new Elite?

memory of the Master. The BBC and Master versions come on the same tape or disc.

Sentinel from Firebird is a 3D strategy arcade game by Geoff Crammond, who did *Revs* and *Aviator*. The graphics are produced by fractal routines and there are 10,000 levels to get through!

Meanwhile Tynesoft is continuing to build its reputation among Electron owners with a series of low-cost releases. Martech has a graphic adventure for BBC micro and Elec-



Stryker's Run: great graphics

tron: the player is Tarzan and rescues Jane from the hostile natives. A real swinger at £8.95.

Many of the batch of promised titles for the Compact failed to appear at the launch, but these are now coming on stream in the 3.5in disc format. Superior's compilation of Acornsoft's games and BBC Soft's *White Knight* chess should be in the shops.

Prices are still just under £10. Superior's are £9.95 for tape, £11.95 for BBC disc and £3 more for Compact versions.

CAD and CAM software

Edusoft has released computer aided design and computer aided manufacturing packages for schools or business users.

Educad allows the construction of diagrams and figures, and gives hard copy with printer dumps off screen. It costs £92. Educnc is the CAM pack-

age and provides tool paths and profile definitions from Educad designs. It has a general numerical control processor for direct links to machining tools and costs £39. Edusoft, 15 Tamworth Business Centre, Amber Close, Amington, Tamworth, Staffs, B77 4DS.

Mouse with art package

ATPL is selling a mouse packaged with art software. Mousepac costs £55.20, for mouse, control software on chip and art program on two discs.

It is compatible with screens

from AMX software, and runs on the BBC micros (B, B+) and Master. A version for the Compact is due. Contact ATPL, Station Road, Clowne, Chesterfield S43 4AB.

Program checks AU listings

Readers who have problems typing in listings can send for a free copy of checksums for this month's issue.

Simply run the special program provided to give you a series of numbers relating to the number of characters in each line of a listing. If these don't tally with the printed checksums, then you can tell which lines are at fault.

Just send a large self-addressed envelope with a 24p stamp to: *Acorn User* Checksums, PO Box 641, London NW9 8TF.

TOGETHER FOR THE FIRST TIME

20 MB WINCHESTER 10 MB TAPE STREAMER 1 MB FLOPPY DRIVE



The Nucleus 20 from UFD for only £1799.95 inc VAT

Well they say two's company and three's a crowd, but not with the new Nucleus 20 from UFD.

The Nucleus 20 is the only BBC compatible mass storage unit featuring an in-built 20 MB Winchester, a 10 MB Tape Streamer for back-up security, and an 1 MB 5¼ DS Disk Drive with 40/80 track using ADFS to offload data onto hard disk.

All neatly packaged in one unit, your BBC sits underneath, with your monitor on top. The unit has its own power supply so you can plug it straight into the mains, and comes complete with all necessary connections.

All these features cost a lot less than you think, and they're backed by a 2 year Gold Standard Warranty. Ask your dealer for details, or telephone Akhter on (0279) 443521.



AKHTER COMPUTER GROUP
AKHTER HOUSE,
PERRY ROAD, HARLOW,
ESSEX CM18 7PN
TEL: (0279) 443521
TELEX: 818894 AKHTER G

Dealer Enquiries
Welcome



An Akhter
Group Company

Network managers demand more time




Still in the Castle

Next month


Start the New Year the way you mean to go on and order next month's *AU* right away.

The Nightmare continues as Mark de Weger shows how to design your own screens for use with this month's block busting game. Peter Sandford returns with the program that so many of you have asked for, *DataPlot*, a sophisticated graph



DataPlot's sophistication

plotting program comparable to packages costing tens of pounds. *Kiddie Art* is a superbly easy to use graphics program for all the family. David



Kiddie Art: hours of fun

Atherton shows Compact owners how to perform the serial upgrade and dial into a Bulletin board, and how to transfer programs cheaply from 5.25in to 3.5in disc. David Lawrence presents instant pull down windows. And we take you on a tour around the new Superior Software blockbuster *Strykers Run!* Plus all your regulars.

A plea for more of teachers' time to be allocated to network management was repeated by several speakers at the Econet Conference last month.

This was highlighted by George Hawes of Brackenhale School. He said that networks in Berkshire schools were allocated at most five per cent of one person's time. The annual running cost was £100-£700, with most schools spending less than £300.

High cost

The conference began with Colin Monson, Berkshire's computing adviser, taking Acorn to task about the cost of Econet software. He claimed the charges for network licences were 'totally unreasonable'. This was later hotly con-

tested by the software writers.

Colin Monson also called for the establishment of standards for teaching computing, and stressed the need to publicise the role of network managers.

Three speakers took networking onto another plane. Chris Dawkins showed what could be done by 'immersing' pupils in computers, with electronic noticeboards used by everyone from the head down, 45 micros, 2.5km of cable, one and half people to look after it all and £15,000 a year to spend.

Acorn's Lawrence Hardwick discussed the esoteric: ISDN, X25, X21, IDA and Kilostream linking networks into telephone systems. Kim Spence-Jones of SJ Research took the opportunity to 'launch' Streamline, an electronic mail system,

designed to run with auto dial and answer modems overnight, saving phone charges.

Nets in use

Acorn User's David Acton explained how Redwood Publishing produces more than 500,000 magazines a month without a typewriter in the building. He also took a swipe at how difficult some programs and Econet itself were to use.

Practical talks came from George Hawes, Robin Newman of Oundle School (who demonstrated four BBC micros playing music synchronised across the network), and Andrew Gordon from SJ.

Copies of the talks are available from ME Electronics, 5 Hatherley Rd, Reading, Berkshire RG1 5QA.

Micros root out those family trees

A survey by the Society of Genealogists has revealed that 35 per cent of its members using a computer have a BBC micro. The SoG 1000 subscribers to its 'Computers in Genealogy' newsletter, using 329 different machines.

Don Francis, a major contributor to the newsletter, conducted the survey and said the BBC micro had become the 'model T' micro of the genealogy world'.


With the help of his Master, Don Francis has traced all lines of his family tree back to 1562 and has over 40 discs of ancestral records. He said 'anyone who has a micro and is interested in family history can-

not resist putting it to use'.

Most genealogists have used Bel Tech's *Belgen* software, but now the SoG has commissioned Bel Tech to write a more suitable program, *Heritage*, due in the new year.

Heritage is a database and runs on the B, B+ and Master with DFS and ADFS. It offers up to 1500 records with variable length fields. The program offers search facilities and can even print out family trees. It is compatible with *Wordwise* and *View* and with data from *Belgen*. It will cost £30.

Most importantly, *Heritage* can use and produce data in the 'Gedcom' standard for the Mormon Church's mainframe



Logo of SoG, founded in 1911

facilities in Salt Lake City, which hold over 10 million records and provide an important source of genealogical data.

The SoG has 9000 members and publishes a quarterly magazine. The 'Computers in Genealogy' newsletter costs £5 a year with £1 discount to members of the SoG or the British Computer Society. Contact the Society of Genealogists, 14 Charterhouse Buildings, Goswell Road, London, EC1M 7BA.



BULLSEYE

Millions enjoy this popular TV darts game, and now you can join Bully on the oche where you aim to win and throw to answer! A good arrow and you can pick your favourite topic ranging from Food to Pot Luck – a correct answer, and you're on your way! Do you want to gamble! £8.95

BLOCKBUSTERS

Sixty million people every week watch Blockbusters, Britain's most popular TV quiz game! Now, thanks to Macsen software, you can actually be a contestant, recreating the excitement of the TV studio in your own home. Our Question-master follow-up give you 500 more questions, plus the chance to insert your own – be your own Bob! £7.95

GOLD RUN

Can you beat a path through the hexagons to go for gold? The tension of this sister-game to Blockbusters is terrific, as the contestant struggles to complete his path against the clock. Adjust your own answering time to push yourself harder! £9.95

Macsen Software presents television's most popular programmes for your computer.

With our productions you can take part in your favourite programme and turn your living room into the television world of stars and sagas.



BLOCKBUSTERS & GOLD RUN
Now available for C16

17 Maes Nott, Carmarthen, Dyfed SA 31 1PQ. Tel: 0267 232508

THE WINNING HAND THIS CHRISTMAS.

Blockbusters, Bullseye, Gold Run, Treasure Hunt and EastEnders available on: Commodore 64, Spectrum 48K, BBC Model B, Electron, Amstrad. Countdown on Commodore 64, Spectrum 48K, BBC Model B, Amstrad.

All games available from leading computer departments and computer stores.




Graphics prize

A British student has won first prize in the Art Show at the international computer graphics exhibition, Eurographics, in Lisbon, Portugal.

Semannia Luk Cheung, a postgraduate studying Computer Animation at Middlesex Polytechnic, received the prize for a frame from her animation sequence 'Soliloquy' of a robot dancing at Stonehenge. The complete work has been exhibited in Australia and the USA.

Picaso and Prism software was used VAX mainframes. Inspiration for all you budding Beeb artists!

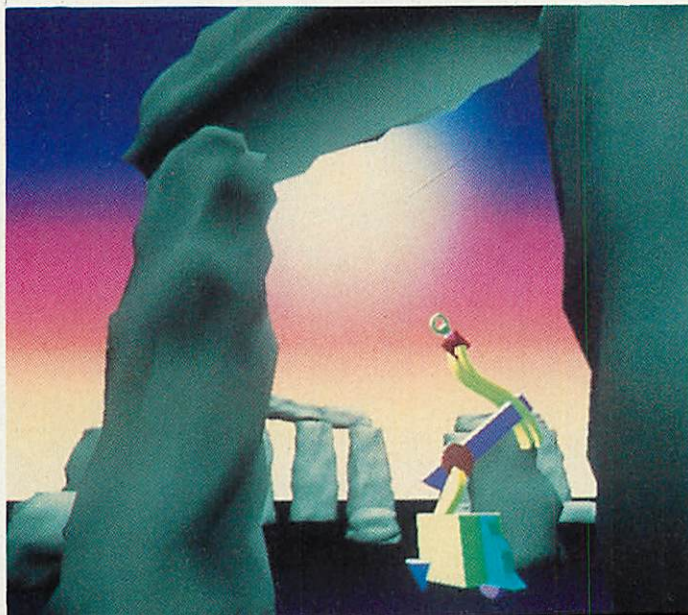

Frame from Semannia Luk Cheung's animation sequence 'Soliloquy'

Master 'recall'

Acorn is still waiting to hear from owners of Masters purchased before June 1, who have not had the battery replaced.

Acorn 'recalled' all Masters sold before then after identifying a possible problem with the Lithium batteries in early models. Dealers will replace battery packs free of charge.

Anyone who hasn't, should therefore contact as soon as possible the dealer where the Master was purchased. Dealers who have carried out this service are asked to return to Acorn the special forms giving details as soon as possible.

Database for child care

Management Data Systems (MDS) is developing for child care monitoring a version of its MPSS database software.

This follows the success of both its £300 Juvenile Justice Monitoring System, which has analysis features which have been helping local authorities modify policies and cut costs, and the original MPSS, which was introduced three years ago.

A number of schools use MPSS for administration, one having even set up a complete database to store and correlate academic profiles, personal profiles, careers information and private records for every pupil in the school.

MPSS is a powerful database costing £115 which runs on a standard BBC micro. It uses up to four disc surfaces for a single file, so can create files of up to 7000 records each with 100 characters. By searching 20 fields at once, access time to a record is typically just one second. It is also a statistics generator, using a macro language to produce tables of comparative data throughout a file.

Contact Management Data Systems, 108 Parthenon Drive, Liverpool L11 7AQ.

Electron runs RISC chip

by Geoff Baines

Advanced Computer products (ACP) has set out to bring the Electron up to full BBC micro specification, by way of its Plus 5, which plugs into one cartridge slot in Acorn's Plus 1 and provides Tube, 1MHz bus and user port interfaces.

This fulfils a promise made by Acorn, who have now largely abandoned the Electron, at the machine's launch.

The Plus 5 also has two free sockets for ROM chips and a third for the software to run the interfaces. ACP says the Plus 5 can control most add-ons for these interfaces on a BBC micro, including 1MHz bus add-ons, and claims the Acorn 6502 and Z80 second

processors work perfectly. In fact, the company has demonstrated an Electron using the Plus 5 Tube interface running Acorn's prototype RISC (reduced instruction set computer) second processor - costing around £4000.

More affordably, ACP is selling for £69 a version of the AMX mouse package with AMX Art, adapted as the Plus 5 user port is at a different memory location to the original Beeb version. The other AMX packages are being adapted and so possibly are the Grafpad and a robotics package.

The Plus 5 costs £66.70 from ACP, 6 Ava House, High Street, Chobham, Surrey, GU24 8LZ.

Bulletin for MIDI

The Access bulletin board covers most computer subjects and has a section on computers used with MIDI musical instruments. It runs 24 hours a day, seven days a week on (0905) 52536. Initial access to Access is free but up to five levels of privileged access are available for £1 a time.

Spider

In the October issue of *Acorn User*, an article by David Johnson-Davies and David Deutsch was published describing a curve-plotting program under the title 'Spider Power'. The term 'Spider' is used by Paul Fray Ltd of Cambridge as a trademark for a range of real-time control products for the BBC and Master micros. *Acorn User* would like to apologise for any confusion caused by the use of the term 'Spider'.

Specialists link up on Enthusinet

BBC micro users with nowhere to turn for advice can now try Enthusinet.

Set up by Marlboro' Computer Services, it aims to put users in touch with a nationwide chain of local specialists in just about every aspect of using a


BBC micro and peripherals.

Wordprocessing, newsheet design, fault diagnosis, EPROM blowing and graphics are all covered, and Enthusinet offers local demonstrations for software and hardware.

Enthusinet is looking for

specialists to join the organisation, who pay a yearly subscription and negotiate with the users for individual fees.

Contact Enthusinet, Marlboro' Computer Services, Upper Springfield Road, Uplands, Stroud, GL5 1SN.

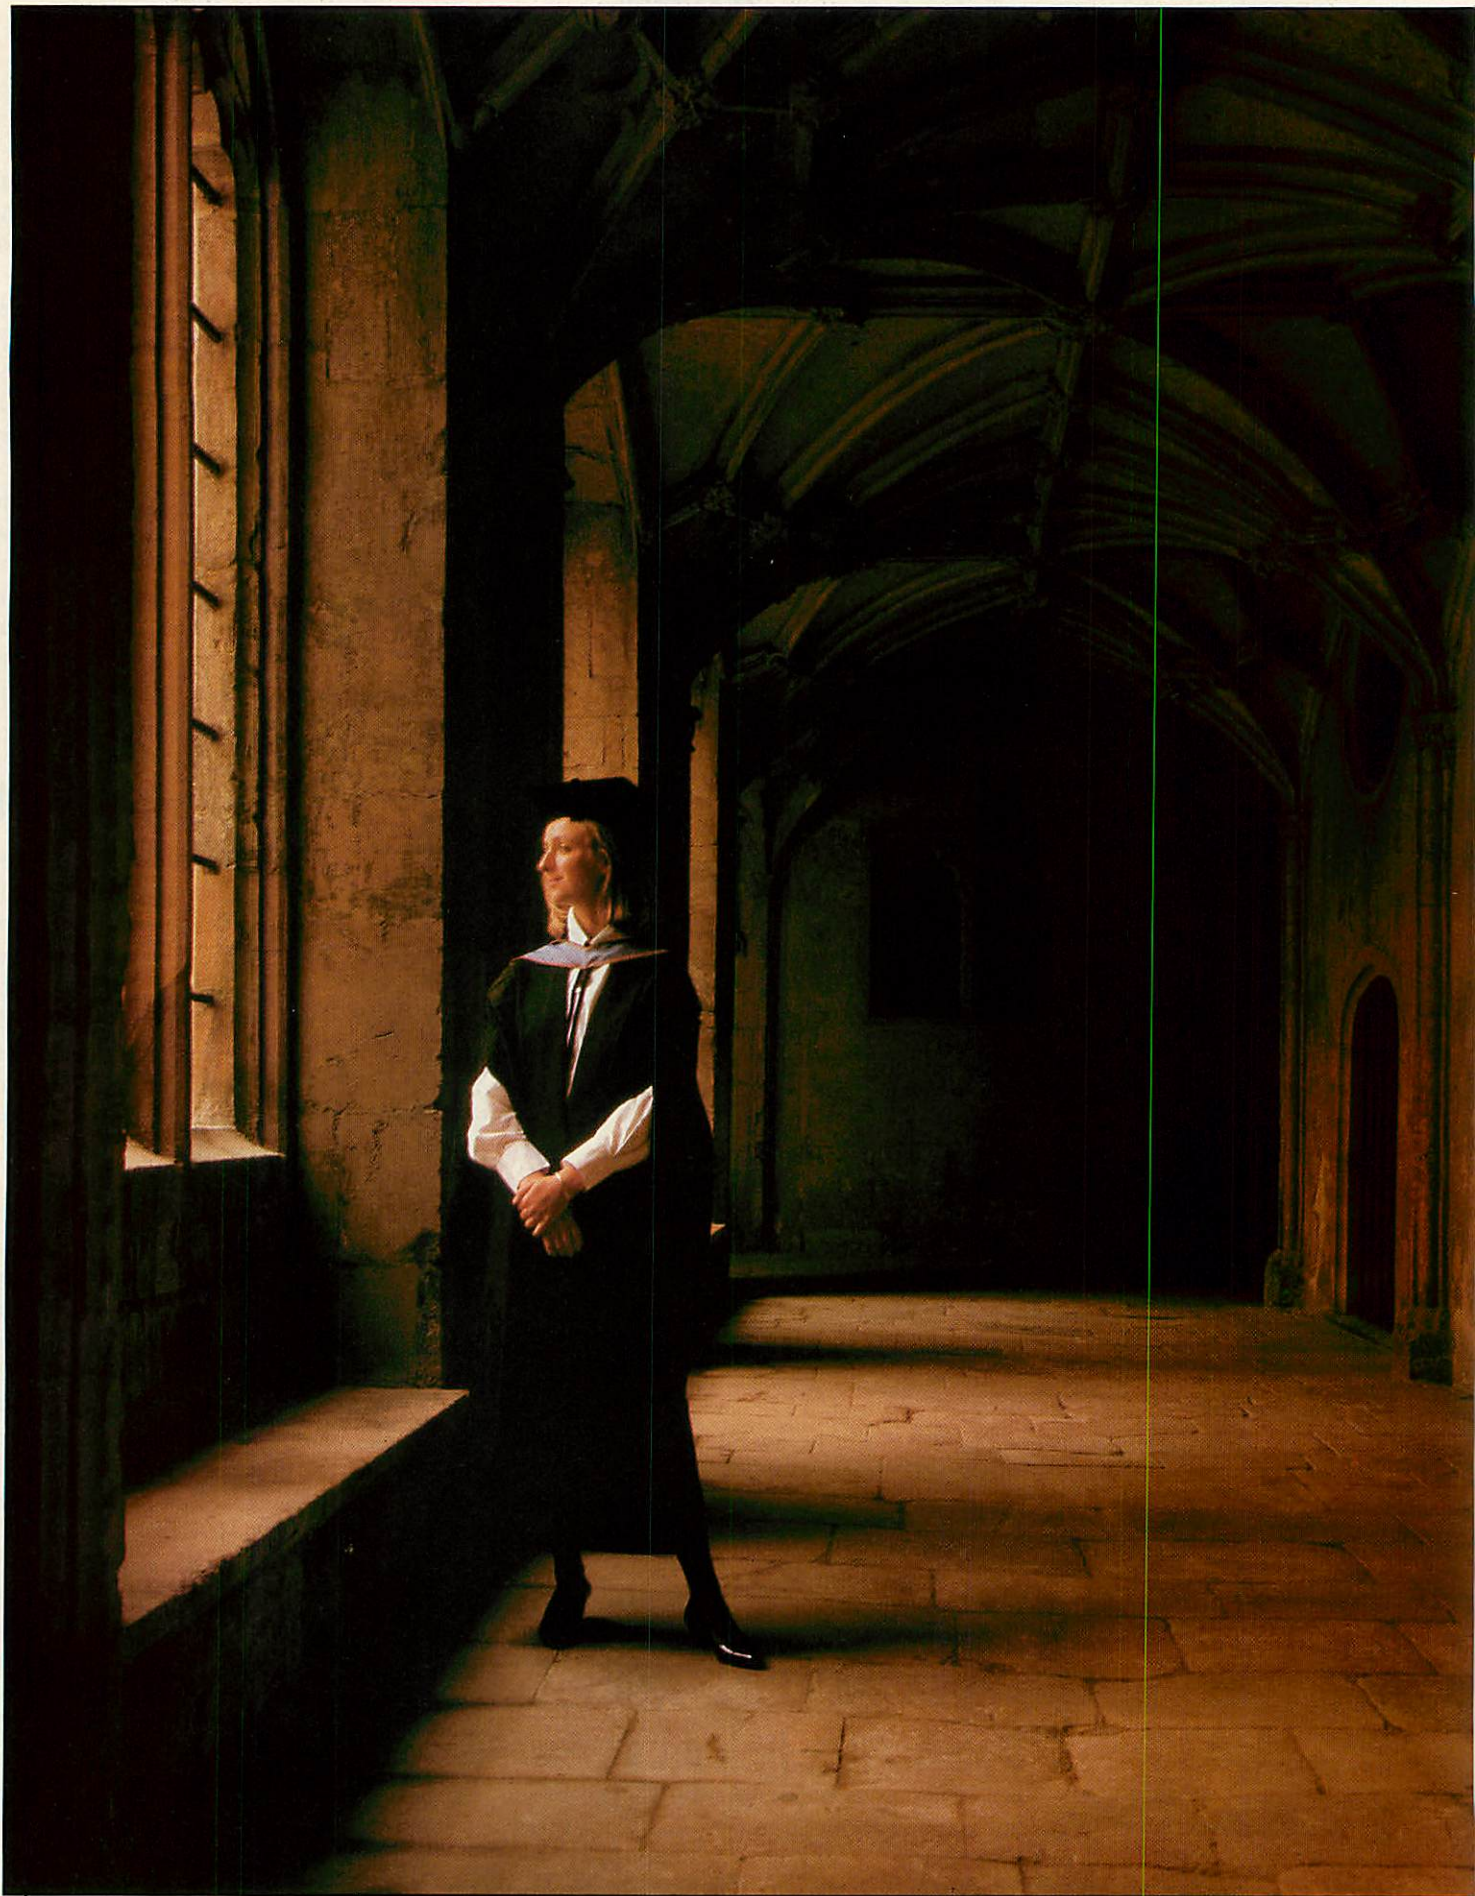

Compact

BRITISH BROADCASTING CORPORATION
MASTER SERIES MICROCOMPUTER

AU3

The BBC Master Compact

The BBC Master Compact. Think of it as a down payment on your child's future uniform.

Your child's degree ceremony may seem a long way off.
But the BBC Master Compact is equipped to help at every
step of the way.

Firstly, the Master Compact is compatible with the BBC
micro they are likely to be using at school.

A distinct advantage when it comes to gaining confidence
with computers.

Our new micro can provide your child with constant
support throughout education, eventually graduating onto
business and professional use.

For example, the Master Compact's wordprocessing power
could help many aspiring novelists to produce their first
literary masterpiece.

Our wordprocessing package has already proved popular
with over 100,000 users.

The BBC Master Compact fits the BBC micro's benefits
into a complete, easy to use package.

This includes colour monitor, processor, disc drive and
enough practical software to keep you and your children
occupied indefinitely.

Why not have a chat with your
local Acorn dealer or specialist retailer
about the computer that equips your
child for life.

Put it on your Christmas list. It
should help put a few letters after
your child's name.



THE MASTER COMPACT 128K RAM, 3.5" DISC DRIVE, PRINTER AND JOYSTICK INTERFACE. SOFTWARE INCLUDES VIEW WORD PROCESSOR, ABC, CARD INDEX, LOGOTRON LOGO, WINDOW-DRIVEN DESKTOP SYSTEM, ADVANCED DISC FILING SYSTEM, 14 PROGRAM WELCOME PACK AND 4 TUTORIALS. BASIC PRICE £399 WITH MONOCHROME MONITOR, £469 WITH HIGH RESOLUTION (0.42 PITCH) COLOUR MONITOR (AS ABOVE) £599. ALL PRICES PLUS VAT. FULL DETAILS FROM BOB COATES, DEPT AU3, ACORN COMPUTERS LTD., CAMBRIDGE TECHNOPARK, 645 NEWMARKET ROAD, CAMBRIDGE CB5 8PD.

t. Equips your child for life.

Acorn
The choice of experience.

Join Daley in these **8 NEW** arcade events
to test your skill and stamina

Daley Thompson's SUPER-TEST



PISTOL SHOOTING



SPRING BOARD DIVING



TUG O' WAR



CYCLING




PENALTIES



GIANT SLALOM



ROWING

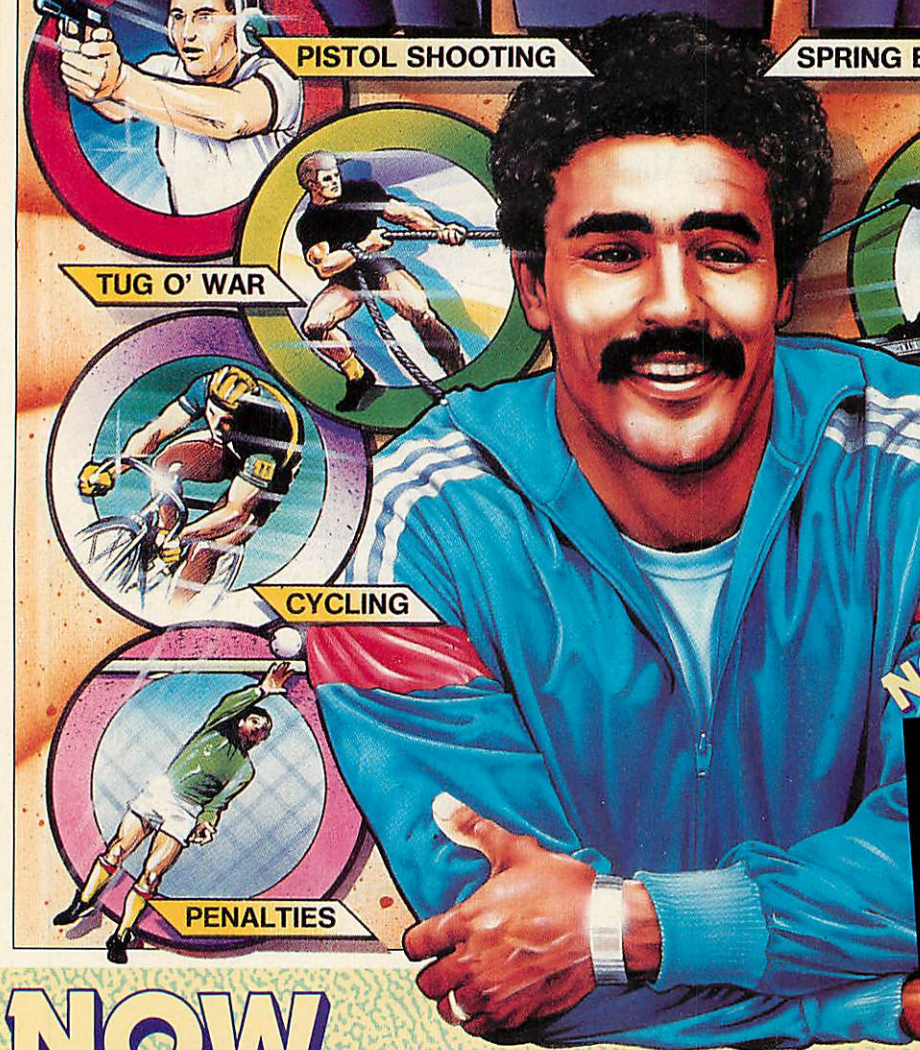

for C16
and
PLUS 4
computers
only
6.95

NOW RELEASED ON

SPECTRUM 48k 6.95 BBC MICRO 8.95 COMMODORE 64 7.95

Ocean Software is available from selected branches of:

WOOLWORTH, WHSMITH, John Menzies, LASKYS, Rumbelows, COMET


Spectrum Shops and all good software dealers.

ocean

Ocean Software
Ocean House · 6 Central Street
Manchester · M2 5NS
Telephone 061 832 6633 · Telex 669977 Oceans G

News in brief

● CA Special Products make a 68000 second processor for the BBC micro. The £299 Casper board has 128K RAM and a eurocard connector for further expansion. A 32K EPROM



Casper: uses a 68000 chip

allows assembler programs to be written and transferred between Beeb and 68000 board. CA Special Products, Moss Way, Donibristle Industrial Estate, Dunfermline KY11 5JW.

● Acorn User and School Computer User will be represented at the third High Technology and Equipment in Education exhibition at the Barbican Centre, London on 21-24 January. EMAP Exhibitions, 34 Farringdon Lane, London EC1R 3AU.

● Logotron has a £15 interactive games generator to accompany the £34 Pendown word processor. Like Pendown it is aimed at children. Contact Logotron, Dales Brewery, Gwydir Street, Cambridge CB1 2LJ.

● Resource has launched the first hardware add-on for the Compact allowing hardware that uses the user port on the Beeb or Master 128 to work with the Compact. It costs £14.95 from Resource, Exeter Road, Doncaster DN2 4PY.

The price of Acorn User has increased by 5p to £1.30 this month as we have been forced to pass on part of the seven per cent rise in paper costs caused by the fall of Sterling. Subscription prices remain unchanged. Just think of the quality, feel the width, and look at the goodies coming up (see page 9). Compare Acorn User to the rest – there's still no better value.

Flight plan program set to take off

There may soon be a BBC micro at every airfield in the country thanks to Ian Fisher, a Beeb owner and qualified private pilot. He has written a program to cut out the tedious and time-wasting calculations every pilot must complete before take-off.

Magnetic headings and flight times must be calculated for each leg of every journey according to the wind conditions predicted. This is currently done with a map, weather forecast and a slide rule and can take half an hour.

Using Ian's software, a pilot need only enter the waypoints (turning points identified as landmarks on the ground) in latitude and longitude, or as a series of internationally recognised codes for airfields and radio beacons.

A couple of seconds is all the



Take off time reduced by Ian Fisher's program

Beeb needs to make the calculations. The flight information is then displayed on the screen and printout produced for the cockpit. The program is based on similar software running on IBM PCs at US airfields, and took two years to write.

When it was shown to the CSE Aviation flying school in Kiddlington, the instructors

there were so impressed they thought it would be worth airfields and air taxi services buying a BBC micro system just to run Ian's program.

It is now being marketed by Paean Systems as *Flight Plan II*, supplied complete with a database of radio beacon and airfield locations. Versions for European countries and Australasia are available. *Flight Plan II* costs £35 from Paean Systems, Little Bealings, Woodbridge, Suffolk IP13 6LT. Tel: (0473) 623757.

For pilots still on the ground, *Micro Nav* is a training package for instrument flying. Essentially a flight simulator, *Micro Nav* accurately reproduces a plane's instrument panel and flight conditions.

It costs £28. Contact Micro Nav, PO Box 24, Wokingham, Berkshire RG11 5BW.

AU in British Council push

Overseas readers can now see their favourite magazine at British Council offices in more than 80 countries.

The Council promotes British culture and technology abroad and has chosen *Acorn User* to accompany its push of the BBC micro and software in other countries.

Copies of *Acorn User* will be available in the libraries and

exhibition centres in British Council offices worldwide. Each month's issue will appear at the Council's offices before going on sale in local shops.

Of course, the best way for overseas readers to ensure they get *Acorn User* regularly on time each month is to take out a subscription. Details of this are available at British Council offices too.

Musical bulletin board network

A novel way to organise some of the countless bulletin boards has been set up by Musictel, by incorporating them into their Network. Callers to any board can send messages to others without phoning long distances or hunting out other boards.

At present the connection between the boards is via the services of British Telecom, but Musictel plans to handle this itself within a couple of years. The system is paid for by advertising, with free access.

The Musictel bulletin boards

are biased towards music, instruments and other subjects for musicians.

For details and to find the number of your local Network board, phone the main board. It operates at 300/300 or 1200/75 on 01-455 0843.

INSTANT

Now on a power-packed ROM board – the BBC Micro's top-selling 6-in-1 package. Included in it are all the highly-acclaimed features of Mini Office II . . . plus many exciting extras.



INSTANT

WORD PROCESSOR

Memory can hold up to 3,600 extra words. Text can be entered in 20 (enlarged), 40 or 80 column modes. New embedded commands for Epson compatible printers.

INSTANT

DATABASE

Room for an additional 150 average-sized records in RAM. Total capacity only limited by disc space.

INSTANT

SPREADSHEET

Provides 3000 extra cells, plus many more maths functions. Can run 40 or 80 column format.

INSTANT

COMMUNICATIONS

Bigger buffer capacity means much longer text files can occupy the BBC Micro's memory for uploading or downloading text.

INSTANT


GRAPHICS

Speedier switching to and from spreadsheet to create or amend bar charts, line graphs and pie charts with ease.

INSTANT

LABEL PRINTER

Labels prepared in the database can be quickly output in any format onto sticky labels

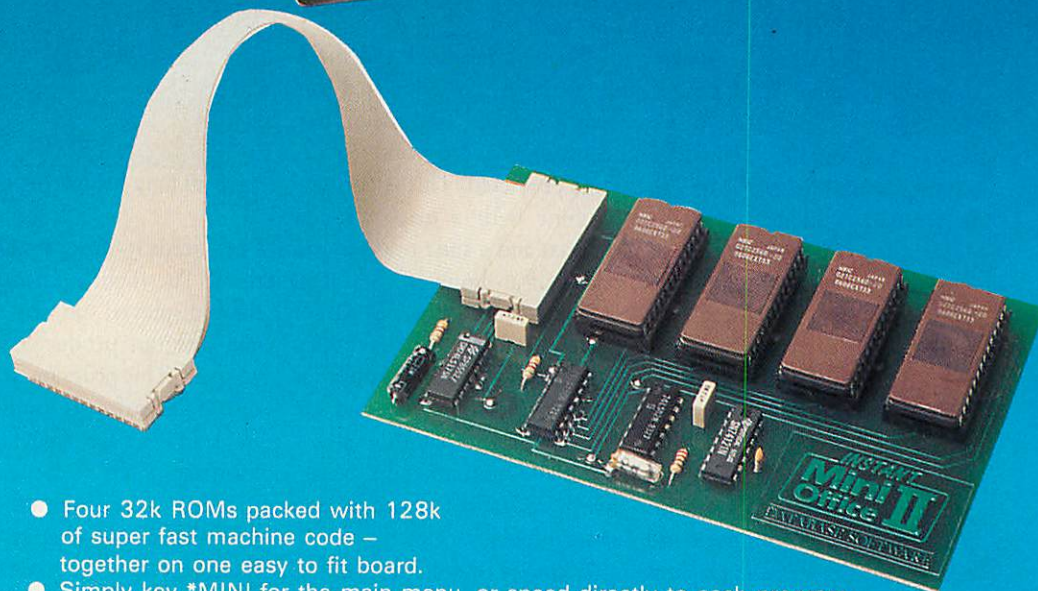

- Four 32k ROMs packed with 128k of super fast machine code – together on one easy to fit board.
- Simply key *MINI for the main menu, or speed directly to each program by keying *WP, *SP, *DB and so on.
- Switch from one application to another in a split second.
- Frees valuable RAM space for much more data.
- No need to swap discs if you've only one drive.
- Easy to install – slots into any sideways RAM socket.
- Works with Aries or Watford shadow RAM board.
- Compatible with BBC B, B+, Master and Compact.
- Compatible with all filing systems: tape, DFS, ADFS, and ECONET – and many third party DFSs.

ONLY
£59.95

Order Form

	£	p	
<input type="checkbox"/> Instant Mini Office	£59.95	2372	
<input type="checkbox"/> Upgrade Mini Office II to Instant Mini Office	£51.95	2375	
I enclose full tape/disc pack			
<input type="checkbox"/> Mini Office II cassette	£14.95	2368	
<input type="checkbox"/> 5.25" disc 40T	£16.95	2369	
<input type="checkbox"/> 5.25" disc 80T	£16.95	2370	
<input type="checkbox"/> 3" disc	£19.95	2371	

Add £2 for Europe; £6 for Overseas

- ☐ Cheque enclosed made payable to Database Publications Ltd.
- ☐ Please debit my Access/Visa credit card account.

Post to: **Database Software, FREEPOST, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY**

PHONE ORDERS: 061-429 7931 (24 hours)
ENQUIRIES: 061-480 0171 (9am-5pm)
PRESTEL ORDERS: Key *89 then 614568383
MICROLINK ORDERS: Mailbox 72:MAG001

Name _____

Address _____

Post Code _____ Tel: _____

Signed _____

Please allow 28 days for delivery.

Please quote credit card number and full address + Ref AC 12

The original Mini Office II is still available on tape and disc. Existing owners of tape or disc versions can exchange them for Instant Mini Office and save £8. See the coupon alongside.

News in brief

● Kosmos Software has 3.5in discs for the Compact. French, German, Spanish, Italian and Welsh language packs are £19.95 each. Contact Kosmos, 1 Pilgrims Close, Harlington, Dunstable, Bedfordshire.

● Glasgow-based People's Palace is a new BBC micro-biased bulletin board, including Beeb music programs. The board runs 6.00pm to 8.00pm and accepts 300 and 1200/75 baud. Phone 041-956 6537.

● Unisoft has upgraded its *Unistat* statistics package, adding a dedicated spreadsheet, the ability to handle missing observational data, extra operations and graph plotting. It costs £143.75. Unisoft has two new packages, *Lintpro* for linear/integer programming (£86.25) and *CPA*, critical path analysis software (£57.50). Unisoft, PO Box 383, London, N6 5UP.


● The Connect 1 interface from Phobox Electronics plugs into both the user and printer



Phobox for easy interfacing ports. It costs £35 from Phobox Electronics, Holworth House, Holworth, Dorchester, Dorset, DT2 8NJ.

● British Telecom has sponsored a book aimed at 14-18 year olds, 'Finding out about Information Technology'. Copies are available for £1.40 from CRAC Publications, Hobsons Ltd, Bateman Street, Cambridge, CB2 1LZ.

● The Island Logic Music System is available in a version compatible with Solidisk and Watford DFS's and with the Master and B+ 1770 DFS. Contact System, 12 Collegiate Crescent, Sheffield, S10 2BA.

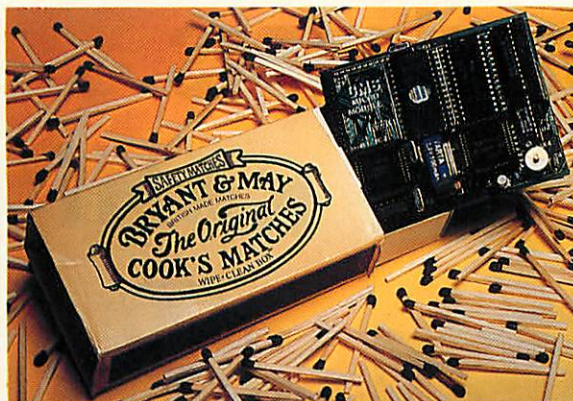

Microbeeb: highly adaptable surface mount technology

Micro micro

Cambridge Microprocessor Systems has produced the real compact BBC micro: a single board computer for control applications, with most of the Beeb's facilities. Yet it measures just 3.5 x 2.5 inches.

The Microbeeb board uses a conventional components and the latest in surface mount technology to pack a 6502-compatible processor, up to 64k RAM, up to 3Mb EPROM, three serial interfaces, four analogue inputs, 35 digital outputs, stepper motor driver, clock, network interface, 40 or 80 column and Teletext video circuitry, BBC Basic and more onto the tiny board.

Customising is possible, and prices start from just £49.95.

CMS expects the Microbeeb to appeal to industrial BBC micro users. Details from Cambridge Microprocessor Systems, 20 Pence Road, Cottenham, Cambridge, CB4 4PS.

'Soul nourishing' bulletin board

The Editor's moan about the lack of women in computing has been rebuked from a Talgarth, Powis hillside.

Mrs Eluned Hurn, a busy voluntary worker and grandmother, regularly uses a micro and runs a bulletin board.

The Honeytree bulletin board is altogether different to most. It is not a 'comic strip', Eluned said, covering the usual computer hints, but more like a 'woman's magazine' with 'soul nourishing' subjects. Poetry, farming, organic food, alternative medicine, herbalism, astrology and peace are all covered.

Eluned is very much for computers. 'I can now sit in the beautiful Welsh countryside and talk with people anywhere, without running up a great phone bill' she said.

However, she agreed there

are not enough women in computing and blamed the manufacturers. 'Women expect machines to work properly', she said, rather than 'tinker around and learn the technology' to get the best from their equipment.

But she has high hopes. 'When men started using kitchen equipment, it got better. Now women have started to use computers perhaps they will be better designed to cater for women's needs'.

Readers can dial into the Honeytree board on (0874) 711147. It is an 80 column scrolling system running at 300/300 baud. Eluned is celebrating the board's second anniversary on November 29 with a meeting in the Honey Café in Talgarth. Details from the Honeytree Bulletin Board.

Sinking feeling


Wargamers can exercise their trigger fingers with Design People Software's *Sink The Bismark*, a one player strategy game with a hint of arcade action.

The computer controls the Bismark and six U-boats and the player runs the British fleet in a simulation which is 'historically correct in detail and concept' said DPS. *Sink the Bismark* costs £10.99 on disc only. Contact Design People Software, 77 Grimwade Street, Ipswich, Suffolk, IP4 1LN.

Feature packed modem

Astracom has launched a high tech modem for a low price, claiming its AC1000 is at £167 the cheapest V21/V23 modem available in the UK.

The AC1000 offers auto-dial and auto-answer, the latest Hayes compatible command protocol and an auto-scanning mode to set itself to the correct mode for an incoming call.



Astracom's modem with buffer

It is also equipped with a Centronics printer interface with a 6k buffer, both for direct dumping of incoming and outgoing data and for

printing to a Centronics printer from the Beeb's serial port.

Communications software from Astracom supports the modem. This offers VT52, VT100, Techtronics and Prestel emulations, X-modem file transfer, printer dumps and more, for £26. Contact Astracom, 13 Beechwood Road, Uplands, Swansea, SA2 0HL.

Competition winners



Stephen Rider's Bug Runner



C Cooper's Magmalox (detail)



Wim Pontier's Kami Kaze

Let's see how you all fared in the *AU* competitions of recent months. The only result outstanding is the winner of the Great Pi competition – which is to be announced next month, along with Abuser's *I Did It* competition.

● Disney competition, June 1986: The favourite three cartoons are reproduced above and their artists all won a copy of Mirrorsoft's *Fleet Street Editor*, plus the new Disney character disc. They were: Bug Runner by Stephen Rider of Gunnersbury Park, London; Magmalox by Christopher Cooper of Eltham, London and Kami Kaze by Wim Pontier

from Vlaaridingen, Holland.

Twenty-five runners-up received a copy of *Strike Force Harrier* game (see below).

● July's competition was a toughie – but didn't prevent about 600 of you from trying. The answers were:

- 1) 210526315789473684
- 2) 152 4096 (the four-digit part of Mad Alex's phone number was 0504)
- 3) 17647059

In the three rooms all the characters were dwarves, except B in room 2. Confusion here was due to the subtle logic of propositions which carry their own truth values.


The final answer was 631,

578, 947, 424, 410, 421.

The lucky winner of the Vigen 20Mb hard disc was Vita McCourt of Alfriston, Sussex.

● August's competition featuring the domino puzzles attracted around 300 entries. There were several solutions, and each could be rotated. We liked the printout sent in by JN Pearce of Eastleigh, Hants (detail below). The 25 recipients of BBC Monitor ROMs are named below.

● September's competition attracted another large entry. As shown in the diagram below, each ram can be given its own enclosure with a tree by constructing only four fences. Five packs of Clares software were up for grabs. The pack consisted of two ROM chips, *BROM Plus* and *Macrom*, and two discs of *Fontwise Plus* and *Fontwise Editor*. The winners are named below.

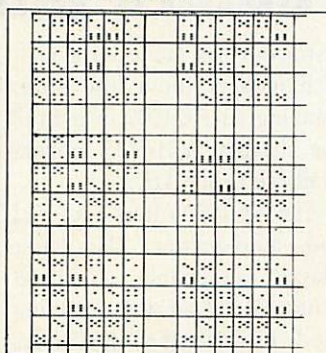

JN Pearce's puzzle (section)

Blunderbox

Oops! The following errors crept into the recent issues of *Acorn User* – hope the hair grows back quickly:

● Profuse apologies to Rod Smith who co-authored the *Super Plotter* program with Jon Baldwin – we managed to leave his name off the article. (*AU*, November, page 91). Sorry about that Rod.

The Bird listing which is mentioned towards the top of the middle column was left out. In the meantime, it has flown from the office too and so will appear in next month's *Blunderbox*. Those of you who can't wait, let us have your name and address and we'll send you a copy in advance.


● Acorn Forum, October, page 183, the C was missing from CHR\$13 in Graham Jones' scrambling Basic program. Apologies.

● In the Spider curve plotting article, October page 120, it was an E that managed to go missing from MOVE in line 880, spotted by David Garvie of Glasgow.

● Calligraphy (September): not so much an error as a useful hint, to avoid having to alter DIP switches on your printer. You can avoid having your printer churn out extra linefeeds simply by altering line 290 as follows:

290 VDU 1,13

If you are using *View* to prepare text for use with the program then save your text to disc using the WRITE command.

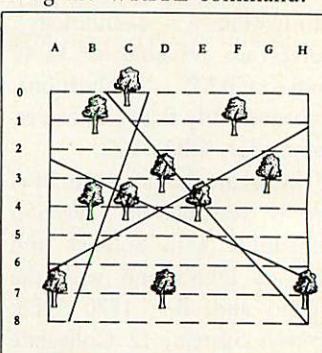

Solution to September's puzzle

June runners-up: Craig Harrison, Cleethorpes; Jane Davies, Weston Rhyn; R Young, Hemel Hempstead; CJ Longhursts, South Holland; EA Cook, Cwmbran; Wendy Shanks, Huntingdon; Robert Lowe, Headington; Pauline Crouch, Hastings; Peter Wilmott, Olney in Bucks; Ben Still, Bushey Heath; Carl Radley, Plymouth; Julian Nicholson, Powys; Nich Jasen, Swindon; Andrew Taylor, Barnsley; Martin Jones, Sidcup; Andrew McIntyre, East Lothian; Paul Bryant, Bristol; Clare Roberts, Wirral; K Fenwick, Newcastle-Upon-Tyne; Irfan Chaudhry, Ilford; Adam Streeting, Maidstone; Richard Griffiths, Rochdale; Lee Foster, South Shields; Alison Holgate, Beaconsfield and Hannah Datson, Stourport on Seven.

August winners: JN Pearce, Eastleigh; R Bates, Burntwood; PS Evans, West Glamorgan; CM Leversuch-Roberts, Tewkesbury; DB Ramsden, Grimsby; M Bidulph, Redland; CG Caine, Isle of Man; A Bryon, Nottingham; S Hancock, Milton Keynes; KJ Clarke, Poole; HJ Lockett, Preston; D Toyer, Luton; M Farrell, Nottingham; FS Dewhurst, Keighley; RS Condrey, Western-S-Mare; AW Sadd, Solihul; PJ Derlien, Sheffield; EM John, Portishead; D Couch, Dagenham; M Young, Worthing; Hans CHR Davidsen, Denmark; M Simpson, Peterborough; I Mackenzie, Edinburgh; P Smith, Melton Mowbray and K Smith, Milton Keynes.

September winners: R Westgate, Exeter; LB Benson, Marple, Cheshire; P Henley, Southampton; N Bond, Whitley Bay and G Crowder, Edinburgh.


BEEBUG



BRITAIN'S LARGEST INDEPENDENT
COMPUTER USER GROUP

FOR THE BBC MICRO & MASTER SERIES


**3 GOOD REASONS TO
JOIN BEEBUG NOW!**

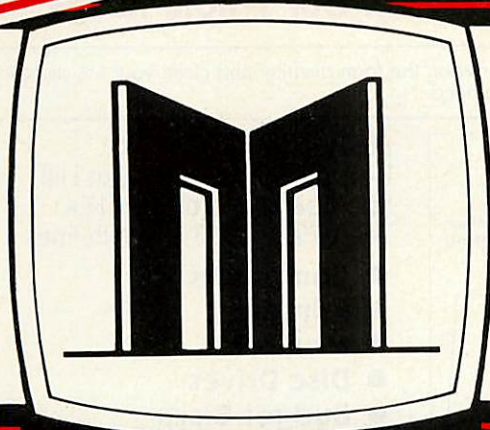

1

Regular Magazine Mailed FREE to members


Informative articles for beginner and expert, Workshops, Reviews, News, Hints & Tips; Programs such as Personal Diary Manager, Phone Book, Page Designer, Animation, Windows and Icons, Business Graphics etc (also on cassette and disc). All to help you make the most of your micro.

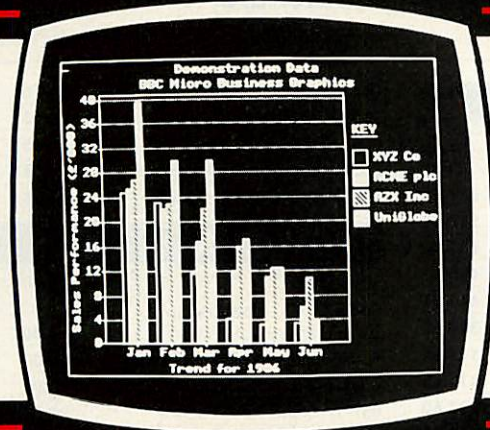

2

Substantial Discounts for BEEBUG members

25% Discount on BEEBUG's own range of professional software (Masterfile, Quickcalc, Design, Studio Eight for example). 5% Discount on all other computer products (computers, disc drives, printers, software, accessories etc) through our own showroom and by mail-order.

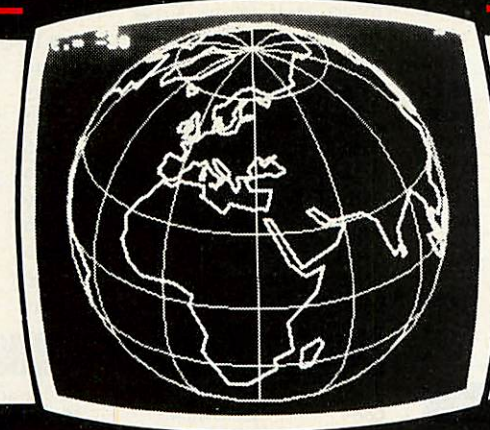

3

Services for BEEBUG members

Comprehensive Technical Support to answer your queries regarding the use of your system; Free Members' ads; Trade-in Scheme on your old BBC micro when upgrading to Master or Compact; Secondhand Beeps with three months warranty; Insurance and Repairs; and much more.



I would like to enrol as a member of BEEBUG for 1 year and receive the next 10 issues of BEEBUG magazine.

*SUBSCRIPTION RATES

UK, Eire and BFPOs	£12.90
Rest of Europe	£19.00
Middle East	£22.00
America & Africa	£24.00
Elsewhere	£26.00

All payments MUST be in pounds sterling. Cheques MUST be drawn on a UK bank.

SURNAME _____ INITIALS _____ TITLE _____

ADDRESS _____

POSTCODE _____

SIGNATURE _____

I enclose £ _____ (enter correct amount*) OR
Please debit my Access/Visa Account £ _____

EITHER Post today to BEEBUG,
Dolphin Place, Holywell Hill, St. Albans, Herts, AL1 1EX
OR Phone St. Albans (0727) 40303

FOR A FREE BEEBUG
INFORMATION PACK
PHONE 0727 40303

Card Number

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Card Expiry Date

____/____

DEPT AU12


BEEBUG SHOWROOM AND MAIL ORDER

The products in this price list are available in our showroom in St. Albans and by mail order. Telephone your order on 0727 40303 or send the order form to the address below. Alternatively come along and see us. We are open 9 - 5.30 Mon - Sat, and there is ample parking at the rear at our premises.

**5%
DISCOUNT**

CHECK OUR NEW PRICES
**Beebug Members May Claim 5%
Discount On Our Whole Range**

If you are not yet a member, join now on the form overleaf and claim your 5% discount on the hardware/software that you need.

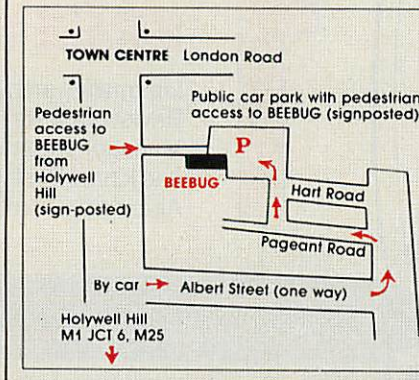

BEEBUG MAIL ORDER
Dolphin Place, Holywell Hill,
St. Albans, Herts AL1 1EX
Tel: 0727 40303 — Multi-lines

- Computers
- Printers
- Monitors
- Disc Drives
- Budget Discs
- Software

ALL OUR PRICES INCLUDE VAT

COMPUTERS

Code	Description	Price	Mem Price
0196G	Compact + Col. Monitor	688.85	654.40
0197G	Compact + Mono Monitor	539.35	512.38
0198G	Compact TV System	458.85	435.90
0199G	Compact Entry System	442.75	420.61
0200G	Master 128	489.00	464.55
0202G	Master ET	368.00	349.60
0230C	65C102 6502 "Turbo"	119.00	113.05
0231D	80186 Co-Proc	395.00	375.25
0232D	32016 Co-Proc	1288.00	1223.60
0234B	M128 Econet Module	48.87	46.43
0235B	M128 Eprom Cartridge	15.18	14.42
0240C	M128 Manual 1 ADJ22	14.95	14.20
0241C	M128 Manual 2 ADJ23	14.95	14.20
0242C	M128 Adv Ref Manual	19.00	18.05
0203F	'6502' 2nd Processor	207.00	196.65
0204F	'280' 2nd Processor	335.80	319.01
0205F	Acorn, Prestel Adapt	138.00	131.10
0206F	Acorn Teletext Adapt	148.35	140.93
0237F	Acorn IEEE Interface	392.00	305.90
0217B	1770 Disc Interface	49.39	46.92
0218A	ADFS Upgrade 1770	29.33	27.86
0209A	1.2 DNFS Rom	19.78	18.79
0207A	Basic II Rom	21.85	20.76
0208A	1.2 Operating System	6.90	6.55

DISC DRIVES

Code	Description	Price	Mem Price
0600F	Cumana CSX100 40T	106.95	101.60
0610F	Cumana CS100 40T	126.50	120.18
0601G	Cumana CDX200 40T	215.00	204.25
0602F	Cumana CSX400 40/80T	142.60	135.47
0603F	Cumana CS400 40/80T	162.15	154.04
0604G	Cumana CD800S 40/80T	286.35	272.03
0614F	Cumana CS100E	118.45	112.53
0615F	Cumana CS400E	155.00	147.25
0222F	Disc Starter Pack	163.00	154.85
0611A	Cumana Disk Guide	1.90	1.80
0650B	Memorex DiscsSDDD 40	15.50	14.73

0651B	Memorex DiscsSDDD 80	25.50	24.22
0652A	Memorex Disc Cleaner	9.65	9.17
0653A	Disc Case 10 discs	2.25	2.14
0654C	Disc Box - up to 50	11.99	11.39
0656D	Lockable Disc Box 85	17.25	16.39

MONITORS

Code	Description	Price	Mem Price
0501H	Kaga KX1203 Monitor	116.00	110.20
0502H	Kaga KX1202 Monitor	116.00	110.20
0556A	Taxan 1201/2/3 BNC	3.90	3.70
0571D	Stand for KX Series	29.00	27.55
0503G	Zenith 123 12" Green	83.00	78.85
0504G	Zenith 122 12" Amber	87.00	82.65
0530H	Microvitec 1431 Mon.	212.75	202.11
0531H	Microvitec 1451 Mon.	269.10	255.65
0550A	1.0m Mon. Lead RGB	5.75	5.46
0535H	Supervision III RGB	379.50	360.52
0536H	Supervision II RGB	318.55	302.62
0555A	Supervision Mon. Lead	7.00	6.65
0570D	Stand for Supervision	29.00	27.55
0551E	Single Master Plinth	16.10	15.30
0552E	Single Plinth	12.65	12.02
0553F	Double Plinth	23.00	21.85
0554A	Memorex VDU Cleaner	4.65	4.41

PRINTERS

Code	Description	Price	Mem Price
0999G	Panasonic KX-P1080	170.20	161.69
0311G	Kaga KP 810	251.85	239.26
0316G	Taxan KP910 15"	410.37	389.85
0319G	Epson FX85 NLQ	368.00	349.60
0320D	FX85 Tractor Feed	32.20	30.59
0321D	FX85 Sheet Feeder	130.00	123.50
0300G	Brother HR15XL Para	350.75	333.21
0301G	Brother HR15XL Ser.	350.75	333.21
0310G	Juki 6100 Daisywheel	362.25	344.14
0309F	Ibico LTR1 NLQ	105.16	99.90
0303G	Canon PJ1080A col.	520.00	494.00
0308G	Epson JX 80 colour	520.00	494.00
0318G	Epson HI 80 Plotter	368.00	349.60

0400A	Platten Cleaner Kit	6.44	6.12
0401A	2M Printer Lead	8.00	7.60
0402A	Epson FX/RX80 Ribbon	4.00	3.80
0403A	Epson FX/RX100 Ribbon	5.00	4.75
0408A	Canon/Taxan Ribbon	5.63	5.35
0409A	Black Cart PJ1080A	7.19	6.83
0410A	Colour Cart PJ1080A	9.99	9.49
0413A	LX 80 Ribbon	4.60	4.37
0414A	Ibico Ink Roller	4.60	4.37
0415A	Epson JX80 Ribbon	16.22	15.40
0418A	Juki 6100 S/S Ribbon	1.55	1.47
0406D	11" *9.5" Paper 2000	14.03	13.33
0453G	2-part NCR Paper	23.00	21.85
0407C	3.5" *1 7/16" Labels	5.63	5.35
0416A	Dust Cover KP810	5.45	5.18

AMX MOUSE

Code	Description	Price	Mem Price
0703B	AMX Mouse	74.75	71.01
1150B	AMX Desk Disc	19.00	18.05
1151B	AMX 3D Zicon Disc	19.00	18.05
1152B	AMX Database Disc	19.00	18.05
1153B	AMX XAM	19.00	18.05
1154C	AMX Pagemaker Plus	40.00	38.00
1155B	AMX Superant Rom	40.00	38.00
1156B	AMX Paint Pot Disc	10.99	10.44
1157C	AMX Mind Games Disc	14.50	13.78
1158A	AMX Zap Zone Cass	4.90	4.65
1160B	AMX Utilities	10.99	10.44

WATFORD HARDWARE

Code	Description	Price	Mem Price
0213A	Watford DFS Rom + Man	27.48	26.11
0214B	Watford DDFS Kit	56.35	53.53
0216A	Watford DFS Manual	6.95	6.60
0219B	Watford 1.43 DFS Kit	62.10	59.00
0702A	Watford 32K RAM Card	67.28	63.91
0709D	Watford Eeprom Eraser	33.35	31.68

0717A	Watford Sideways ZIF	17.83	16.93
0736A	Watford 12 Rom Board	36.80	34.96
0737A	Watford Battery	4.37	4.15
0750B	Watford S/State 16K	32.20	30.59
0751B	Watford 16K Module	30.59	21.85
0752B	Watford Diagnostic	23.00	21.85
0753B	Rom/Ram Board 64K	67.85	64.46
0754B	Rom/Ram Board 128K	102.35	97.23
0755A	Write Protect Mk12	2.76	2.62
1120B	Watford TD Rom (SD)	28.75	27.31
1121B	Watford TD Rom (DD)	28.75	27.31

OTHER HARDWARE

Code	Description	Price	Mem Price
0701A	Aries B32 RAM Card	93.15	88.49
0704A	ATPL ROM Board BBC	39.67	37.69
0735A	ATPL Battery Backboard	17.37	16.50
0740B	Aries B12 Rom Board	46.00	43.70
0749A	Aries B12C Adaptor	5.87	5.57
0705A	2764 8K Eprom	2.64	2.51
0706A	27128 16K Eprom	3.33	3.17
0707A	6264 8K Ram	3.68	3.50
0708A	Eprom Extractor Tool	3.45	3.28
0710B	Spotlife Rom Blower	75.90	72.11
0713A	Phone 2 in 1 Adaptor	6.30	5.99
0714A	BBkey Lables	2.09	1.99
0715A	Dust Cover BBC B/B+	3.45	3.28
0734A	Dust Cover Master	4.60	4.37
0716F	Music 500	86.32	82.00
0718B	Voltmace 3B Single	9.99	9.49
0719B	Voltmace 3B Twin	17.00	16.15
0720B	Voltmace Delta 14B	12.50	11.88
0721B	Voltmace Delta 14B/1	13.00	12.35
0762E	Beebug Magic Modem	95.00	90.25
0763E	Beebug Modem + S'ware	109.00	103.55
0810D	BBC Keyboard	52.90	50.25
0811A	Video ULA Chip	17.25	16.39
0812A	A to D D7002C Chip	5.29	5.03
0814A	Keyboard Connector	5.75	5.46

0815A	65C02 CPU	13.80	13.11
-------	-----------	-------	-------

ACORN SOFTWARE

Code	Description	Price	Mem Price
1000B	Acornsoft View	44.28	42.06
1022C	View 3.0 Rom	66.70	63.36
1002B	Acornsoft Hi-View	44.28	42.06
1013B	View Print/Drive T.	8.62	8.19
1014B	View Print/Drive Disc	9.77	9.29
1043B	Acorn Viewspell Rom	34.02	32.32
1021A	Acorn Viewindex Disc	14.37	13.66
1019B	Acorns Viewstore Rom	44.28	42.06
1030B	Acornsoft ViewPlot	25.30	24.03
1001B	Acornsoft View Sheet	44.28	42.06
0243A	Master Lisp C.ROM	59.69	56.70
1003A	Acornsoft Lisp Rom	41.40	39.33
1025B	Acornsoft Lisp Cass	10.35	9.83
1041B	Acornsoft Forth Rom	38.53	36.60
1042B	Acornsoft Forth Disc	19.00	18.05
1027C	Micro PROLOG	74.75	71.01
1033B	Microtext Disc	55.20	52.44
1034C	Microtext Plus Rom	240.00	228.00
1035B	6502 Dev. Pack	45.00	42.75
1004B	Acornsoft BCPL	50.03	47.52
1026B	BCPL Generator	43.57	41.39
1005B	Acornsoft Comal	41.97	39.88
1006B	Acornsoft Logo	50.71	48.18
0244A	Master PASCAL C.ROM	67.85	64.46
1007C	Acornsoft ISO Pascal	50.71	48.18
1028B	Pascal Generator	32.78	31.14
1031B	Acorn Termulator Rom	31.05	29.50
1008B	Acornsoft Basic Ed	28.00	26.60
1040C	Micros Business Disc	47.27	44.90
1037B	Database Cassette	11.50	10.93
1038B	Database Disc	14.50	13.78
1017B	Acornsoft GXR B	25.43	24.16
1018B	Acornsoft GXR B+	25.43	24.16
1039B	Creative Sound Disc	19.00	18.05

Trade in your Beeb for a Master 128 or Compact



One of the services that we are now able to offer to Beebug members is the opportunity to trade in your BBC Micro towards the purchase of a new Master.

Depending upon the age of your computer, we will allow a trade-in discount of up to £225 off the price of a new BBC Master 128 or Compact computer. This would bring the purchase price of a Master 128 down from £464.55 to £239.55.

The discounts are as follows:

BBC Micro issue 4 or older without DFS £125

BBC Micro issue 7 or newer without DFS £175

BBC Micro issue 4 or older with DFS £175

BBC Micro issue 7 or newer with DFS £225

By DFS we mean an Acorn or Watford single density DFS. Computers must obviously be in good working condition to qualify for this offer.

If you wish to take advantage of this service please write to us or telephone the number below. Do not just send your machine, as we are only able to accept orders subject to availability.

If you are not yet a member please phone and ask for an application form.

Second Hand BBC Micros For Sale

As a result of this service we will also be able to offer a number of second hand BBC Micros for sale.

Machines are thoroughly serviced and offered for sale with 3 months guarantee, from £180 upwards. Please write or phone to discuss your requirements.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans, Herts, AL1 1EX
Telephone: 0727 40303


Dynamic Discs from Beebug

Our range of top quality 5 1/4" blank discs for the BBC Micro and Master 128 are now available at unbeatable prices.

These discs are from the UK's leading disc manufacturer, individually tested and guaranteed for life. They are specially produced and boxed for Beebug. Don't settle for anything less than the best.

Beebug members may claim a 5% discount on the price. If you are not yet a member please phone for an application form.

NEW LOW PRICES!

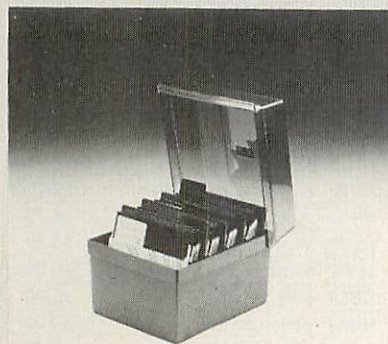


48 TPI DOUBLE DENSITY

		Price	Members Price			Price	Members Price
10	S/S	£9.90	£9.40	10	D/S	£10.42	£9.90
25	S/S	£23.00	£21.85	25	D/S	£26.47	£25.15
50	S/S	£48.00	£45.60	50	D/S	£50.00	£47.50

ALL PRICES INCLUDE VAT AND STORAGE BOX

UK Carriage.

Please add £1.00 for 10 and £3.75 for 25 or 50

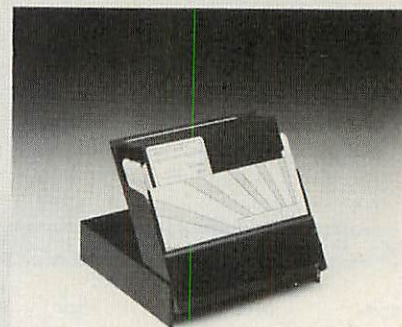

96 TPI QUAD DENSITY

		Price	Members Price			Price	Members Price
10	S/S	£10.42	£9.90	10	D/S	£10.90	10.35
25	S/S	£26.47	£25.15	25	D/S	£29.00	£27.55
50	S/S	£50.00	£47.50	50	D/S	£53.00	£50.35

1015B	Acornsoft Revs Disc	17.08	16.22
1029A	Revs 4 Tracks Disc	11.95	11.35
1024B	Acornsoft Revs Cass	14.00	13.30
1032B	Revs 4 Tracks Tape	9.32	8.85
1016B	Acorn Aviator Disc	17.08	16.22
1044B	Acorn Aviator Cass	14.00	13.30

COMPUTER CONCEPTS

Code	Description	Price	Mem Price
1100C	Wordwise Plus	46.00	43.70
1101A	WW+ Progbook & Disc	20.00	19.00
1102A	Wordwise	28.75	27.31
1103B	C.C. Graphics ROM	24.73	23.49
1104B	Printmaster (Epson)	28.00	26.60
1105B	Printmaster (Star)	28.00	26.60

1106B	Accelerator	56.01	53.20
1107B	Speech ROM	28.00	26.60
1109B	Disc Doctor	27.00	25.65
1110B	Intersheet	44.85	42.61
1111A	Hi Intersheet Disc	5.75	5.46
1112A	Hi Wordwise+ Disc	5.75	5.46
1113B	Caretaker Rom	28.75	27.31
1114B	Interchart	29.90	28.41
1115B	Speech System TTS	30.99	29.44
1116B	Interbase	67.85	64.46
1117B	Interword	50.03	47.52

OTHER SOFTWARE

Code	Description	Price	Mem Price
1123A	SPEECH! Disc 40/80T	11.95	11.35

1124A	Citadel 40/80	11.95	11.35
1125A	White Knight Disc	18.63	17.70
1126B	White Knight Cass	9.89	9.40
1127A	White Knight 1770	18.63	17.70
1128B	Movie Maker	20.95	19.91
1129A	THRUST	11.95	11.35
1130A	REPTON2	11.95	11.35
1170D	Fleet Street 40T	37.95	36.05
1171D	Fleet Street 80T	37.95	36.05
1172A	Mini Office II Cass	14.50	13.78
1173A	Mini Office II 40T	16.50	15.68
1174A	Mini Office II 80T	16.50	15.68
1175A	Clares Replica II	15.00	14.25
1011B	BBCsoft UltraCalc 2	70.00	66.50

ALL PRICES INCLUDE VAT ORDER FORM

Beebug Mail Order, Dolphin Place, Holywell Hill, St. Albans, Herts. AL1 1EX
0727 40303

To claim members 5% discount please quote membership no. or add £12.90 for 1 years subscription (UK).

CODE	QUANTITY	DESCRIPTION	UNIT PRICE	TOTAL
NAME:			SUB TOTAL	£
ADDRESS:			CARRIAGE	£
			TOTAL	£
POSTCODE:				
ACCESS/BARCLAYCARD NO:				

In accordance with our competitive pricing structure prices are subject to alteration at any time.

CARRIAGE

Carriage is denoted by the letter contained in the stockcode, A-50p, B-£1, C-£2, D-£3, E-£3.75, F-£5.50, G-£7.

When ordering several items, use the highest price code plus half of each subsequent code, up to a maximum of £7. For courier delivery use code G.

Overseas customers please follow the above instructions. The VAT covers the extra postage and insurance.

BFPO customers deduct VAT from the goods purchased and add above postage.

EVERY WILD IMAGINATION NEEDS A LITTLE SELF CONTROL.



As a BBC Micro user, you enjoy some pretty sophisticated equipment.

So it's a pity if you are still missing that sophisticated, positive control your equipment deserves.

There's not much joy in a joystick, and keyboards can be all fingers and thumbs. Frustrating, especially when your imagination is much faster than your fingers!

What you need is an AMX Mouse.

Already thousands of BBC Micro users have adopted an AMX Mouse and wouldn't be without it.

We didn't claim it was 'the best input device'. The press said it for us.

In fact it has received outstanding critical acclaim, and no wonder!

The AMX Mouse brings to BBC Model B, B+ and Master 128 users, the same freedom and versatility which has, up to now, been the exclusive province of much more expensive computers.

In fact, it's no surprise that nearly all the new 16 bit 'State of the Art' computers now come with a mouse as standard. Proof, if proof were needed, that the Mouse is here to stay.

The AMS range of Mouse software includes, AMX Art, AMX Utilities, AMX Pagemaker, AMX Super Art/Rom, AMX Paintpot, AMX Desk, AMX Data Base, AMX 3D Zicon, AMX XAM.

There is also a growing list of programs available from other leading software houses, which utilize the Mouse, including, Colour Art from Watford, Mini Office II from Database, Novocad from Technomatic, Icon Master from Beebug, Compas Starter CAD system from British Thornton, CAD Soft from CAD Soft, Solidesk from Solidisk, and Mode 7 Art from Tubelink and of course View and Wordwise are also compatible, many more titles will be available soon.

Now there are three great ways for you to get into a perfect Mouse Environment!

AMX Super Art & Super Rom (Mouse, Keyboard & Joystick compatible) £49.95.

AMX Mouse plus AMX Art/Rom £69.95.

TUBELINK on Prestel page *2582182 # supports the AMX Mouse and ALL AMS software.

AMX Mouse plus AMX Super Art/Rom £89.95.

Both AMX Art in mono and Super Art in colour are ideal for true Epson compatible printers and AMX Super Art is also compatible with Integrex and Okimate colour printers.

Isn't it about time you trapped an AMX Mouse?

These superb packages are available from all good computer dealers or direct, using the FREEPOST order form below.



—BBC MASTER 128—
ALSO AVAILABLE FOR MICRO MODEL B and B+

☎ FOR INSTANT ACCESS/VISA ORDERS TELEPHONE (0925) 413501/2/3

PLEASE RUSH ME **POST FREE** THE FOLLOWING AMX BBC PACKAGES.

Quantity ☐ PLEASE TICK IF MASTER VERSION IS REQUIRED.

_____ AMX SUPER ART & SUPER ROM @ £49.95 EACH, INCL. VAT & P&P

_____ AMX MOUSE & AMX ART & ROM @ £69.95 EACH, INCL. VAT & P&P

_____ AMX MOUSE & AMX SUPER ART ROM @ £89.95 EACH, INCL. VAT & P&P

I ENCLOSE CHEQUE/POSTAL ORDER FOR £ _____

OR DEBIT MY ACCESS ☐ OR VISA ☐ (tick as appropriate)

CARD No. _____

EXPIRY DATE _____

SIGNATURE _____

NAME (Block Capitals Please) _____

ADDRESS _____

POSTCODE _____

☐ PLEASE SEND ME FURTHER DETAILED INFORMATION ON THE AMS RANGE OF PRODUCTS (Tick if appropriate)

AMX MOUSE

IMAGINATION AT YOUR FINGERTIPS

SEND TO: ADVANCED MEMORY SYSTEMS LTD., FREEPOST, WARRINGTON WA4 1BR.

ADVANCED MEMORY SYSTEMS LTD · 166/170 WILDERSPOOL CAUSEWAY · WARRINGTON WA4 6QA · TELEX: 628672 AMS G

TWILLSTAR COMPUTERS LTD

FREE CATALOGUE and full price list. Call now for your issue.

Computers

MASTER 128

Complete With Internal Software	£454.25
Master Turbo Upgrade	£113.95
Master Econet Module	£46.00
Master ET	£373.75
Master 512 Upgrade	£389.00
Master SC Upgrade	T.B.A.
Eprom Cartridge	£14.95
Reference Manual Part 1	£14.95
Reference Manual Part 2	£14.95
6502 Second Processor	£179.00
Z80 Second Processor	£379.00
Acorn Prestel Adaptor	£125.00
Acorn Teletext Receiver	£135.00
Winchester Disk Drive 10 MBYTES	£1250.00
Winchester Disk Drive 30 MBYTES	£1850.00
IEEE Interface	£299.00
Music 500	£178.00

ECONET ACCESSORIES

100m Cable	£89.00
Station Lead Set	£29.00
Econet Starter Kit	£99.00
Econet Bridge	£199.00
Level 1 Fileserver 40 Track	£99.00
Level 2 Fileserver 80 Track	£235.00
Print Server Eprom	£49.00


BBC Upgrades

64K Upgrade Kit	£39.95
1770 Upgrade Kit	£49.94
ADFS ROM	£29.95
Disc Upgrade Kit	£89.00
Econet Upgrade Kit	£49.00
Speech Upgrade Kit	£49.00
DNFS ROM	£20.00

Monitors

MONOCHROME MONITORS

Philips BM 7502 Green Screen	£79.00
Philips BM 7522 Amber Screen	£79.00
Kaga KX 1202G Hi Res Green	£95.00
Kaga KX 1203G Ultra Hi Res Amber	£120.00
	£120.00



Hantarex Hx 12 Dark Gloss Screen high resolution monochrome monitor 12" Composite Video & Audio Input £75.00

COLOUR MONITORS

Microvitec 1431 Std Res	£201.25
Microvitec 1451 Med Res	£270.25
Microvitec 1441 Hi Res	£391.00
Microvitec 2030 Cs 20 Std Res	£425.50
Microvitec 1431 AP Std Res	£224.25
Microvitec 1451 Ap Med Res	£293.25

OUTSTANDING PERFORMANCE OUTSTANDING VALUE

Just released by Hantarex 14" Colour Monitor Standard Resolution RGB PAL Audio Input (Inc. VAT) £175.00

SPECIAL OFFER

Mitsubishi 1404 Medium Resolution Monitor with 640 X 200 Pixels RGB available with IBM or BBC Leads. £229.00

TV MONITORS

Philips 1114 colour TV/monitor with 14" tube offering 10 Preselect channels RF CVBS and RGB inputs £199.00

SWIVEL BASE

Tilt and swivel base for 12" or 14" monitor or TV. "Looks very elegant" £17.25



PHILIPS MONITOR TO TV CONVERTER

Converts any make of standard monitor to TV £69.00

TCL WORD PROCESSING SPECIAL PACKAGE

PACKAGE 1

Based on Master 128. The TCL All in One Word Processing Package contains a Master 128, View 3.0, Viewsheet, High Res Green Monitor, 800K Dual Drives with PSU, Quendata Daisy Wheel Printer together with a box of Discs, Paper, and all the Cables. £914.25

PACKAGE 2

Based on Master Compact 128. The TCL package includes Compact 128, latest version of the View Word processor, single 640K disk drive, monochrome monitor, correspondence quality printer. All connecting cables for above and also 5 disks and some paper. £635.00

visit our
NEW SHOWROOM
Open 9am-6pm Mon-Sat
OPEN SUNDAYS
10-2



YOUR ONE STOP MEGA-COMPUSTORE FOR



BBC MASTER COMPACT

Twillstar proudly presents MASTER COMPACT for your Home Education and Business needs! Complete with bundled software and an integral 3.5" Disk Drive in the following Systems:-

SYSTEM 1

(inc. VAT) £458.85

128K *Single 640K Drive* *UHF Modulator* *Bundled Software*

SYSTEM 2

(inc. VAT) £539.35

As System 1. With *12" High Res. Monochrome Monitor*

SYSTEM 3

(inc. VAT) £688.85

As System 1. With *14" Medium Res. RGB Monitor*

SPECIFICATIONS:

* Compatible with Master Series micro subset *

* 128K RAM inc 64K sideways RAM *

* 64K ROM inc 32K MOS, 16K BASIC *

* Up to 4 internal ROM sockets *

* 3.5" 640K formatted disk drive *

* Mouse or Joystick * Disk drive *

(optional) Econet * Serial * 5V power from disk drive module *

Usual 8 BBC display modes inc. Mode 7 *BUNDLED SOFTWARE:

Pull down menus * Desk top inc. note pad, calculator * VIEW 3.0 *

CARD INDEX * Full LOGO * BBC BASIC 4.0 * ADFS * Utis * Welcome suite * Tutorials * (1770 DFS under licence)

2nd DRIVE KIT

MASTER COMPACT OFFER £113.00

A free box of 3 1/2" disks worth £30.00 with every BBC Master Compact System purchased.

Philips CM 8533 Med Res monitor with dark glass etched screen composite video input RGB and Audio Input. £289.00

Taxan Super Vision II



High Resolution colour monitor with several unique features, at an affordable price.

SUPERVISION II
12" RGB High resolution colour monitor. Fully compatible with IBM, Apple, BBC and most other Personal Computers. 635 x 312 line resolution. Positive or negative sync input. Text colour switchable to green, amber, white or blue or inverse white. Super high contrast tube. Optional tilt-swivel base (with clock/calendar available). Special introductory offer. £299.00

We are unable to list all the products that we stock—Please call for further details or visit our **NEW SHOWROOM**


Disc Drives SOURCE The Complete Solution

SD 400A	£114.00
Single 400K 40/80 Track. Double Sided, Double Density.	
SD 800C	£219.00
Dual 800K 40/80 Track. Double Sided, Double Density.	
SD 400B	£128.00
Single 400K 40/80 Track. Double Sided, Double Density & PSU	
SD 800E	£245.00
Dual 800K 40/80 Track. Double Sided, Double Density & PSU	
SD 800F	£239.00
Dual 800K 40/80 Track. Double Sided, Double Density in Dual Plinth	
SD 800E	£259.00
Dual 800K 40/80 Track. Double Sided, Double Density & PSU & Dual Plinth	

NEW Mitsubishi Disc Drives

3 YEAR WARRANTY

Source Drives are 100% BBC compatible. Slimline disc drives manufactured to the highest standards. Complete with formatting disc manual and cables.



Printer Accessories

SERIAL INTERFACES

EPSON 8143	£34.00
JUKI	£58.00
CANON	£91.00
KAGA	£85.00
Epson 8148 + 2K buffer	£65.00

LISTING PAPER

11" x 9 1/2" 2000 Sheets	£14.00
1000 Sheets	£7.00
500 Sheets	£3.50
Teletypewriter Roll (Telex size)	£4.50
Teletypewriter Roll Holder	£14.00
Printer Roll 5" x 2 1/2"	£2.00

PRINTER LABELS

1000 90 x 36mm 1 across	£5.70
2000 90 x 36mm 2 across	£12.00

PRINT FEED SYSTEM

Revolutionary low cost Printer Feed System ties up all Micro Desks—No more paper on the floor.

80 Col	£35.00
132 Col	£55.00

RIBBONS

Full selection of Ribbons available. Call for latest prices.

PRINTER SHARERS

Printer Sharer (2 to 1)	£39.00
Printer Sharer (6 to 1)	£79.00

EXTERNAL SWITCHES


Spectrum parallel interface	£40.25
OL Serial/parallel interface	£27.60
CBM 64 parallel interface	£19.95

COMPUTER CABLES

Call for full listing of our vast stock.

KX-P 1080 DOT MATRIX PRINTER

- NEAR-LETTER QUALITY PRINTING IN ALL PITCHES
- OPERATOR ACCESSIBLE PRINT MODE SELECTOR (Std./Pg.m., NLQ, Comp.)
- FRICTION FEED AND ADJUSTABLE TRACTOR ARE STANDARD
- WORD PROCESSING FUNCTIONS (Justification, Centering, L&R alignment)
- PROPORTIONAL SPACE PRINTING
- HIGH RESOLUTION, DOT-ADDRESSABLE GRAPHICS
- UP TO 40 DOWNLOADABLE CHARACTERS
- COMMAND CODE COMPATIBLE WITH POPULAR PRINTER SOFTWARE
- PRINT SPEED, DRAFT: 100 NLQ: 20 COMPRESSED: 86
- 9 PIN PRINT HEAD




The Panasonic KX-P 1080 impact dot matrix printer is ideal for applications that require economical high quality printing. It offers a variety of print modes, all producing crisp clearly formed characters. Wide choice of print sizes includes semi-compressed and compressed (even in near-letter quality printing). Operator accessible print mode selector adds convenience. For a reliable printer at an affordable price, the KX-P 1080 is always a smart choice.

£159.00

Printers

CITIZEN MSP10

The new MSP10 with 160 CPS Draft and 40 CPS NLQ. With TWO years Warranty **£269.00**




NEW

STAR NL-10

Fine Near-Letter-Quality, 100% compatibility and total reliability all in one easy to use printer. For quality, ease of operation and dependability, nothing beats the Star NL-10. You get outstanding print quality at 120 cps in draft mode and 30 cps in near letter quality. Plus, the sleek NL-10 offers full compatibility with most popular computers through plug in interface cartridges. Just insert the appropriate plug in interface cartridge for your IBM-PC, Commodore, Apple IIc or other parallel computer and your Star NL-10 is ready to print. Touch a button on the control panel to set the print pitch (3 choices), to select the typeface and to print in either draft or NLQ mode. You can even set left and right margins, make top of form settings and control forward and reverse feed in the smallest pitch.

£229.00



EPSON LX86

High performance low on price offering an increased performance at an incredible low price. The LX 86 Dot Matrix Printer represents unprecedented value for money, with a host of built in features, increased draft speed 120 cps and correspondence quality at 16 cps printing this versatile Epson printer carries out every task with effortless style and has the highest standard of reliability. Supports both Epson and IBM character set. (inc VAT) **£229.00**


ALSO AVAILABLE

Epson FX 86	£365.00
Epson FX 105	£495.00
Seikosha GP 50A (Parallel)	£69.00
Seikosha GP 50S inc.	
Printer I/F - cables	£69.00
Canon PW 1080A (NLQ)	£249.00
Canon PW 1156A	£379.00
Canon PW 1156A	£228.00
Brother EP 44	£189.00
Shinwa CP 80A	£240.00
MP 165	

SOURCE

The Complete Solution

INTRODUCES THE NEW TECO VP1814



Dot matrix printer. VP1814 is fast highly reliable and easy to operate.

- ★ Standard 80 column
- ★ The high-speed, low energy consumption 9 wire dot head gives printing speed of 189 cps and NLQ speed 36 cps
- ★ Bi-directional, Logic seeking in text mode
- ★ The use of fan-fold, roll or cut-sheet paper is possible with adjustable sprocket pin feed and friction feed
- ★ Offers emphasized, double print, super script, sub script
- ★ Justified print mode are also available including left, centre, right and full justification
- ★ 9 graphic modes are available
- ★ Both download and inprint buffer can exist simultaneously
- ★ 7K input buffer standard can be expanded to 15K
- ★ Printing modes selectable at front panel (NLQ/draft, Pica/Elite, enlarge, emphasize, condense, italic)
- ★ 11 Language international character font is internalized
- ★ Both IBM and Epson compatible

MAIN UK DISTRIBUTOR
SPECIAL INTRODUCTORY PRICE
(inc. VAT) **£229.00**

HOME, EDUCATION & BUSINESS NEEDS!

DOT MATRIX PRINTERS

Juki 5510 - Gives you 180 CPS & NLQ Standards

£269.00 Inc. VAT

...and thats not all! The Juki 5510 also has full graphics mode, two position 'dip-switch' (providing instant compatibility with both the Epson and the IBM Graphic Printer). Standard 2K memory (expandable to 14K) built-in Parallel Centronics interface and 8-switch international character sets. If you need colour too, the optional Juki 5510 Colour Kit gives you seven colours.

£112.00



CITIZEN 120D

Dot Matrix Printer. The 120D precision printer brings to the small business, educational and home user good quality and attention to detail. Its compact size, host of standard features and built in quality and reliability that supports Citizen's unique full TWO-YEAR warranty make it a must for all computer users. Fast draft output: 120 cps. Built-in NLQ: 25 cps. IBM and Epson compatible. Plug-in interface cartridge. Tractor and friction feed as standard. Optional cut sheet feeder.

£159.00

BROTHER M1109 NLQ

Printer 100cps Directional Logic Seeking Friction feed and secondary optional tractor feed **£189.00**



KAGA KP810

The 80 column printer with 140 CPS Draft and NLQ with friction and built in tractor feed offering 9 INT character sets. Long life cartridge ribbon and standard centronics interface. Fully compatible with Epson FX80. Designed and made by Canon. The office people.

£239.00

KP 910

Same specifications as above. 17" wide carriage 156 column. Special limited offer **£379.00**

EPSON LQ800


24 Pin Dot Matrix Printer offers a high 200 CPS draft speed and near letter quality at 67 CPS with high resolution graphics and a variety of fonts **£585.00**

ALL ITEMS LISTED
INCLUDE VAT AT 15%
'NO HIDDEN EXTRAS'

DAISYWHEEL PRINTERS

QUENDATA DWP 1120 with optional tractor/sheet feeder and 13" paper width facility. This Daisywheel printer with 20 CPS has 96 character printwheel compatible with the QUME. Standard centronics interface.

(optional RS232 C)	£169.00
Juki 6100	£285.00
Juki 2200	£275.00
Juki 6300	£799.00



PANASONIC KX-P3131

A Fully Formed Serial Impact Daisywheel printer with print speed of 17cps. Diablo compatible print wheels. Print pitches available are: 10, 12, 15 and proportional spacing. Standard friction feed and optional tractor. Paper width 13.5 inches. Standard Centronics optional RS-232C. Built with 6K text buffer expandable to 32K buffer. **£289.00**

CITIZEN MSP-15E

17" Wide carriage. 136 column, operating at 160 cps and at the push of a switch will print near letter quality at 40 cps. Fully Epson and IBM compatible. 8k of standard buffer built in. Standard Centronics are optional RS232 **£379.00**

COLOUR PRINTERS

Canon PJ1080A **£440.00**


TRACTOR ADAPTERS

FX85	£33.00
LX80	£23.00
Juki 6100	£129.00
Juki 6300	£129.00
Quendata DWP 1120	£114.00
Brother HR 15	£95.00
LQ 800	£43.00

SHEET FEEDER


Juki 6100	£173.00
Juki 6300	£173.00
Quendata DWP 1120	£165.00
Brother HR 15	£212.00
LX80	£55.00

Printer Buffer




Now available
Taxan Multipurpose Type Printer Buffer KIF-4308 compatible with any Centronics interface printer **£149.00**

PRINTER STAND



£18.00
Inc. VAT

CONSTRUCTED FROM STEEL SO WILL NOT BEND OR BUCKLE
WORKS WITH BOTH CENTRE AND BACK FEED PRINTERS
POSITIONS PRINTER TO GIVE SUPERB VIEWING ANGLE
REVERSED THE STAND BECOMES IDEAL FOR COMPUTERS AND MONITORS
ADJUSTABLE TO NEARLY ALL PRINTERS
SAVES SPACE AND GIVES PAPER STORAGE
FOAM PADS PREVENT VIBRATION AND SCRATCHING OF DESK TOPS

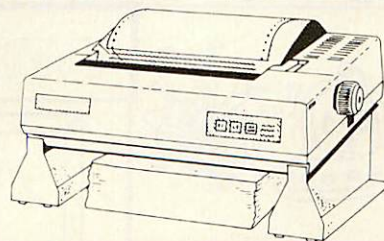

Accessories

Raven Discs Double Sided, Double Density 96 TPI uses 3M media. Guaranteed for life. Free library Box included **£17.00**

Lockable Disk Storage Boxes
40*3 1/2 Disk Storage Box **£6.99**
70*5 1/4 Disk Storage Box **£9.95**
100*5 1/4 Disk Storage Box **£14.00**

NIGHTINGALE MODEM

Including Commstar and Comprehensive Manual **£130.00**

Auto Dial/Auto Answer Board **£55.00**
Auto Dial Utilities Disc **£11.00**
OBBS Bulletin Software **£23.00**

EPROMS

2764 **£2.20**
27128 **£3.95**

RAMS

6264 LP 15 **£3.95**
EPROM Extractor **£5.00**
EPROM Eraser **£32.00**
Soft Life EPROM Blower **£75.00**

GRAPHPAD 2

Draw and Paint in numerous colour and pattern combinations. Copy, invert, mirror and flip any part of your picture. Define your own symbols and colour patterns. With new System 1 ROM Art Software only **£69.00**

JOYSTICKS

Voltmace 14b Handset **£14.95**
3b Singlet **£12.95**
3b Duoset **£19.95**
14b Interface **£14.95**
DRAWER Cassette **£5.95**
DATAPAD Keyboard **£39.95**

SYSTEM SOFTWARE

THE MUSIC SYSTEM **£29.95**
Disk Pack **£14.95**
Cassette 1 **£14.95**
Cassette 2 **£14.95**

EXPANSION BOARDS

Sideways, ROM/RAM Expansion for the BBC Micro **£42.00**
Battery back up kit **£18.00**
CMOS RAM 8K Bytes **£5.00**
Sideways Plus ROM board for the new BBC B+ computer **£36.00**

Range of software specifically designed to enhance and extend the use of sideways RAM an ATPL Sideways. Spool it - allows the sideways RAM to be used as an 8K or 16K printer buffer **£11.50**
DFS Shift - moves the user RAM workspace required by the DFS into sideways RAM. Allows memory recovery to 0E00 with Acorn 0.9 DFS only **£11.50**

Sideswipe - allows you to save sideways ROM onto disc and load sideways ROMs from disk into RAM. **£11.50**

Turboprom - 1-2 uses a fast programming algorithm to greatly reduce programming time of EPROMS (14 mins - 2 mins). Used with Autoprom available on disc or Sideways ROM **£17.00**

Custom RAM/ROM writer utility to produce a ROM image for Autoprom or Sideways RAM to automatically download and run a Basic programme and/or your utilities on power up. Several utilities supplied with this package. Please specify 40T, 80T disc or cassette. **£17.00**

BBC BOOKS

BBC B Compendium **£5.95**
Advanced Disk User Guide **£14.95**
Advanced Basic Rom User Guide **£9.95**

The Epson FX Kaga Printer Commands Revealed **£5.95**
BBC Micro Disk Drives **£6.95**
Complete Disk Manual **£7.95**
The BBC Micro Rom Book **£9.95**

The Super User's BBC Micro Book **£9.95**
View BBC **£10.00**
View Store **£10.00**
Viewsheet Electronic S/Sheet **£10.00**
BBC **£10.00**

Clares Betabase **£23.00**
Clares Graphdisk **£12.30**
Clare Replica III Disk **£13.50**
Clares the Key Disk **£12.30**
Betabase **£21.00**
Betabase Utilities **£11.00**
Beta Accounts **£21.00**
Profile **£11.00**
Font Editor **£17.00**
Fontwise Plus **£17.00**

BEEBUG

Toolkit Plus **£35.00**
Wordease ROM **£22.00**
Wordease Disc **£19.00**
ICON Master **£30.00**
Studio Eight **£19.00**
ROMIT **£30.00**
Sleuth ROM **£28.00**
Exmon 2 **£28.00**
Help 2 **£27.00**
Spellcheck 3 **£32.00**
Dumpmaster 2 ROM **£27.00**
Dumpmaster Disk **£13.00**
Program Bulder **£19.00**
Discmaster **£13.00**
Teletext **£13.00**
Sprites **£13.00**
Muroom **£28.00**
Quickcalc **£16.00**
Hershey Font **£19.00**
Billboard **£21.00**
Design **£21.00**
Paintmaster **£15.00**

ALTRA

Enigma Disk Imager **£42.00**
Tube Editor **£42.00**
Probe I **£34.00**
Basic Editor 2 **£34.00**
Basic Editor I **£25.00**
First Aid II **£19.00**

GEMINI

Datagem Database **£79.00**
Gemini DDD Base **£29.00**
Gemini DDD Calc **£29.00**
Gemini DDD Plot **£29.00**
Office Maste **£12.00**
Office Master **£25.00**
Fleet Street Editor **£39.95**

LBO

Life & Business Organiser **£19.50**



Services

Many components now in stock. Call for details and price.

SERVICES

Fast Repair Service for the BBC Computer
average charge from **£23.00**
Printer repairs from **£20.00**
Disk Drive repairs from **£15.00**


BBC COMPUTER SPARE PARTS AND COMPONENTS

PSU **£59.00**
Keyswitch **£2.00**
Complete Keyboard **£59.00**
Keyboard Connector **£5.18**
UHF Modulator **£5.18**
Video ULA **£20.00**
Serial ULA **£16.00**
6522 VIA **£4.10**
6502 2 MHZ CPU **£7.50**
UPD 7002 **£17.25**
6845SP CRT CON **£7.50**
SAA 550 Teletext **£10.35**
LM 324 **£0.50**
6522A 2 MHZ VIA **£6.33**
8271 **£52.00**
74 LS 123 **£0.46**
74 LS00 **£0.28**
74 LS04 **£0.28**
74 LS10 **£0.28**
7438 **£0.46**
74 LS 163 **£0.86**
74 LS 244 **£0.92**
74 LS 245 **£1.27**
74 LS 375 **£1.04**

TWILLSTAR COMPUTERS LTD

AMX MOUSE & SOFTWARE

AMX Mouse with Super Art ROM **£79.00**
AMX Mouse with Super Art ROM Master **£89.00**
AMX Pagemaker BBC/Master **£49.95**
AMX 3D Zicon **£24.95**
AMX Database **£24.95**
AMX XAM **£24.95**
The Original AMX art Plus Utilities **£14.95**
AMX Paintpot **£14.95**
AMX Desk **£24.95**



PLINTH FOR BBC MICRO

The single Plinth is suitable for BBC & Monitor. The double height provides enough room for single or side by side dual drives. The computer slides in to the lower section.
Single BBC Plinth **£11.50**
Double BBC Plinth **£21.00**
Printer Plinth **£11.50**
Single Master Plinth **£16.00**
Double Master Plinth **£26.00**
Disk drive Bridge for Master 128 complete with Switch mode PSU for dual drives. Mounted with 40/80 switches in the front. Will take any slimline drive and the computer neatly slides in the lower section **£85.00**

BBC Software

ACORN SOFT

Acorn View Word Processor **£44.00**
Acorn View Sheet **£44.00**
Acorn Logo ROM **£55.00**
Acorn ISO Pascal **£55.00**
Acorn BCPL **£39.00**
GXR ROM **£25.00**
View 3.0 **£59.00**
Hi-View **£44.00**
View Store **£44.00**
LISP ROM **£49.00**
BASIC Editor **£27.00**
Terminator **£29.00**
Microprolog **£65.00**
View Spell **£34.95**
View Plot **£25.00**
Comal **£44.00**

COMCONCEPT

Wordwise **£30.00**
Wordwise Plus **£45.00**
Intersheet **£45.00**
Disk Doctor **£27.00**
Printmaster (Epson) **£27.00**
Printmaster (Star) **£27.00**
Caretaker **£27.00**
Graphics ROM **£27.00**
Communicator **£59.00**
Accelerator **£55.00**
Gremlin Debug ROM **£27.00**
Interchart **£29.00**
Speech ROM **£30.00**
Speech Processor **£10.00**
Interword **£49.00**
Interbase **£55.00**

CLARES

Frontwise Plus **£19.00**
BROM+ ROM **£31.00**
BROM+ Disk **£27.00**
Wordease **£27.00**

PACE

Commstar **£33.00**
System ADE ROM **£60.00**
System SPY ROM **£30.00**
Edword User Pack **£44.00**
Edword Teacher Pack **£25.00**
BBC Ultracalc II **£79.00**

VINE

Replay ROM **£34.00**
TD ROM **£18.00**

MISC.

View Index **£14.90**
View Printer Driver **£11.00**
Generator Disc **£9.50**
Cass **£39.95**
Ram Rod ROM **£37.95** Disc **£32.00**
Advanced Disc Toolkit **£19.00**
Beeb Text Plus **£27.00**
Advanced Disc Investigator **£28.00**
Floppywise Plus **£14.95**
Advance Ram Manager **£65.00**
Iso-pascal (c) Master **£65.00**
Logo (c) Master **£55.00**
Lisp (c) Master **£55.00**

GAMES DISK

All the latest games in stock. Call for details!!! And ask for our latest catalogue. Listed all games and prices. Or visit our showroom and see for yourself.

MULTI-font NLQ (ROM and 40/80 Disk)

A very powerful facility which will allow the user to display text, information of any kind from sideways RAM. Compatible with most sideways RAM units including ATPL sideways with RAM, Solidisk SWR, BBC B Plus 128K & BBC Master Series. **£30.00**

How to Order

You can purchase any of the items listed. All you have to do is write your requirements on a sheet of paper, and we will despatch your goods within 24 hours, subject to availability. Please add the following amounts for Postage and Packing.

Items below £10.00 add **£1.50**
Items below £50.00 add **£2.50**
Items below £100.00 add **£3.50**
Items over £100.00 add **£8.00**
(UK Mainland only)

All prices include VAT at 15% 'No Hidden Extras'
Prices correct at time of going to press but subject to change without notice.

Please make cheques payable to:

TWILLSTAR COMPUTERS LTD.

Access/Visa Card Holders:

Welcome. Call now on:-

01-571 5938 or 574 5271

CREDIT FACILITIES

Full credit facilities now available nationwide

* **LOW DEPOSITS**

* **FAST FRIENDLY SERVICE**

* **UP TO 3 YEARS TO PAY**

Call for further details



Typical APR 36.3%

TWILLSTAR COMPUTERS LTD

**APEX HOUSE, BLANDFORD ROAD,
NORWOOD GREEN, SOUTHALL,
MIDDX UB2 4HD**

Tel: 01-574 5271 01-571 5938



Telex: 25247 Telex G. attn TIL

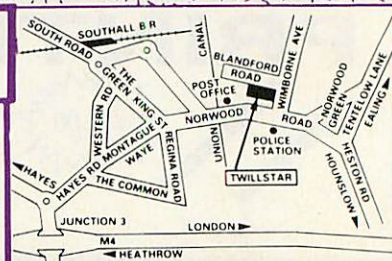

MAX

MAX
WORKS
WITH
KEYBOARD
JOYSTICK
OR AMX
MOUSE

A GEM OF A DESKTOP

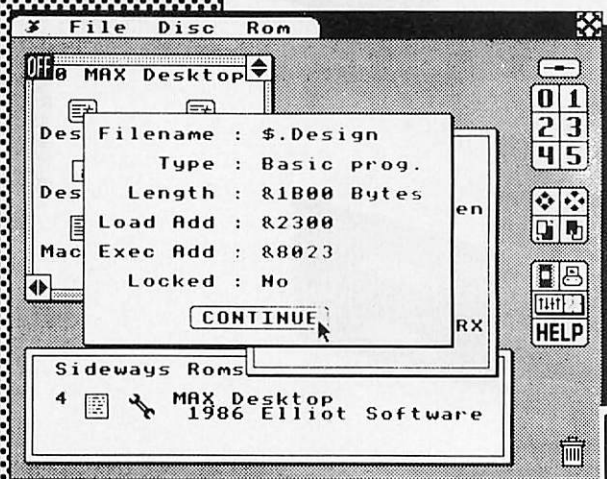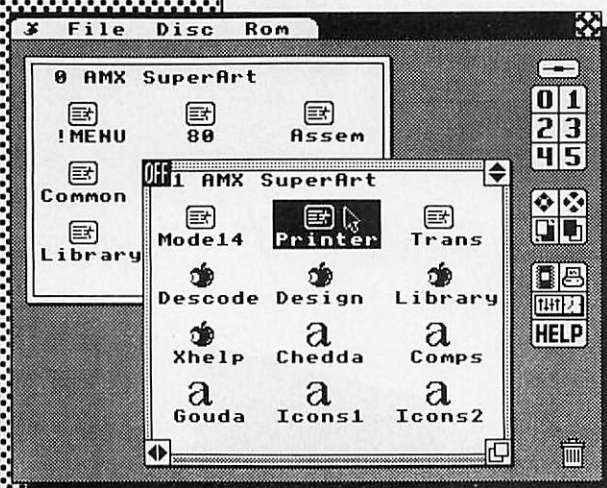

AVAILABLE FOR	
BBC B, B+, MASTER128, COMPACT SUPPLIED ON 16K ROM	£19.95
AMSTRAD CPC 464, 664, 6128 SUPPLIED ON DISC	£19.95
COMMODORE 64, 64C, 128 SUPPLIED ON DISC	£14.95
SPECTRUM 48K, +, 128 SUPPLIED ON MICRODRIVE	£14.95

FOR INSTANT ACCESS/VISA ORDERS TELEPHONE (0925) 413501/2/3

ADVANCED MEMORY SYSTEMS LTD · 166/170 WILDERSPOOL CAUSEWAY · WARRINGTON WA4 6QA · TELEX: 628672 AMS G

Using the latest Window, Icon, Menu and Pointer techniques, Max provides an easy to use, graphic based, front end for your computer's disc filing system giving the look and advantages of the latest 16 bit 'State of the Art' micros such as the Macintosh, Amiga and Atari ST.

Max has many machine specific features to bring out the best in your micro – you'll wonder how you ever did without it.

Max is available from all good computer dealers or direct using the Freepost order form below.



PLEASE SEND ME POST FREE

(Quantity) _____ BBC (ROM) @ £19.95 (Quantity) _____ AMSTRAD (DISC) @ £19.95
C64 (DISC) @ £14.95 SPECTRUM (MICRODRIVE) @ £14.95
ALL PRICES INCLUDE VAT AND POST AND PACKING

I ENCLOSE CHEQUE/POSTAL ORDER FOR £ _____

OR DEBIT MY ☐ ACCESS ☐ OR ☐ VISA ☐ (tick as appropriate)

CARD NO.

EXPIRY DATE

SIGNATURE _____

NAME (Block Capitals Please) _____

ADDRESS _____

POSTCODE _____

☐ PLEASE SEND ME FURTHER DETAILED INFORMATION ON THE AMS RANGE OF PRODUCTS (tick if appropriate)

MAX

IMAGINATION AT YOUR FINGERTIPS
SEND TO: ADVANCED MEMORY SYSTEMS LTD., FREEPOST, WARRINGTON WA4 1BR.



THE ULTIMATE RANGE

Because there's a vast number of applications for the BBC master computer, it stands to reason that there ought to be an equally large number of memory devices to deal with every requirement.

Nobody knows this better than Akhter; we've been serving the market for nearly a decade, that's why we've developed our UFD range with just about the most comprehensive selection of BBC compatible memory devices available.


We've got 40 and 80 track 3½" and 5¼" single and dual disk drives available with or without power supply. There's also a 3½" and 5¼" combined drive so that you can transfer software from one format to another.

If it's Winchester you are after you needn't look any further, we've got a range of drives up to 40MByte with standard controller card and ADFS ROM. The choice doesn't stop there because we've also developed units that include our own 10MByte tape streamer.

Today there is the need to combine several memory devices, for data storage, in a single unit – the fact that they can be used as a monitor stand is an added advantage. Akhter has developed a range of these combinational units that provide neat and simple solutions to perennial problems.

So now you can plug in a Nucleus 20 which combines a 20MByte Winchester, 10MByte tape streamer and 1MByte floppy drive, or if you prefer there is the Archive which incorporates a 1MByte disk drive with a 10MByte tape streamer. So whatever your requirements you'll find a unit in the UFD range that's right for you.

All Akhter products come in colour matched BBC beige and are supplied 100% function tested, complete with user manual and connection cables. If you would like any further information contact your local dealer or telephone Akhter on (0279) 443521.

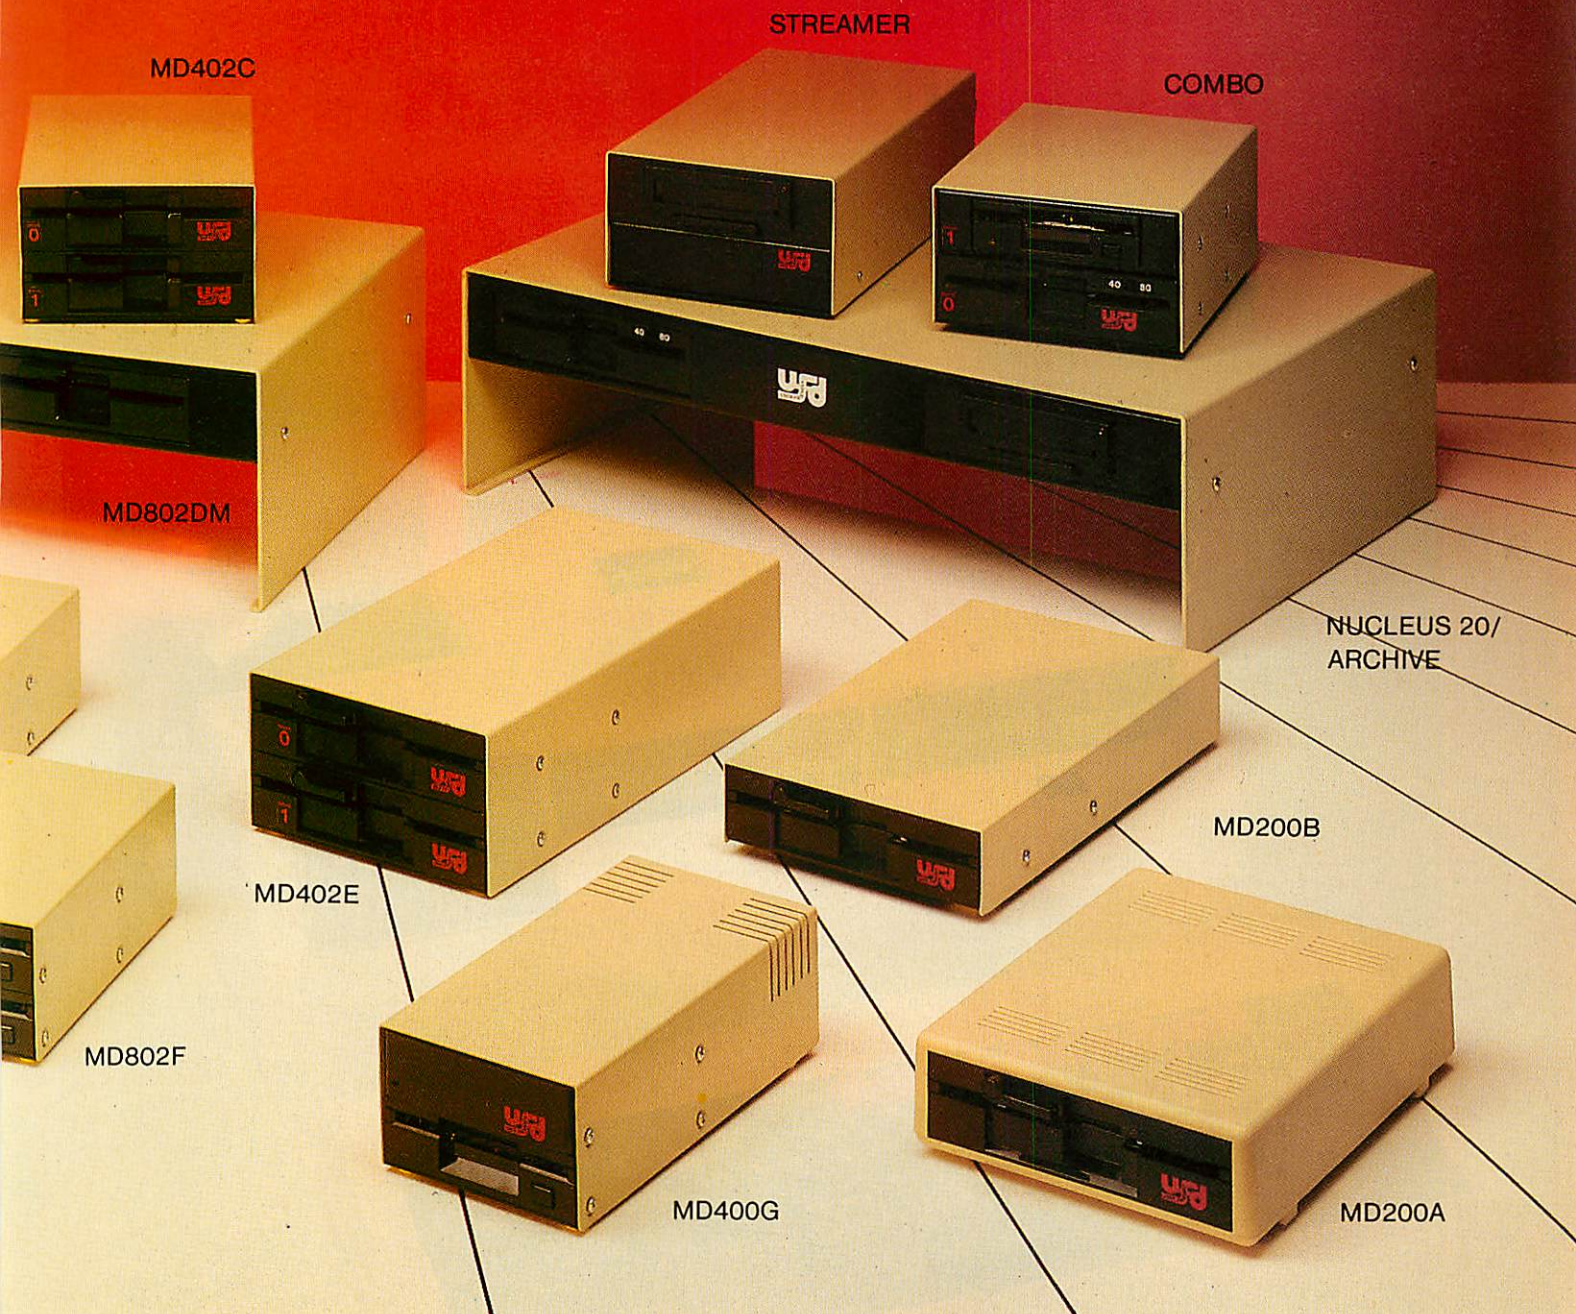

OF MEMORY DEVICES

MODEL	DESCRIPTION	PRICE	MODEL	DESCRIPTION	PRICE
MD400A	SINGLE 400K 40/80 T DS DD	£129.95	MD802F	DUAL 800K 80T 3.5" DS	£199.95
MD200A	SINGLE 200K 40T DS	£109.95	MD400G	SINGLE 400K 80T 3.5" DS PSU	£139.95
MD200B	SINGLE 200K 40T DS PSU	£129.95	MD802G	DUAL 800K 80T 3.5" DS PSU	£225.95
MD400B	SINGLE 400K 40/80 T DS PSU	£154.95	HD2000	20MB HARD DISK WITH PSU	£799.95
MD402C	DUAL 400K 40T DS DD	£209.95	HD4000	40MB HARD DISK WITH PSU	£1299.95
MD802C	DUAL 800K 40/80 T DS DD	£259.95	UFD2000	20MB HD 1MB FLOPPY PSU	£999.95
MD402E	DUAL 400K 40T DS PSU	£249.95	STREAMER	10MB STAND ALONE STREAMER	£799.95
MD802E	DUAL 800K 40/80T DS PSU	£299.95	COMBO	5.25" 40/80 T 400K & 3.5" 400K	£259.95
MD802DM	800K 40/80 T DS PLINTH & PSU	£324.95	NUC 20	20MB HD 10MB TAPE 1MB FLOPPY	£1799.95
MD400F	SINGLE 400K 80T 3.5" DS	£115.95	ARCHIVE	10MB STREAMER & 1MB FLOPPY	£999.95

ALL PRICES INCLUDE V.A.T. WE RESERVE THE RIGHT TO CHANGE PRICES WITHOUT NOTICE.
FOR FULL DETAILS OF OUR MEMORY DEVICES PLEASE ASK FOR OUR CATALOGUE.



Akhter Computer Group
Akhter House
Perry Road
HARLOW
Essex CM18 7PN
Tel: (0279) 443521
Telex: 818894 AKHTER G
Dealer Enquiries Welcome




MASTER TRANSFORMATION

The Viglen Master Console



Give your BBC Master Micro Computer the professional PC look by replacing your existing lid with this smartly styled package. The system is strong and constructed in high impact ABS colour-matched to the BBC Master, it gives your Master a very neat and impressive look.

The photograph shows a fully kitted out back panel with the host of accessories, such as switches, sockets, connectors, etc. (not supplied) but are available.

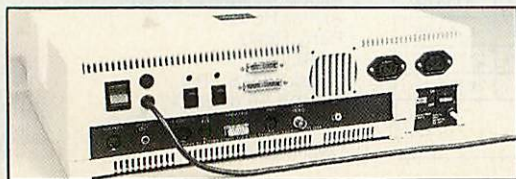

- ☐ Will support monitor – up to 16" television set.
- ☐ Can house two 5¼" disks or Winchester drives.
- ☐ Capable of housing 3½" drives.
- ☐ Includes two switches (can be used for 40/80 track switching) which can be fitted in the front or the rear. The above photograph shows two front fittings.
- ☐ Will take two Acorn cartridges or two Viglen cartridge system: each system is capable of accepting two Viglen cartridges, thus allowing a total of four Viglen cartridges to be used.
- ☐ Keyboard is separate for ease of use.
- ☐ Full internal metal screening.
- ☐ Supplied with easy, do-it-yourself, fully illustrated instructions or can be fitted by Viglen.
- ☐ Available with fitted drives (5¼", 3½" or Winchester) or as a complete system including the master and monitor.

Viglen

PACKAGE INCLUDES:


1. Remote keyboard case with 1.2m cable.
2. Metal screened main unit casing including internal fittings 5 1/4" drives.
3. Two switches which can be used for 40/80 track switching and be fitted either to the front or back of the unit.
4. Two blanking plates to blank out any drive apertures that are not used.
5. Full labelling kit.
6. Fully illustrated fitting instructions.

ONLY £59.00 inc VAT

(Please add £8 for insured courier delivery.)

ACCESSORIES

DESCRIPTION	PRICE INC VAT
(a) Dual drive data cable	£9.00
(b) Dual drive power cable	£5.00
(c) Internal switched mode power supply	£32.00
(d) Fan kit	£25.00
(e) Viglen Master Cartridge System including two Viglen Cartridges	£14.95
(f) Viglen cartridge	£1.99
(g) Fitting (for 3 1/2" drive)	£9.00
(h) Fitting charges start from	£15.00

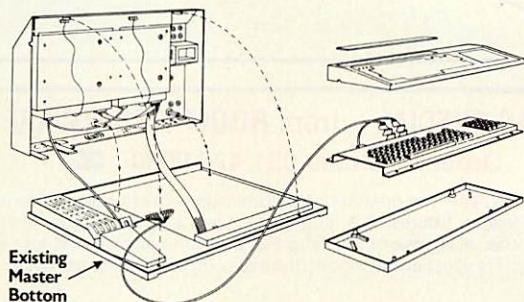

SHOWROOM OPENING TIMES
 MONDAY-FRIDAY 9.00-5.30
 SATURDAY 9.30-2.00

Orders from Educational Establishments, Government Departments and Plc Companies accepted. Education discounts available, please call. Prices correct at time of going to press and subject to availability.

Viglen Computer Supplies: Unit 7, Trumpers Way,
 Hanwell, London W7 2AQ, Sales Hotline 01-843 9903.
 Telex: 919 304 VIGLEN G Fax: 01-574 5126

Please send me _____ (Qty) Master Console System(s) Plus
 Optional Extra(s) _____ State ref. letter
 I enclose Cheque/P.O. for _____
 Please add £8 for postage, packing and insurance. I prefer to pay by
 ACCESS/BARCLAYCARD* (Delete whichever is not applicable)
 Card No. _____ Expiry Date _____
 Signature _____ Name _____
 Address _____

 Postcode _____
 Tel. No. _____

Credit cards valid if signed by Cardholder. Address below must be the same as card holder's.



Winter Wonderland




MEDALLION GRAPHIC ADVENTURE

Breaking through the dense cloud cover you were relieved to see a dazzling white snowfield spread below you. Desperately preparing for a crash landing, you were distracted by a glint of sunlight on glass – a building! Could THIS be the lost civilisation?

Your attention however was drawn back to the ground hurtling towards you ...

From the producers of
THE GRAPHIC ADVENTURE CREATOR

AVAILABLE FROM
 ALL LEADING RETAILERS
 or direct from:
INCENTIVE SOFTWARE LTD.,
 2 Minerva House, Calleva Park,
 Aldermaston, Berkshire RG7 4QW.
 Telephone: (07356) 77288.

PRIORITY ORDER FORM

Please rush me for my:

Spectrum ☐ BBC B ☐ Commodore 64 ☐ Amstrad CPC ☐

WINTER WONDERLAND £7.95 ☐

Apache Gold (except BBC) £7.95 ☐

Graphic Adventure Creator { Tape £22.95 ☐ Disc £27.95 ☐

I enclose cheque/PO or please accept my credit card No. _____

Name _____

Address _____

The Shape of Things to Come....

ALL Disks carry a **LIFETIME WARRANTY**

3 1/2" Microdisks
With Labels etc.

	10	50
SS/DD	£14.95 £69.95	£69.95 £89.95
DS/DD	£19.95 £89.95	£89.95 £109.95

*+£1p&p *+£2p&p
*10's Boxed *50's Bulk Packs*

DISK PRICES *!!SLASHED!!*

24Hour Credit Card
Order Line
0509-233893

Despatch: Same Day on ALL orders Before 3pm
Disks - Same Day 1st class post

5 1/4" Blank Disks

Individually Certified Envelopes Labels
Write Protect Labels etc

	10	50
SS/DD	£7.95 £39.95	£39.95 £49.95
DS/DD	£9.95 £49.95	£49.95 £59.95

*+£1p&p *+£2p&p

FREE Plastic Case per 10
FREE Lockable Storage Box per 50 Disks

5 1/4" Bulk Packed Blank Disks

Individually Certified
FREE Envelopes Labels
Write Protect Labels etc

100-SS/DD... £39.95
100-DS/DD... £49.95
+12 p.p. per 100
Save!

3" CF-2 Amsoft Microdisks

From the U.K.'s **LARGEST Supplier**
Individually packed in
Plastic Cases - Boxed in
5s or 10s

5-£16.95/10-£31.95
BOX +£1 p&p
Bulk Order Discounts Too!!!

Phone NOW for details of our NEW
SENSATIONAL Software Store
on Softline
0509 266322

Compumart
Please send Cheques/P.O.'s to...
Compumart DEPT ACU Unit 8 Falcon St.
Loughborough Leics LE11 1EH
0509 262259



newsight

NEWSIGHT LTD., RELIANCE HOUSE, 340 CLAPHAM ROAD,
LONDON SW9 9AT. TELEPHONE: 01 627 3148/9.

Art Design & Technology · Business Genesis · Computer Systems

COMPUTERS IN FASHION

If you are a home based knitter; a knitted textile business; knit, print or graphics designer; student of applied arts & crafts; or anyone interested in pattern design or mathematics, home economics and computers for that matter...

And therefore want to create unlimited designs: from simple to sophisticated, and possess a BBC Model B micro, B+, Master 128 or Nimbus, then NEWSIGHT's unique KNITTING SOFTWARE package is for you! With KNITTING SOFTWARE you can create three-colour designs for fabric or any other surface &, for knitting, convert your chosen design into a pattern for a sleeveless slipover or singlet. To produce your design, choose any one of four design tools:

- 1. Regular repeating patterns by TESSELATION. Create your own pattern module for repetition over the whole screen.
- 2. Patterns using on-screen SKETCHING using the keyboard to draw lines, curves, circles & for colour fill-in.
- 3. Your fancied pattern selected from a RANDOM moving kaleidoscope.
- 4. Selecting a computer-generated flowing WAVE pattern creating spirals and whorls.

Then KNITTING SOFTWARE will give you hand or machine knitting PATTERN INSTRUCTIONS adjusted to the body measurements you feed in.

Also a STITCHMAP can be produced showing all the individual stitches of the garment on a picture-grid.

Plus - all designs, garment pictures and knitting pattern instructions can be produced as hardcopy using an Epson RX80 or compatible printer.

This original and exciting software is for men, women and children; for schools & colleges; for those aged 5 to 90!

Usual retail price £49.50 + £2.40 p&p/Schools £39.50 + £2.40 p&p.

Please send me _____ copies of KNITTING SOFTWARE @ the discount CHRISTMAS PRESENT price of £31.95 each plus £2.40 p&p in the UK and £3.40 rest of the world.

☐ 40 track disc ☐ 80 track disc

I enclose my cheque/Postal Order made payable to NEWSIGHT LTD (official orders from schools etc are welcome too, for this Christmas discount)

NAME: _____

ADDRESS: _____

POST CODE: _____

Signed: _____ Date: _____

Send this form off, post-haste, with your remittance (or official School/College order) to: DOREEN DAVIES, NEWSIGHT LTD, 340 CLAPHAM ROAD, LONDON SW9 9AT.

XMAS SPECIAL - from ROOM 7 SOFTWARE

Order for Xmas 051-426 9660

SOCCER BOSS - The greatest football management simulation game yet. Includes league fixtures, F.A. cup games, and Littlewoods cup games. Substitutions, suspensions, injuries, Full 22-team half-time and full-time scores etc. Try your hand at winning the treble, (or being relegated.) DISC or TAPE.

£11.95

POOLS CHEQUE - Ideal for pools entrants, syndicates or Litplan Users. As many copies of printout as required. Stores your lines or perms, once results are known enter them and the computer automatically prints out your highest score. DISC ONLY.

£12.50

THE INVESTMENT ANALYSER - Analyses Unit-linked Life Assurance, Unit Trust and Share Investments for up to 10 years. Monitor performance graphically and review values, costs and changes for a maximum of 26 investments per disc. DISC ONLY.

£18.95

EASY BANKER - FULL AUTOMATIC standing orders and regular payments make this an ideal program for people who want to keep track of how much money they have left in their bank accounts. It handles up to 20 accounts per disc and approx. 1,000 transactions between these accounts. Transactions can be redated and resequenced for comparison and checking with bank statements. DISC ONLY.

£8.50

INTRODUCTION TO STATISTICS For anyone wishing to use their computer for educational purposes this program covers basic statistics including diagrammatic representation, barcharts etc., and mean and standard deviation, amongst other elementary statistical principles. DISC ONLY.

£9.95

Available on BBC 'B' and MASTER.
Please state 40 or 80 track disc.
All prices include V.A.T. at 15%

Letters/cheques to: W.L. Computer Services,
First Floor, H.S.L. Buildings, 437 Warrington Road,
Rainhill L35 4LL.

VISA card orders - tel: 051 426 9660.





Educational Software Selection

Volumes 1-3

5 PROGRAMS PER VOLUME ★ FOR AGES 7 TO 13 YEARS ★ FOR ALL THE FAMILY ★ DISK ONLY

Available for the BBC B, B+, Master 128 and Master Compact

- ★ Variety of content - historical, environmental, mathematical
- ★ Choice of levels and range of outcomes to ensure repeated use
- ★ Designed as team games for all the family with no time limits
- ★ Involve problem solving, decision making, planning strategies
- ★ Maximise learning through discussion, "What will happen if...?"
- ★ Include essential worksheets and program notes
- ★ Produced by the team whose programs are in thousands of schools

Volume 1 Program titles are:
 ★ Fletcher's Castle ★ Thorn Sea
 ★ Treasure ★ Money Target
 ★ The Perfume Hunter

Volume 2 Program titles are:
 ★ The Raiders ★ Island Yacht Race ★ Find The Question
 ★ Can You Make It? ★ Deliver The Message

Volume 3 Program titles are:
 ★ The Bordar's Daughter
 ★ Ferry Captain ★ Bridges
 ★ Market Stall
 ★ Name The Square

Each volume £24.95 incl. VAT and P&P — DISK ONLY

When ordering specify 40 or 80 track disk

for BBC B/B+/Master 128

3.5" disk for BBC Master Compact.

Official orders welcome. Trade enquiries welcome.

Orders and catalogue requests to:

FERNLEAF EDUCATIONAL SOFTWARE

Fernleaf House, 31 Old Road West, Gravesend, Kent DA11 0LH

Tel. 0474 359037 (24 hrs)



PRINT YOUR OWN T-SHIRT

in black or colour

SIMPLY REPLACE PRESENT RIBBON WITH A TRANSFER RIBBON IN YOUR PRINTER THEN DUMP YOUR SCREEN MASTERPIECE TO ORDINARY PAPER AND IRON ONTO THE FABRIC.

(For LESS than 50p!)

Get upto 50 T-Shirts from each printer ribbon.

Ideal for Schools, Plays, Sponsored events, Clubs.

Both prices include VAT

Post & Packing FREE!

Available For these Printers

Permanent and Washable!

Epson FX80/MX80/RX80: NEC8023: STAR RADIX 10:
 Apple Imagewriter: Commodore 4022 & 8022: IBM PC 5152
 Okidata 82/92: Gemini 10X

Please state clearly which printer you have.



Cheques With Order only please to: Banbury Business Computers

15 Banbury 123 B Colours 3, Schofields Way, Bloxham, Banbury, Oxon. OX15 4NS.

Telephone (0295) 720812

Dealers Wanted In U.K.
 Special School Prices.

Carswell Computers

24 Elm Road, Faringdon, Oxon SN7 7EJ. Tel (0367) 21153
TYPEASY Version 4

- Touch typing course for the BBC B, B+, Master & Electron (version for the compact soon)
- Mistakes displayed with flashing letters
- Teaches correct finger movement
- 139 progressive exercises plus routines for writing more yourself
- Displays errors, speed and performance


disk (40 or 80 tracks) £15, Econet (80 track) £30, cassette £7.50

TYPE INVADERS

- Increases your speed - we guarantee!
- Letters and words rain down faster and faster - type correct letters to stop them
- 10 levels with four speeds plus colour and sound
- See review in Acorn User July 86

Disc (40 or 80 track) £12.50, Econet disc (80 track) £25, Cassette £7.50
 Prices include P&P, please add 15% VAT

TWO INTO ONE WILL GO!

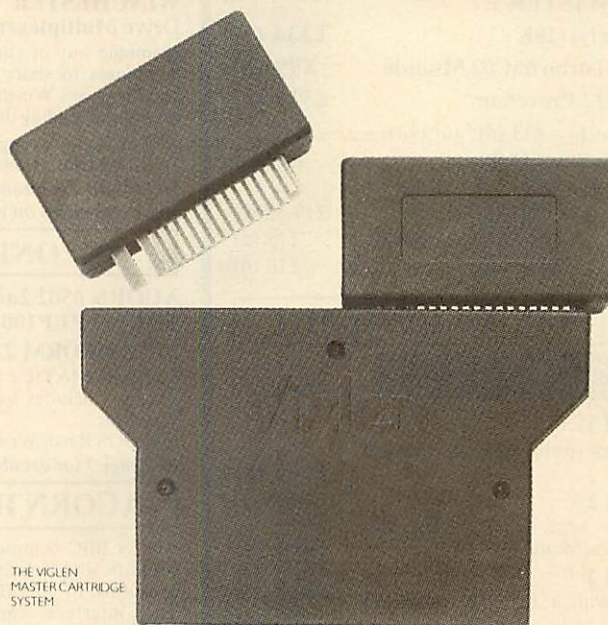

THE VIGLEN MASTER CARTRIDGE SYSTEM

The Viglen Master Cartridge System plugs into the Master cartridge slot enabling it to accept two Viglen Cartridges (the same cartridges that are used for the BBC micro fitted with the Viglen ROM Cartridge System). Once the system is plugged in you can insert and remove Viglen cartridges fitted with any ROM or Eeprom programs available for the Master. Up to two systems can be fitted allowing a total of 4 Viglen Cartridges to be used.

- Simply plugs into the Master cartridge slot
- Each system accepts two Viglen cartridges giving access to a total of 4 Viglen Cartridges
- Will accept the Viglen Cartridges as used on the BBC micro
- Each Viglen Cartridge will take 8K, 16K, 32K (Paged type), 64K (Paged type), ROMs or EPROMs. Simply unscrew the cartridge case, insert the ROM/EPROM and screw the case back on
- Low price cartridges
- Adaptor includes two FREE cartridges

Price inc. VAT

Viglen Master Cartridge Adaptor System including two Cartridges

£14.95

Cartridge

£1.99

Postage and Packing for System

£2.50

Postage and Packing for up to 4 Cartridges

£1.50

Orders from Educational Establishments, Government Departments and Plc Companies accepted. SHOWROOM OPENING TIMES
 MONDAY - FRIDAY 9.00 - 5.30
 Education discounts available, please call. SATURDAY 9.30 - 2.00

Prices correct at time of going to press and subject to availability.

TRADE ENQUIRIES: Viglen Products Limited, 23/28 Penn Street, London N1. 01-729 2100.

SALES HOTLINE
 01-843 9903

Viglen Computer Supplies: Unit 7,
 Trumpers Way, Hanwell, London W7 2QA

Viglen

Please send me _____ system(s) _____ Cartridges

I enclose Cheque/P.O. for £ _____

Please add £2.50 for postage and packing (£1.50 only for cartridges)



I prefer to pay by ACCESS/BARCLAYCARD

Card No. _____

Signature _____

Name _____

Address _____

Expiry Date _____

Credit Cards valid if signed by Cardholder. Address must be the same as cardholder's.

**BBC COMPUTER
& ECONET
REFERRAL CENTRE**
ESTABLISHED OVER 15 YEARS

TECHNOMATIC

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

305 Edgware Road, London W2 Tel: 01-723 0233

BBC MASTER SERIES

AMB15 MASTER			
Foundation 128K.			
			£434 (a)
AMB12 MASTER ET			
(ANFS only) 128K			
			£334 (a)
AMCO6 Turbo 65C02 Module			
			£99 (b)
ADC08 512 Processor			
			£329 (b)
ADFI3 ROM Cartridge	£13 (d)	ADJ23 Ref Manual	
ADFI0 Econet Module	£41 (c)	Part II	£14 (c)
ADJ22 Ref Manual		ADJ24 Adv	
Part I	£14 (c)	Ref Manual	£19.50 (c)
BBC MASTER		View User Guide	£10 (d)
Dust Cover	£4.75 (d)	Viewsheet User Guide	£10 (d)

BBC MASTER COMPACT

A free packet of ten 3.5" DS Discs with each COMPACT

See page 5 for details

SYSTEM 1	
128K, Single 640K Drive & bundled software.	£385 (a)
SYSTEM 2	
System 1 with a 12" Hi Res Monochrome Monitor.	£469 (a)
SYSTEM 3	
System 1 with a 14" Med Res RGB Monitor.	£599 (a)
Second Drive Kit.	£99 (c)
Extension cable for external 5.25" Drive.	£10 (d)

UPGRADE KITS

1.2 OS ROM	£15 (d)	ADFS ROM	£26 (d)
DNFS ROM	£17.50 (d)	1770 DFS Kit	£43.50 (d)
BASIC II ROM	£22.50 (d)	Econet Kit	£55 (d)

ECONET ACCESSORIES

Econet Starter Kit	£85 (b)	Econet Bridge	£174 (b)
Econet Socket Set	£29 (c)	Printer Server Rom	£41 (d)
File Server Level II	£125 (b)	10 Station Lead Set	£26 (d)
Ad Econet User Guide	£10 (d)	Econet Manager's Guide	£10 (d)

32016 CO PROCESSOR

For full specification see page 5 **£1,099 (a)**

CAMBRIDGE W/STATION

For full specification see page 5 **£3,450 (a)**

PANOS/PANDORA Upgrade incl 32000 BASIC FP.	£29 (d)
Co-Processor upgrade to 10 MHz operation (to enable use of ADFS with floppy drives).	£POA (d)
32016 Instruction Set Manual.	£25 (c)

WINCHESTER DRIVES

Acorn 30 Mbyte Winchester with File Server Level III and ADFS hierarchical filing System.	£1,549 (a)
P20HD TECHNOMATIC 20 Mbyte Winchester Drive fully compatible with Acorn ADFS and FS III. Includes ADFS Rom.	£635 (a)
P204HP TECHNOMATIC 20 Mbyte Winchester and a 80T DS floppy Drive built in a monitor stand. Includes ADFS Rom.	£849 (a)
P204IHT As P204HP but also with a 10 Mbyte tape streamer backup unit and backup utilities. Includes ADFS Rom.	£1,499 (a)

TS10 10 Mbyte Tape Streamer Backup unit with utilities.

£695 (a)

TFC10 10 Mbyte Pre-formatted Cartridge for use with P204IHT and TS10.

£19 (d)

WINCHESTER

Drive Multiplexer

A unique way of allowing two to four computers to share the large storage capacity of Winchester drives for saving and loading data.

£99 (b)

TWM2 for two computers.

£159 (b)

TWM4 for four Computers.

Details on Technomatic Winchester and accessories on page 6

SECOND PROCESSORS

ACORN 6502 2nd Processor

£173 (b)

TORCH ZEP100

£229 (a)

MULTIFORM Z80

TECHNOMATICs multi format Z80 system includes a FREE Pocket Wordstar.

£299 (b)

MS/DOS Read/Write Utility.

£49 (d)

See page 7 for details.

ACORN IEEE INTERFACE

Allows BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard. The interface can link upto 14 compatible devices. Typical applications are in experimental work in academic and industrial labs.

£265 (a)

TELETEXT ADAPTOR

Converts your computer into a teletext receiver.

£119 (b)

BBC Publications rom for enhanced Teletext Utilities.

£7.95 (d)

ROBOCOM BITSTICK

BITSTICK II

£755 (a)

Upgrade for Bitstick I to II

£415 (a)

Epson FX80 Dump for Bitstick I/II

£25 (d)

PRINTERS

EPSON LX86

120 cps, variety of fonts including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard.

£209 (a)

EPSON LX80/86 Tractor Feed

£20 (c)

EPSON LX80/86 Sheet Feeder

£49 (c)

EPSON FX85

160cps, 80 col, 8K buffer, NLQ, IBM compatible graphics Variety of fonts, multiple density bit image mode.

£315 (a)

EPSON FX105

As FX85 but with wide carriage for 136 col

£435 (a)

EPSON EX800

See specification on page 5

£409 (a)

EPSON LQ800

See specification on page 5

£439 (a)

EPSON LQ1000

As LQ800 but wider carriage for 136 columns

£619 (a)

TAXAN KP810

140 cps, 80 col, NLQ, 2K buffer, variety of fonts, quad density hi res bit image graphics, centronics interface standard

£215 (a)

TAXAN KP910

As KP810 but with wide carriage for 156 col

£349 (a)

NATIONAL PANASONIC

KX P1080

£149 (a)

See specification on page 5.

STAR NL 10 (Parallel Interface)

£239 (a)

STAR NL 10 (Serial Interface)

£279 (a)

EPSON JX80 colour printer

£420 (a)

INTEGREX Multicolour Inkjet printer.

£549 (a)

Ideally suited for high res colour VDU screen dumps. Quietness & consistent output are major characteristics. BBC Screen dump for Integrex.

£525 (a)

£15 (d)

CANON PJ1080A printer

£409 (a)

4 Colours.

BROTHER HR20

A new attractively styled printer from Brother with unusually quiet operation, host of new features, including option to copy current document. 8K buffer standard expandable to 16K. Parallel & Serial ports as standard.

£329 (a)

JUKI 6100 Daisy wheel printer

15 cps, 2K buffer, switchable 10/12/15 cpi proportional spacing, underlining. Parallel interface.

£279 (a)

PLOTTERS

See details on page 5.

EPSON HI 80 PLOTTER

£319 (a)

HITACHI 672 PLOTTER

£459 (a)

GRAPHICS WORKSTATION

£599 (a)

LINEAR GRAPHICS

A4 PLOTMATE

£224 (a)

A4M PLOTMATE

£299 (a)

A3M PLOTMATE

£426 (a)

PRINTER SHARERS & BUFFERS

BUFFALO 32K

32K parallel buffer for internal fitting to most EPSON/Epson compatible printers.

£75 (c)

TECHNO SHARER BUFFER

A unique sharer/buffer connects upto 3 computers to a single printer with auto scan and switching to computer outputting the data. Printer PAUSE, COPY and CLEAR facility. Mains powered, two buffer sizes 64K & 256K

TSB 64

£199 (b)

TSB 256

£275 (b)

PERIPHERAL & COMPUTER SHARERS

High quality switches to allow the user to switch between computers, printers, modems etc. Fully shielded metal cases. all lines fully switched.

		Parallel		Serial
3 Computers to 1 Printer	36v36-3	£69 (c)	25v25-3	£65(c)
4 Computers to 1 Printer	36v36-4	£85 (c)	25v25-4	£75(c)
2 computers/2 Printers X-over	36v36-x	£69 (c)	25v25-x	£65(c)
BBC Cable set 3 to 1 (1m ea)		£32 (d)		£34(c)
BBC Cable set 4 to 1 (1m ea)		£39 (d)		£41(c)

BBC Computer Sharer: TCS26

1 computer to 2 printers fitted with BBC cable

£22.00 (c)

TECHNOLINE
(24 hr viewdata system)
Tel: 01-450 9764

MAIL ORDER
17 Burnley Road
London NW10 1ED
Telex: 922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill ☺)

West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233
(near Edgware Road ☺)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments.

All prices ex VAT.
Prices are subject
to change without notice.

Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

DISC DRIVES

Full details on page 6.

5.25" Single Drives 40/50 switchable:	
TS400 400K/640K	£114 (b)
PS400 400K/640K with integral mains power supply	£129 (b)
5.25" Dual Drives 0/80 switchable:	
TD800 800K/128OK	£226 (a)
PD800 800K/128OK with integral mains power supply	£229 (a)
PD800P 800K/128OK with integral mainspower supply and monitor stand	£249 (a)
3.5" 80T DS Drives:	
TS351 single 400K/640K	£99 (b)
PS351 single 400K/640K with integral mains power supply	£119 (b)
TD352 Dual 800K/128OK	£170 (b)
PD352 Dual 800K/128OK with integral mains power supply	£187 (b)

DISC DRIVE MULTIPLEXER

Full specification on page 6.

TDM2	
Dual Unit: 2 computers/one drive unit	£75 (b)
TDM4	
Quad Unit: 4 computers/one drive unit	£135 (b)

3M FLOPPY DISCS

5.25" Discs in packs of 10	
744 40T SS DD	£10.00 (d)
745 40T DS DD	£12.00 (d)
746 80T SS DD	£14.50 (d)
747 80T DS DD	£16.00 (d)

(Add £1 for library case packing)

3.5" Discs in packs of 10	
80T SS DD	£20 (d)
80T DS DD	£25 (d)

BULK DISCS

High quality unlabelled discs supplied in packs of 50 in a storage box. The 5.25" discs have the reinforcing hub rings. These discs are guaranteed for life.

50 5.25" 40 T single sided discs in lockable box.	£35 (b)
50 5.25" 80T double sided discs in lockable box.	£45 (b)
50 3.5" 80T double sided discs in lockable box.	£95 (b)

FLOPPICLENE DRIVE HEAD CLEANING KIT

5.25" Kit with 20 disposable discs	£12.50 (d)
3.5" Kit with 20 disposable discs	£14.00 (d)

DISC STORAGE BOXES

DB530 Non Lockable 30 x 5.25"	£6.00 (c)
DB340 Lockable 40 x 3.5"	£8.50 (c)
DB550 Lockable 50 x 5.25"	£9.00 (c)
DB570 Lockable 70 x 5.25"	£11.00 (c)
DB5100 Lockable 100 x 5.25"	£13.00 (c)

MONITORS

BBC lead incl with all monitors

MICROVITEC 14" RGB Monitors

Please specify plastic or metal case.

Microvitec 1431	
Standard Resolution 453 pixels	£179 (a)

Microvitec 1431AP	
As 1431 + composite video and sound input	£199 (a)

Microvitec 1451	
Medium Resolution 653 pixels	£225 (a)

Microvitec 1451AP	
As 1451 + composite video and sound input	£259 (a)

Microvitec 1441	
High Resolution 895 pixels	£365 (a)

Microvitec 20" RGB/PAL/ Audio Monitors

Microvitec 2030CS	
Standard Resolution RGB/Comp Video	£380 (a)

Microvitec 2040CS	
High Resolution RGB/Comp Video	£685 (a)

TOUCHTEC-501

Brings genuine touch screen operation on metal cased Microvitec monitors, incl utilities disc with starter and development programs

PHILIPS 8501	
RGB Standard Resolution	£139 (a)

TAXAN SUPER VISION II

12" Hi Res/Hi Contrast	
Option to switch to green/amber	
BBC/IBM Compatible	£279 (a)

TAXAN SUPER VISION III

12" Super Hi Res and contrast RGB	
Monitor with option to switch to mono	
BBC/IBM compatible.	£319 (a)

MITSUBISHI XC1404

14" Med Res RGB Monitor	
Etched dark screen brilliance and contrast control, BBC/IBM compatible	£219 (a)

12" MONOCHROME MONITORS

TAXAN KX1201G	
Hi Res green etched screen	£90 (a)

TAXAN KX1202G	
Hi Res Long Persistence (P39)	£95 (a)

TAXAN KX1203A	
Hi Res amber etched screen	£95 (a)

PHILIPS BM 7502	
Hi Res green screen	£75 (a)

PHILIPS BM7522	
Hi Res amber screen	£79 (a)

HANTAREX HX12	
	£69 (a)

MONITOR ACCESSORIES

Microvitec Swivel Base (14" plastic monitors)	£20 (c)
Philips Swivel Base	£14 (c)
Monitor Stand Models B & B+	£10 (c)
Monitor Stand Master	£13 (c)
Double Tier stand Models B, B+ or Master	£24 (b)
Taxan RGB Lead	£5 (d)
Microvitec Lead	£3.50 (d)
Monochrome BNC/Phono Lead	£3.50 (d)

RAM/ROM EXPANSION

ATPL Board for Model B. Simple to instal, no soldering. Allows expansion to 15 Roms + 2 8K Rams **£37 (b)**

ATPL Battery backup kit **£18 (b)**

RAMROM 15 for Model B. External board in an attractive case — easy access to sockets. 6502 Processor signals for development work. **£69 (b)**

Low Profile Cartridge Module Module + 1 cartridge **£12 (d)**

Spare Cartridge **£2.50 (d)**

Cartridge rack **£1.50 (d)**

TIME WARP

Real Time Clock. Plugs into the user port, battery back up as standard, includes manual, demo software including a diary/planner application program **£31 (d)**

MODEMS

(All modems are BABT approved)
See page 7 for modem specifications

MIRACLE WS2000V21/23 & BELL stds	£102 (c)
WS2000 Auto Dial Card	£27 (d)
WS2000 Auto Answer Card	£27 (d)
WS2000 SK1 Kit	£5 (d)
WS2000 DSI disc	£10 (d)
WS2000 Data Cable for BBC	£6 (d)

MIRACLE WS4000 V21/23	£149 (b)
------------------------------	-----------------

MIRACLE WS3000 V21/23	£295 (b)
------------------------------	-----------------

MIRACLE WS3000 V22	£495 (b)
---------------------------	-----------------

MIRACLE WS3000 V22 bis	£650 (b)
-------------------------------	-----------------

WS3022 1200/1200 fd	£395 (b)
----------------------------	-----------------

WS3024 2400/2400 fd	£570 (b)
----------------------------	-----------------

BBC Data Cable for WS3000	£7 (d)
---------------------------	--------

GEC DATACHAT Modem V23

1200/75, 75/1200 & 1200/1200 pseudo f.d. line powered, complete with software suitable for connecting to Prestel, Micronet, Telecom Gold and many bbs. **Special offer price** **£39 (b)**

PROGRAMMING ACCESSORIES/SOFTWARE

See page 8 for detailed specification

Compatible with B, B+ and Master

EPROMER II with disc based software and rom image **£99 (b)**

MPROMER **£49 (c)**

META ASSEMBLER **£145 (b)**

PORTAL EPROM EMULATOR 128K **£185 (b)**

PORTAL EPROM EMULATOR 512K **£285 (b)**

TEAM Disassembler **£145 (b)**

EPROM ERASERS

UV1B 6 eproms, safety cutout **£47 (b)**

UV1T 6 eproms, timer, safety cutout **£59 (b)**

CAD/DRAWING PACKAGES

NOVACAD CAD Package for B, B+ & MASTER (See page 9 for specification)

TECHNOMATIC

**17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233**

BASIC Version	£79 (d)
Tracker Ball/Mouse Version (TM)	£99 (d)
TM Version plus Tracker Ball	£129 (c)
TM Version plus Mouse	£115 (c)
Plotter Driver Generator	£28 (d)
MOUSE	
AMX MOUSE with SUPER ART (pse specify B, B+ or Master)	£67 (d)
Super Art	£43 (d)
PAGEMAKER	£39 (d)
3D ZICON	£21 (d)
PAINTPOT	£21 (d)
DATABASE	£21 (d)
RB2 TRACKER BALL	
RB2 Tracker Ball with Icon Master (for B, B+ & Master)	£52 (c)
RB2 Tracker Ball with Cursor Control Rom (for Master only)	£52 (c)
RB2 Tracker Ball 'Stand Alone' for use with NOVACAD & other software)	£47 (c)
Cursor Control Rom for Master	£12.50 (d)
MIRRORSOFT FLEET	
STREET EDITOR incl VAT	£39.50 (d)

SOFTWARE CP/M SOFTWARE

*for Acorn, Torch & Multiform
Z80 Processors*

MICROPRO's Torchstar Professional	£310 (a)
ASHTON TATE's DBASE II	£310 (a)
SUPERCALC II	£195 (a)

*Send for details on our full range of
CP/M & PC DOS packages for
Business, Communications & High
Level Languages.*

BBC SOFTWARE/ FIRMWARE

DATABASE MANAGEMENT SYSTEMS

VIEWSTORE Acorn's database with display in any mode in spreadsheet or user defined card format and powerful sort facilities. Max file size 4Mb	£37 (d)
---	----------------

STARdataBASE A fast machine code, true random access database. Upto 4000 records/file, 69 fields. Fully menu driven, user defined record layout, very fast searches thru keysearch facility. Mailmerging from VIEW and WW.	£49 (d)
---	----------------

MASTERFILE II Highly popular economically priced database. 17 fields per record, file size limited by drive capacity only. (40T or 80T)	£17 (d)
--	----------------

WORD PROCESSORS

VIEW 2.1	£37 (d)
VIEW 3.0 New version of VIEW compatible with B+ complete with a printer driver generator.	£56 (c)
Hi-VIEW Disc based version of VIEW 2.1 for use with 6502 2nd processor allowing upto 47K of memory for text.	£36 (d)

VIEWSPELL Acorn's new rom based spelling checking utility with a 70,000 word dictionary on 80T disc. Additional/specialised dictionaries can be created. Facilities also include wild card search for words.	£29 (d)
VIEW INDEX	£12 (d)
VIEW PRINTER DRIVER GENERATOR A utility to generate a View printer driver to suit any printer. Screen driver allows viewing of text exactly as it will appear on paper.	£9 (d)
DOT PRINT PLUS Full details on page 5 NLQ rom for Epson FX/RX, MX and GLP.	£28 (d)
WORDWISE	£24 (d)
WORDWISE PLUS	£38 (d)
INTERWORD (If you own a WW+ then quote your reg number and pay £39).	£46 (d)
WORDEASE A 16K rom based utility for WW+	£24 (d)
SPELLCHECK III A 16K rom based spellcheck program for View and WW. Contains 2000 words on the rom and 6000 (expandable to 17000) words on a disc.	£31 (d)
EDWORD II	£43 (c)

SPREADSHEETS

VIEWSHEET Acorn's spreadsheet provides 255 cols and 255 rows and will operate in any mode. Fully compatible with VIEW and 6502 2nd processor.	£37 (d)
VIEWPLOT A disc based plotting program. (To be released soon).	£22 (d)
INTERSHEET The new spreadsheet from Computer Concepts with many advanced features like 105 col mode, holding several spreadsheets in memory at a time etc.	£39 (d)

INTERCHART Graphics package for Intersheet	£27 (d)
ULTRACALC BBC Publications very popular and well proven spreadsheet rom includes graphics utility disc.	£52 (d)

QUICKCALC A disc based economically priced spreadsheet package (40 or 80T Disc).	£14.50 (d)
MINI OFFICE II A suite of inexpensive but extensive word processor, database and spreadsheet packages. (40T or 80T)	£14.75 (d)

LANGUAGES

META ASSEMBLER Multi processor Assembler full details on page 8	£145 (c)
TEAM DISASSEMBLER	£145 (b)
ACORN 6502 DEV. PACKAGE A macro assembler with utilities for developing large programs in assy lang. Requires 6502 2nd processor.	£43 (d)
MACROM A very fast full featured macro assembler rom from 6502 and 65C02 codes, allows use of macros from library disc. Assembly can be disc to memory, memory to memory, memory to disc and disc to disc thus allowing very long source code upto the length of disc in use. About 3 times as fast as ADE and 30% more economical in memory.	£33 (d)
ACORN MICRO PROLOG Logic programming language used extensively in the artificial intelligence field. A simple 'front end' is supplied to make syntax more friendly.	£62 (d)

ISO-PASCAL Acorn's full implementation of International Std Pascal on 2x16K roms.	£48 (c)
ISO PASCAL STAND ALONE GENERATOR	£30 (d)
OXFORD PASCAL A fast P-code compiler and stand alone utility (40 or 80T).	£36 (d)
BCPL	£46 (c)
BCPL CALCULATIONS Supports floating point, fixed point and fast integer calculations on BCPL	£17.50 (d)
BCPL STAND ALONE GENERATOR	£39 (d)
ACORN LOGO	£46 (c)
LOGOTRON LOGO	£55 (c)
BBC PUBLICATIONS OPEN LOGO	£59 (c)
ACORN LISP ROM	£39 (d)
ACORN FORTH ROM	£39 (d)
ACORN COMAL ROM	£43 (d)
MICROTEXT A frame based authoring system from NPL for interactive computer tutoring. Disc based	£52 (c)
MICROTEXT PLUS Extended Features incl extra memory, control of external devices etc. Rom based.	£229 (b)

COMMUNICATIONS

TERMULATOR Advanced terminal emulator which includes VT52/100, Tektronics 4010, teletype emulations.	£25 (d)
COMMSTAR A highly popular communication rom suitable for all general purpose applications (specify B or Master)	£28 (d)
COMMUNICATOR A full 80 col VT100 emulation program with easy to follow screen menus.	£49 (d)
DATABEEB A variety of facilities for use with WS2000 Modem	£26 (d)
DS1 DISC Special utilities for use with WS2000	£10 (d)

UTILITIES

ACCELERATOR	£49 (d)
ACORN BASIC EDITOR	£22 (d)
MONITOR (BBC Pub)	£34 (a)
BROM PLUS	£26.50 (d)
SLEUTH	£23 (d)
TOOLKIT PLUS	£31 (d)
TOOLBOX 2 (BBC Pub) Manual Cassette	£9.50 (d) £9 (d)
EXMON II	£23 (d)
HELP II	£25 (d)
ACORN GXR GRAPHICS ROM specify B or B+	£22 (d)
PRINTMASTER	£24 (d)
DUMPMASER supports about 40 printers	£26 (d)
FONTWISE PLUS	£17 (d)
HERSHEY FONT CHARACTER GENERATOR	£18 (d)
ICON MASTER	£29 (d)
BILLBOARD	£18 (d)
STUDIO EIGHT	£19 (d)
MOVIE MAKER Two Roms + Cassette	£26 (d)
CC SPEECH ROM	£28 (d)
CC SPEECH ROM to Text Rom	£34 (d)
ACORN SPEECH ROM	£15 (d)
ADV TELETEXT UTILITIES ROM	£7.95 (d)

TECHNOLINE
(24 hr viewdata system)
Tel: 01-450 9764

MAIL ORDER
17 Burnley Road
London NW10 1ED
Telex: 922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill ☺)

West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233
(near Edgware Road ☺)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments.

All prices ex VAT.
Prices are subject
to change without notice.

Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

BBC PUBLICATIONS EDUCATIONAL SOFTWARE

A series of programs developed in many cases along-side Radio & TV programmes by BBC's Education Department which supplement the classroom studies by moving and colourful displays helping in clear understanding of a variety of subjects. Some packages also include audio cassettes.

PRIMARY EDUCATION

ASTRONOMY:

9-12 years. Phases of moon, eclipses, seasons etc. Includes a game.

Disc £11 (d)

COMPUTERS AT WORK:

The Work Game illustrates two of the most important computer applications: Robotics & IT. Incl. a database prog, word processing tutorial and a robotic control prog.

Aud/EC/disc £16 (c)

PICTURE CRAFT

An inexhaustible, versatile and flexible suite of programs to design shapes & patterns, paint them and convert them into pictures, puzzles and games.

Disc £17 (d)

DRAWSTICK

8 year upwards for creating pictures, charts, maps etc. Pictures created can be used in your own programs. Sufficiently sophisticated for use by adults.

Cass £8 (d)

INTRODUCING GEOGRAPHY

9-13 years. Four exciting graphical adventures include river navigation, flying, mountain climbing and desert crossing.

Disc £16 (d)

MATHS WITH A STORY 1

Four primary level programs incl symmetry, co-ordinates and probability for children of wide ranging abilities.

Cass £8 (d)

MATHS WITH A STORY 2

Similar programs as 1 but covered from a different angle.

Cass £8 (d)

NUMBER GAMES:

6 programs designed to stimulate the mind of an active child of 8 years and upward.

Cass/EC £7.50(d)

USING YOUR COMPUTER

8/12 years. Introduction to computers using synchronised audio techniques. Total of 80mins of audio & 14 progs.

Cass £24 (c)

WORD PLAY

An elegant but simple introduction to word processing using animal shapes for editing functions. Fun manual for the children.

Cass £10 (d)

WORD MOVER

A simple text editor.

Cass £8 (d)

SECONDARY LEARNING

ADVANCED LEVEL

STUDIES: STATISTICS

6 progs covering central concepts and principles. Topics include Discrete Data & Binomial Distribution. Cont. Data & Normal Data Distribution. Hypothesis Testing & Confidence intervals, Central Limit theorem & Estimation, Simulations, Correlations and Regressions.

Disc £23 (d)

ADVANCED STUDIES:

GEOGRAPHY

4 progs covering social geography: Traffic & Town planning, drainage & basin management and planning for industry.

Cass £10 (d)

INSIDE INFORMATION

Designed to introduce IT to young adults. Suitable for use in sec. schools, ITCs & Adult Educ. Centres.

Prog Cass £10 (d)
Audio Cass £5 (d)
Book £8 (d)

OPEN LOGO

Open University Logo incl two 16K roms and two manuals.

£55 (c)

SCIENCE TOPICS (ST)

S.T.: WAVES

A Physics program allows display of waveforms and shows changes caused by different parameters.

Disc £14 (d)

S.T.: RELATIONSHIPS

A Biology program giving a sophisticated simulation exercise based on data from W.H.O.

Disc £14 (d)

S.T.: BONDING

A Chemistry program to reinforce & strengthen the concept of bonding of elements. Transfer and sharing of electrons are both shown graphically.

Disc £14 (d)

S.T.: ELECTROMAGNETIC SPECTRUM

A graphical adventure prog to test your knowledge of the electromagnetic spectrum.

Disc £14 (d)

S.T.: ELECTRONICS IN ACTION

Program about using computers for control. Control is achieved by using 6502 assy lang. Prog editor is supplied.

Disc £14 (d)

S.T.: NEWTON & THE SHUTTLE

A interactive prog in 3 parts covering launch to recapture of a satellite to test the knowledge of Newtonian mech.

Disc £19 (d)

S.T.: ECOLOGY

Simulation program managing a nature reserve to meet a host of individual needs.

Disc/EC £19 (d)

S.T.: POLYMERS

Students run a manufacturing co. and have to choose best materials for their products and compete with a rival co. run by the computer.

Disc/EC £19 (d)

S.T.: CLASSIFICATION & PERIODIC TABLE

A database program for producing different classifications of chemical information and presented in any format.

Disc £20 (d)

S.T.: FOOD & POPULATION

Simulation in space of biological aspects of nutrition and food production logistics.

Disc £20 (d)

SEC. SCIENCE: MICROTECHNOLOGY

Fundamental concepts of electronics Logic & Resistor Tutors, Servo Cct simulation & a cct design program.

Cass £7 (d)

SEC. SCIENCE: THE MOLE CONCEPT

A computer sync. audio program explains definitions of atomic & molecular masses and depicts molar equations.

Disc/Aud/EC £16 (c)

SEC. SC.: UNIFORMLY ACCELERATED MOTION:

Illustrates basic eqns., uniform accln, under gravity and an idea of terminal velocity.

Disc/AUD/EC £16 (d)

VU-TYPE

The popular 'Sight & Sound' touch typing tutor with alterable settings.

Disc/EC £15 (d)

GENERAL

GAME CORE

Provides information and intelligence routines for writing board games.

Cass £9 (d)

VU TYPE PROFESSIONAL

An enhanced and expanded version of Vu Type with 63 Pitman approved exercise.

Disc £19 (d)

WHITE KNIGHT MK II

(Specify if for Master).

Disc £16 (d)

BATTLEFIELDS

Cass £8.50 (d)

DEUTSCH DIREKT

Disc based vocabulary learning prog with audio cassette to help with pronunciation.

Disc/aud/EC £16 (c)
Book £5.95 (d)

A VOUS LA FRANCE

A home study aid for anyone learning French.

Cass/EC £12 (d)
Book £5.25 (d)

Cassette based programs listed above can be supplied on disc at an extra charge of £1.50 per disc and please specify the format required 40 or 80T.

PRINTER ACCESSORIES

EPSON ACCESSORIES:

Interfaces:

8143 RS232.....	£28 (d)
8148 + RS232 + 8K.....	£75 (d)
8165 IEEE + Cable.....	£65 (d)
8148 RS232 + 2K.....	£57 (d)
8132 Apple II.....	£60 (d)
8177P NLQ for FX80 + /FX100 +	£99 (d)
Parallel & Serial Buffers of various size also available.	
FX80/80 + /85 Tractor Attachment.....	£37 (c)
FX80/80 + Paper Roll Holder.....	£17 (c)
LX80 Tractor Feed.....	£20 (d)
LQ800 Tractor Feed.....	£44 (b)
LQ1000 Tractor Feed.....	£49 (b)

SHEET FEEDERS:

8338 LX80.....	£49 (b)
8333 FX100 + /105.....	£169 (a)
8331 FX80 + /85.....	£129 (b)
8330 RX80 +	£129 (b)
LQ800.....	£129 (b)
LQ1000.....	£159 (b)

Ribbons:

RX/FX100/100 + . FX105.....	£10 (d)
RX/FX80/80 + . FX85.....	£5 (d)
LX80.....	£4.50 (d)
LQ800.....	£8.50 (d)
LQ1000.....	£10 (d)
H180 Pen Set (Aqueous/Ball point).....	£7.50 (d)

Dust Covers:

FX80.....	£5.50 (d)
TAXAN/Canon KP810.....	£6 (d)
FX100.....	£7.50 (d) KP910 £7 (d)

HITACHI 672 Plotter

Aqueous Pen Set six pens.....	£18.50 (d)
Oil Based Pen Set six pens.....	£25.00 (d)

TAXAN CANON Accessories:

RS232 + 2K buffer.....	£78 (d)
Ribbon.....	£6 (d)

JUKI 6100

RS232 Interfaces.....	£65 (d)
Tractor Feed.....	£129 (d)
Ribbon (Carbon).....	£2.00 (a)
Spare Daisy Wheel.....	£14 (d)
Sheet Feeder.....	£182 (a)

BROTHER HR15

Daisy Wheel.....	£18 (d)
Tractor Feed.....	£90 (a)
Ribbon (Carbon/Nylon).....	£3.00 (d)
Sheet Feeder.....	£182 (d)
Keyboard.....	£135 (a)

Printer Leads:

BBC Parallel Lead (1.2m).....	£10 (d)
BBC Serial Lead (1.2m).....	£6 (d)

Other lengths can be supplied on order:

IBM Parallel Lead (2m).....	£12 (d)
-----------------------------	---------

PAPER & LABELS

Plain Fanfold paper with micro perforations:

2000 sheets 9 1/4" x 11".....	£13 (b)
2000 sheets 14 1/2" x 11".....	£18.50 (£4.50)

Labels/1000:

Single Row 3 1/4" x 1 7/16".....	£5.25 (d)
Triple Row 2 7/16" x 1 7/16".....	£5 (d)

BBC SPARE PARTS

All Prices are Retail ex-VAT carriage code (d).

BBC & Misc:		74ALS 245.....	£5	74LS10.....	£0.24
Keyboards.....	£52 (b)	88LS120.....	£3.00	74LS123.....	£0.80
Powers Supply.....	£52 (b)	BBC PLUS:		74LS163.....	£0.75
Keyswitch.....	£1.75	PAL16REN.....	£13.50	74LS244.....	£0.80
Video ULA.....	£18	64K x 4 DRAM.....	£8.50	74LS245.....	£1.10
Serial ULA.....	£14	6512A.....	£12.50	74LS373.....	£0.90
DNFS.....	£18	SAA5050.....	£9.00	74LS393.....	£1.00
UHF MOD.....	£4.50	6845SP.....	£6.50		
6502A CPU.....	£6.50	UPD7002.....	£5.00	BBC MASTER:	
65C02 CPU.....	£12	DS3691.....	£3.50	1-Mbit ROM.....	£39
6522 VIA.....	£3.50	7438.....	£0.40	MSI CHROMA	
6522A VIA.....	£5.50	74LS00.....	£0.24	IC.....	£13.50
LM324.....	£0.45	74LS04.....	£0.24	655C12P-2.....	£12.50

TECHNOMATIC

17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

ACW443 CAMBRIDGE WORKSTATION

- A complete self-contained workstation with:
- * NS32016 8MHz Main Processor & 32081 FP processor.
 - * 20 Mbyte Winchester and one 80T Ds floppy drive.
 - * A detachable keyboard Hi Res RGB Monitor.
 - * 4Mbyte of on board Ram as standard.
 - * Languages supplied include: Fortran 77, Pascal, C, Cambridge LISP, 32016 Assembler & 32bit BASIC.
 - * Utilities on the operating system to cross link programs between different languages, utilities for porting programs to mainframes.
 - * Phone for detailed leaflet.

32016 CO-PROCESSOR

A second processor that brings genuine 'Mainframe' power to the BBC Computer.

- * Interfaces with the BBC through the tube connector.
- * NS32016 6MHz CPU & 32081 FP processor.
- * 1Mbyte Ram as standard.
- * Packaged software includes all the languages and utilities supplied with the ACW Work Station.
- * Phone for detailed leaflet.

CPU/FP Upgrade Kit (non-Acorn) for the Co Processor for 8MHz operation to enable use of ADFS with the floppy drives is available. It can be fitted at no extra charge if ordered with the Co Processor.

A list of software available for the 32 bit processors is available on request.

512 CO-PROCESSOR

Brings professional software to the BBC Master.

- * 10 Mhz 80186 *DOS PLUS.
- * GEM Write & GEM Draw.
- * 'WIMP' Environment with high quality Mouse.
- * Runs many 'IBM' programs — even 'Flight Simulator'!
- * Convert to/from IBM/BBC data.

DOTPRINT PLUS

A uniquely versatile NLQ ROM for the BBC Micro.

- * Built-in character font generator.
- * Built-in view printer driver.
- * Supports microspacing for professional justification in View & with disc in Wordwise/Plus.
- * True bold print as well as double width.
- * 12 character pitch as standard.
- * Fully variable pitch and line spacing.
- * Suitable for fully 'EPSON' compatible printers with quad-density graphics.
- * DOTPRINT PLUS for EPSON FX/RX and compatibles.
- * DOTPRINT DUAL for EPSON MX range.

MICROJUSTIFIED TEXT

homes of a ruling class whose right to rule was based on the ownership of land. Large estates produced money; perhaps even more important, they supplied people to fight for their

NORMALLY JUSTIFIED TEXT

homes of a ruling class whose right to rule was based on the ownership of land. Large estates produced money; perhaps even more important, they supplied people to fight for their

Notice how MICROJUSTIFICATION eliminates 'stretched' spaces between words.



For price details see page 1.

Compact

BRITISH BROADCASTING CORPORATION
MASTER SERIES MICROCOMPUTER

THE FAMILY COMPUTER

Now available from stock

This low cost high tech computer has developed specially as a computer for home use.

SPECIFICATION

128K RAM, ADFS Filing system, BBC Basic version 4, MASTER style keyboard, a single 640K 3.5" double sided drive. RGB/Mono Monitor as an optional extra.

Bundled software pack includes:

Desk Top Prog with note pad & calculator, VIEW 3.0, Card Index, & LOGOTRON. A set of exciting games and graphic demos.

IMPORTANT NOTICE

We would like to advise all our customers who purchased the BBC Master Computer from us between January to June 1986 to ensure that the ram batteries are replaced. The replacement kits are available free of charge.

EPSON LQ800/1000

Uses top quality 24 pin dot-matrix technology.

- * Superb 'letter quality' at 67cps.
- * Fast clear draft quality at 200cps.
- * LQ/Draft modes selectable from front panel.
- * Variety of fonts, usable in both draft & LQ modes.
- * Optional 'personality' modules for Diablo and IBM emulation.
- * Optional Font modules.
- * Friction feed.
- * Hi Res bit image graphics with hex density.
- * 7K buffer, both serial and parallel interfaces as standard.

EPSON HI-80

- * A4 with 4 colour precision plotting.
- * Low cost while maintaining precision.
- * Variety of pens available.
- * Ideal for overhead transparencies.
- * Powerful software commands allow complex plots.
- * Superb line/bar/pie charts simply produced.

EPSON EX800

A new addition to the EPSON range provides faster printing speeds to offer versatility in volume printing. This 80 column printer prints at 300 cps in 12 cpi mode, 250 cps in 10 cpi and 50 cps in letter quality mode. Four built in fonts, including two letter quality fonts can be printed in a variety of typestyles. Full graphics facilities are included. Most selection from the front panel. Parallel and serial interfaces and tractor and friction feeds are standard. Four colour printing option available.

NAT. PANASONIC KX P1080


A high performance low cost printer with full character pitch feature 10, 12, 15 & 17 cpi and proportional spacing in both draft and NLQ mode. 80 column, 100 cps draft and 20 cps in NLQ. Parallel interface and Friction and Tractor feeds as standard. Epson Compatible Graphics.

HITACHI 672

- * A3 four colour precision plotter.
- * Serial and parallel ports as standard.
- * Produces 'OHP' transparencies as well as plain paper.
- * 'HP' graphics language or single character commands.

GRAPHICS WORKSTATION

A A3 pen plotter with 0.1mm resolution allows graphs, charts, architectural drawings to be plotted using the 9 predefined plotting instructions or by using a CAD package. The pen mount allows a variety of pen types including drawing pens to be used or the following range of accessories to be fitted.

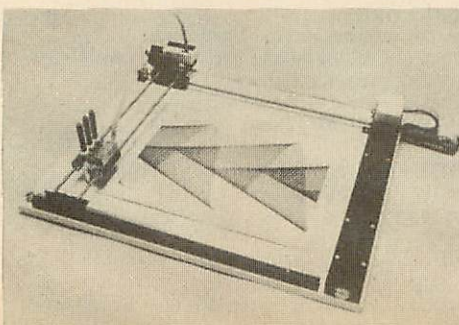

OPTICAL SENSOR

This converts the plotter into an input device and offers a new range of applications: Scan or digitise a picture or a drawing to display or store. Traverse mazes and investigate methods of artificial intelligence. Reliably read bar codes.

DRILL/ROUTER

This will drill holes, machine moulds and cut complex 3-D shapes in a range of suitable materials to a depth of 16mm. Driver software is supplied on disc and an optional application program is available to interface the drill/router to our NOVACAD package.

SCRIBER

The sharp pointed scriber may be used to etch fine line drawings on surfaces such as scraperboard, wax coated copper etc. Full details on request. See page 1 for price.

All accessories available separately if required.

TECHNOLINE
(24 hr viewdata system)
Tel: 01-450 9764

MAIL ORDER
17 Burnley Road
London NW10 1ED
Telex: 922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill ☺)

West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233
(near Edgware Road ☺)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card




Orders welcome from
government depts &
educational establishments.

All prices ex VAT.
Prices are subject
to change without notice.


Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00




TS 400

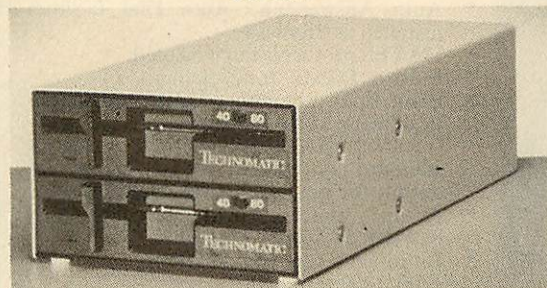

PD 800

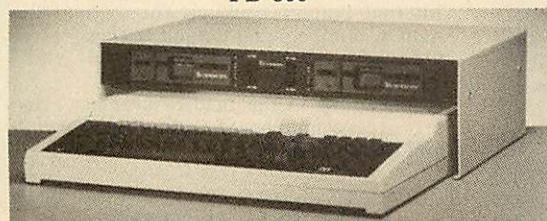

PD 800 P

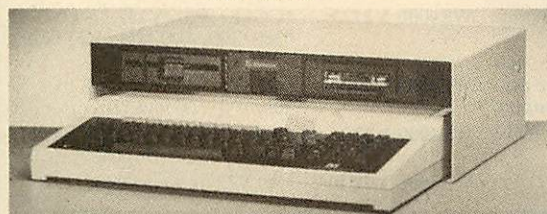

P2041 HT

DISC DRIVES

TECHNOMATIC offers a wide range of high quality, high performance drives to meet all needs of BBC micro users. Please see our detailed and competitive price list on page 2.

*All drives are fitted with high quality slim line ultra low power mechanisms capable of single and double density operation and offering very fast track access and head settling times.

*5.25" floppy drives are fitted with 40/80 track switches as standard at no extra cost. The switches are located in the front and clearly marked to indicate the status at a glance.

*The mechanisms are set inside attractively styled, sturdy metal casings painted in BBC beige colour.

*The plinth version drives provide for a neat and compact system installation giving it a more professional look.

*All drives fitted with all necessary leads and are ready for operation on unpacking. The drives with the mains power supply are supplied with a mains lead fitted with suitably fused 13A moulded plug.

WINCHESTER DRIVES

Mass storage 20 Mbyte drives are available in the following versions:


- * P20HD Stand alone.
- * P204HP With a single floppy housed in a plinth version case.
- * P214TS Top of the range with a 10 Mbyte back up streamer and a single floppy housed in a plinth type casing and supplied with backup utilities.
- * TS10 A stand alone 10Mbyte streamer for those who are already equipped with a Winchester and a floppy drive. Utilities for backup can only be loaded from a floppy.

All models are fully compatible with Acorn's ADFS system and include a mains psu and the necessary cable connections.

**ALL TECHNOMATIC DRIVES NOW
CARRY A TWO YEAR WARRANTY**

DISC DRIVE MULTIPLEXER

The cost-effective alternative to networking! A self-contained unit that enables up to four computers to be connected to one single or dual disc drive. No hardware modifications — simply plugs into the computers disc interface connectors. No ROMs or other software needed. All DFS commands work as normal. The switching of drives between computers is totally automatic and completely invisible to the user. This unit is ideal for installing in classrooms and other situations, where networking is not planned or necessary, or where costs must be kept low. In many cases software needs to be shared, although full networking complexity and cost is not needed. Several of these units can be connected in series to allow more computers to access the same discs, i.e. two quads connected together will allow 7 computers to share 1 drive. Units are supplied with 5' of cable per outlet as standard. Mains powered.

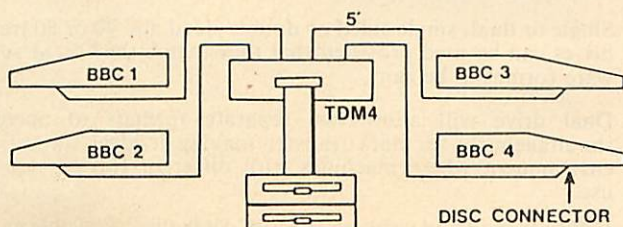

TDM4 Quad Unit (up to 4 computers)

TDM2 Dual Unit (2 computers)

WINCHESTER DRIVE MULTIPLEXER

A unique addition to our hardware range that allows the sharing of a Winchester between a number of computers. The principle of operation is the same as our highly popular disc drive multiplexers and there is no need for any additional software or hardware modifications. The Multiplexers are available in two versions, a dual unit for two computers and a quad unit for four computers to share a Winchester. Multiplexers are particularly useful for accessing common software and transferring data between the computers. (Not recommended for use with random access files).

3M FLOPPY DISCS

Every single 3M Floppy Disc carries a written lifetime guarantee that it will perform reliably. Not only do 3M offer a highest quality product but also a very competitive price. Please see page 2 for details. 3M Floppy Discs are supplied in sturdy storage boxes each containing 10 discs. While offer lasts discs will be supplied at specially reduced prices.

FREE
Clock/calculator
with every 5 boxes
of 3M discs
purchased.



FLOPPICLENE Disc Drive Cleaning Kit

Floppiclene introduces a positive concept in ensuring continuous high performance of the disc drives by providing an easy and efficient method of keeping the drive heads clean. Use of disposable cleaning discs eliminates the risk always present in reusable discs of recontamination and abrasion of the sensitive drive heads. Available for both 5.25" and 3.5" drives. Please see page 2 for prices.

TECHNOMATIC

17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

MODEMS

MIRACLE WS4000

- * A cost effective intelligent modem that offers the best value for money bringing the world of data communication within easy reach.
- * Plain English commands make it simple to use, even for the first time user.
- * Latest Hayes-type protocol commands, auto dial, auto answer, auto speed seeking.
- * Equalisation model in V23 for line-noise filtering.
- * Many other options including upgrading to V22 and V22 bis.

MIRACLE WS2000

- * A comprehensive manually switched 'World Standard' modem.
- * Competitively price with a capability to be upgraded for various options.
- * BT approved for V21/V23, 300/300, 1200/75 and 1200/1200 half duplex.
- * Includes BEL103/113/108 standards for use outside UK.

Optional extras include (Not BT approved).

- * SK1 chip set for computer control.
- * User port cable.
- * Auto dial Board.
- * Auto Answer Board.
- * DS1 disc for auto dial facilities on Commstar.



Miracle have introduced two new models in the WS3000 series for users who require a modem for a specific use. Model WS3022 provides 1200/1200 baud full duplex operation whilst only WS3024 provides 2400/2400 baud fd only.

Please see page 2 for prices

MIRACLE WS3000 RANGE

- * A professional range of intelligent modems with full BABT approval.
- * Auto Answer and Auto Dial facilities installed as standard.
- * HAYES protocols implemented.
- * Pulse or DTMF 'tone' dialing.
- * Plain English command structure simplifies the use of the modem.
- * Integral parallel printer port fitted as standard configurable for both input and output for process control applications.
- * A line sharing facility to differential between data and voice calls.
- * Intelligent speed buffering converts 1200/1200 terminals to 1200/75
- * Equalisation mode for line noise filtering.
- * Internal battery back up for storing 63 names, numbers and default settings.
- * Upgrade path for 1200/1200 and 2400/2400 and security encryption.
- * Applications in the field of graphics and text access, high speed telex, user to user, and user to main frame.

SPECIFICATIONS

- | | |
|------------------------|---|
| WS4000 V2123: | * CCITT V21/V23.
* 300/300, 600 and 1200 half duplex, 1200/75. |
| WS3000 V2123: | * CCITT V21/V23/Bell 103.
* 300/300, 600 and 1200/75 |
| WS3000 V22: | * As V2123 and also 1200/1200 full duplex. |
| WS3000 V22 bis: | * As V22 and also 2400/2400. |

MULTIFORM Z80

A unique Z80 2nd Processor with a 'MULTIFORMAT' capability.

"A wide selection of programs were installed and tested without problems. The task of transferring and installing the programs for the system was greatly eased by the flexibility of the multiformat approach and the implementation of the terminal emulators. Ed Brown Acorn User Oct 86."

- * It is capable of running most CP/M 2.2 format applications programs on the BBC.
- * Connects to the BBC via 1MHz bus, no restriction on the cable length. OS/M operating system on rom.
- * Integral mains psu and 64K on board ram.
- * 28 different formats including Acorn Z80, RML 380Z & 480Z, EPSON QX, Amstrad, Osborne etc, supplied on the library disc with the utility to create additional formats.
- * Emulates the two of the most commonly used CP/M terminals, HAZELTINE 1500 and ADM-3a in addition to the Acorn VDU making installation of most of the software packages easy.
- * Utility to inter convert ASCII text wordprocessed on a standard BBC and under OS/M or CP/M.
- * Multiform is fully compatible with Acorn's 8271 and 1770 DFS on models B, B plus and the Master.



Please see page 1 for prices

- * Single density dfs allows single density CP/M format use. Double density dfs allows both single and double density CP/M formats to be used.
- * Single or dual, single sided or double sided and 40 or 80 track drives can be used provided that they match the CP/M software format to be run.
- * Dual drive will allow two separate formats to operate simultaneously for data transfer making it ideal for use in environment where machines with different formats are in use.
- * Utility to read and write on IBM PC DOS discs available as an optional extra. Utility will also format a PC DOS disc.
- * Multiform Z80 is supplied with a OS/M operating system rom, System disc and a Library disc. Please specify the DFS type and the drive format when ordering.

TECHNOLINE
(24 hr viewdata system)
Tel: 01-450 9764

MAIL ORDER
17 Burnley Road
London NW10 1ED
Telex: 922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill ⊕)

West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233
(near Edgware Road ⊕)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments.

All prices ex VAT.
Prices are subject
to change without notice.

Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

EPROMER III

Eprom Programmer

An enhanced version of the highly successful EPROMER II providing added sophistication to the eprom programming applications on the BBC computer range. The new software also utilises the extra facilities of the BBC Master computer. The programming methods are 'state of the art' of programming technology for fast, efficient and cost effective operation.

The single rail eproms handled by the EPROMER III are:

- 2716 2732 2764 27128 27256 27512 27513
2516 2532 (NMOS & CMOS)
- One time eproms P27XXX, 87CXXX etc.
- Also A suffix eproms such as 27XXXXA

The software is menu driven, many operations being single key. On screen help clarifying the operation being carried out. Will make the programming process very simple and easy for both specialists and novices alike.

The main features of the programming software are:

- * Device, function and voltage selection from the computer keyboard.
- * Continuous display of the options selected.
- * All eproms upto 27512 (64K) programmed in single pass.
- * Automatic Intelligent identifier support for eproms able to respond.
- * Selectable programming voltage 25/21/12.5V
- * 3 programming methods: Normal, Intelligent & Pulse (20 sec for a 27128).
- * Serial port protocols supported.
- * Intel HEX, Motorola S, HEX and ASCII protocols supported.
- * DFS/ADFS and Rom Filing System Supported.
- * BASIC/Machine Code programming using RFS.
- * Powerful editor with input in HEX or ASCII.
- * Block move of data within the address range.
- * User can select any section of the eprom from single byte to the full address range to blank check/burn/verify. Facility to program single bytes makes program development/amendment simpler.
- * Software interface provided for users own application (alternate byte program etc)

EPROMER III interfaces with the BBC through the 1 MHz bus, has a mains integral mains power supply and is fitted with a 3M TEXTTOOL ZIF socket to provide consistent and reliable service for a long period.

META Version III

"All the good features you would expect to find in a good source code editor are present... Meta assembler lives in a different world. It is structured to work with any new processor... as new instruction sets can be added... as needed... has a well featured editor with colour highlighting, a sound modular approach."

Acorn User October 1986

- Assembles for over 30 popular processors, including Z80, 6800/01/02/04/05/09/11 etc — and 68000 — using native mnemonics for each processor, eg. LD A, (HL) for Z80 and MOV AO, \$1000 for 68000 etc.
- Fully integrated Editor: four field, all search, search/replace, block copy, delete, move, marked save, load etc.
- Compatible with Portal Eprom Emulators and Team Disassemblers.
- Send object code in Intel Hex, S-Record, straight binary etc. down to discs, RS232, parallel port, Eprom Emulators etc — all during Assembly.
- Over 50 directives included as standard: handling nestable macros, conditional assembly and twenty types of table definition directives.
- 32 bit labels; 31 character names. Arithmetic and Boolean arithmetic to 32 bits.
- Modular source code with numeric and string parameter passing.
- Serial communicator area with eight options lines: echo, control code trap, LF suppression/addition etc.
- Over 500 in use throughout the world in universities and many different industries.
- Two 16K Roms, two 80 track discs, A4 ring-band manual, function-key strip.

PORTAL EPROM EMULATORS

- Emulates 2716, 2732, 2764, 27128, 27256, 27512 eproms at 150ns Access time.
- Load at 4Kbytes/second — No "erase" time.
- 28 pin header plugs into Eprom socket on target system — status monitored on 13 Leds.
- Fully software controlled from Meta Assembler.
- 100 times faster than standard EPROM program/erase cycle.
- Fully CMOS compatible; draws no power from target system.
- Four portals may be independently programmed off same user-post cable.
- Complete with all cables, manual and disc.

PORTAL 128 (2716, 2732, 2764, 27128):

PORTAL 512 (2716, 2732, 2764, 27128, 27256, 27512).

BOOKS

No VAT Carriage Code (c)

LANGUAGES
6502 Assy Lang Prog.....£19.95
6502 Programming.....£13.95
8086 Book.....£23.95
Acorn BCPL User Guide.....£15.00
Acorn FORTH.....£7.50
Acorn LISP.....£7.50
Acorn ISO Pascal Ref Manual.....£10.00
Intro to COMAL.....£10.00
Intro to LOGO.....£7.50
Micro Prolog Ref Manual.....£10.00
Introduction to Turbo Pascal.....£14.95

Prog the Micro with Pascal.....£8.50
The UNIX Book.....£7.50
Unix User Guide.....£19.95
Understanding Unix.....£18.45

BBC MICRO GUIDE BOOKS

BBC User Guide Acorn.....£15.00
BBC Plus User Guide.....£15.00
Drawing your Own BBC Programs.....£6.95
Inside Information.....£8.95
Math Prog in BBC Basic.....£7.95
Toolbox 2.....£10.95
VIA 6522 Book.....£4.50

PROGRAMMING/UTILITY

Advanced Sideways Ram User Guide.....£9.95
Advanced User Guide (BBC).....£15.95
Advanced User Guide.....£12.50
Applied Ass./Lang on the BBC.....£9.95
BBC Micro Sideways ROM's RAM's.....£9.95
Guide to the BBC ROM.....£9.95
Beginners Guide to W.P.....£7.95
View 3.0 User Guide.....£10.00
Viewstore.....£10.00
Viewsheets.....£10.00
Wordwise Plus.....£9.95

SOUND & GRAPHICS:

Mastering Music.....£6.95
DISC DRIVE SYSTEMS:
Advanced Disc User Guide.....£16.95
Disc Book.....£3.50
Disc Programming Techniques.....£7.95
Disc Systems.....£6.95
File Handling on the BBC.....£6.95
Discovering Disc Drives.....£10.95
APPLICATIONS:
Interfacing Proj for BBC.....£6.95
BBC and Small Business.....£5.75
PROFESSIONAL SOFTWARE
Wordstar made easy.....£16.95

Introduction to Wordstar.....£17.95
Wordstar Handbook.....£11.95
dBase-III for the first time user.....£16.95
Understanding dBase-III.....£22.95
Multiplan Made Easy.....£18.95
Ultimate Complete Guide.....£16.95
ABC of LOTUS 123.....£17.45
1-2-3 for Business.....£16.95
Adv Tech in dBase II/III.....£22.95
Mastering CP/M.....£17.95
CP/M Bible.....£16.50
Introducing CP/M on BBC & Z80.....£9.95
MS/PC DOS Prompt.....£10.95

MICROPROMER

An add on unit for Epromer II enabling the user to program 8741, 8748 and 8749 single chip microcontrollers. Now with the aid of cross assemblers such as META, the user can write code for the above devices and then with the aid of Micro-promer program the device.

- * Simple menu structure with on screen help. i.e. select a function and on the screen will appear details of the function being performed.
- * Comprehensive error reporting and checking.
- * Read, verify, blank check, program from 1 to the maximum byte count for the device being used at any address location.
- * Support for DFS, ADFS and cassette filing systems.
- * Edit data in Hex or ASCII.
- * Total control via software, no switches to worry about.
- * Supplied with user manual and software on diskette.
- * MPROMER simply plugs into the EPROMER II ZIF socket.

TEAM DISSASSEMBLER

The third part of the Universal Development System: a Meta labelling disassembler.

Supports 1802, 8080, 8085, HD64180, Z80, 65XX (includes 65 col, 6511 etc), 68XX (includes 00, 01, 02, 03, 08 etc): updates soon for most of Meta processors.

- Up to 64K of object code translated back into META compatible source code modules: labels automatically inserted on all jump targets, memory references etc.
- Pre-editing stage allows marking of object code areas as byte, string, word, long word etc, tables. These areas disassembled into appropriate directives instead of garbage mnemonics.
- Reconstituted source code ready for immediate re-assembly by META.
- Omniversal search/replace for re-naming arbitrary label names with meaningful ones.

TECHNOLINE
(24 hr viewdata system)
Tel: 01-450 9764

MAIL ORDER
17 Burnley Road
London NW10 1ED
Telex: 922800

RETAIL SHOPS
15 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill ☺)

West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233
(near Edgware Road ☺)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments.

All prices ex VAT.
Prices are subject
to change without notice.
Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

NOVACAD

Computer Aided Draughting for the BBC Micro



"The Novacad system is a thoughtfully designed piece of software requiring a minimum of manual bashing so that real results are possible with just a few hours work."

"Novacad is a professional package, well worth the £90 for the ROM and disc and is expandable to suit your own particular requirements. I would have no reservations if I heard Novacad called, 'the best on the market'." A&B Computing August 1986

A sophisticated CAD package with unique facilities which are generally confined to the professional CAD packages costing thousands of pounds.




NOVACAD is being used in widely differing fields ranging from leading British industries for producing engineering drawings to Accountants' offices for producing flow charts. Architects,

engineers, plumbers, kitchen planners and many other professions requiring easy to use facilities for producing professional quality output are making extensive use of NOVACAD's unique features. NOVACAD is proving to be a invaluable teaching aid in technical schools and colleges simply because of the ease with which it can be used.

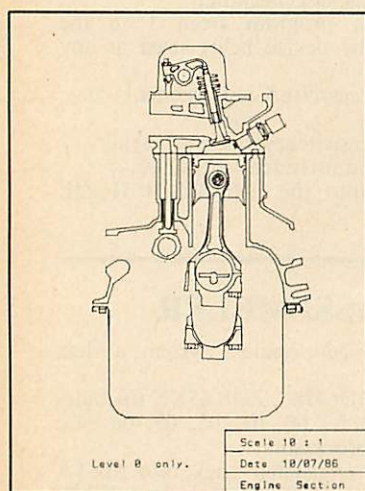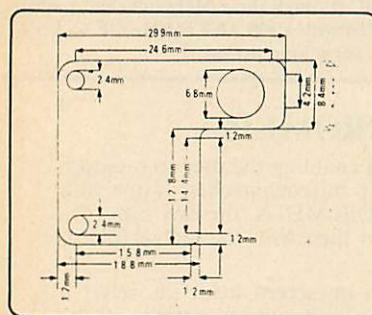

The major features of NOVACAD are:

- * Simple and easy to use with logical command sequence.
- * A large drawing area (approx 15 screens).
- * The ability to create complex icons (upto 500 lines instead of the usual 15 to 20 pixels), store them in a library and recall them at different scales and orientations.
- * A zoom facility allowing magnification of up to 20 times to insert finer details.
- * Block copy of shapes on the screen for repetitive use.
- * Text entry at any 90° orientation at any position on the screen.
- * Create multi layer drawing with 8 levels available.
- * Full compatibility with the BBC range with minimal hardware requirements yet having the capability of exploiting the potential of the extra shadow memory or the second processor's memory and speed.
- * Printer routine for Epson 80 and 136 column printers.
- * A unique facility to output to any BBC compatible plotter.

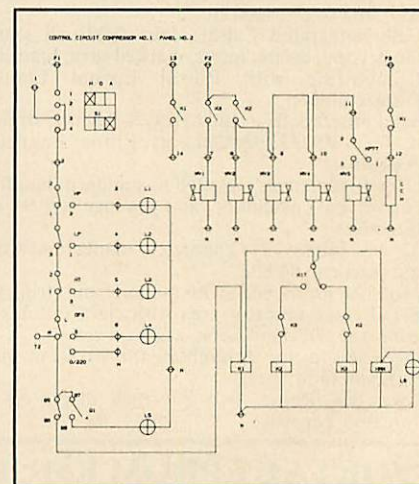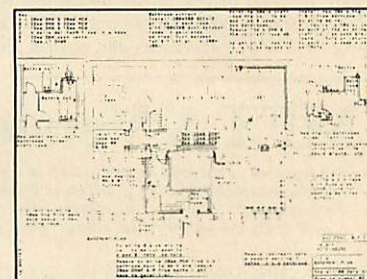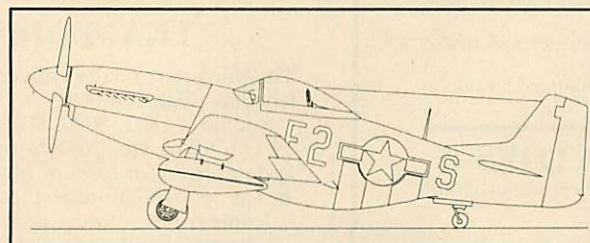

MINIMUM HARDWARE REQUIREMENTS

- Any BBC range computer with Acorn DFS.
- 40 Track single sided single drive.
- Epson compatible dot matrix printer.

With basic BBC B, NOVACAD operates in mode 4 allowing use of any 2 colours. With shadow memory of the BBC+ or the Master, it can also operate in mode 0 for higher resolution or mode 1 for allowing use of any 4 colours, and it will provide additional user memory for more complex drawings.

6502 second processor or the Turbo on the Master will also increase the drawing speed considerably.

NOVACAD is available in two versions

- *BASIC version for cursor control from the keyboard.
- *T/M version for cursor control from the keyboard, Tracker Ball or a Mouse.

OPTIONAL EXTRAS

Plotter driver generator is available as an optional extra to configure a plotter routine for any BBC compatible plotter. Pre-configured programs for the popular plotters like Epson HI 80, Hitachi 672, Plotmate, Penman and HP GL. This program allows the drawing to be scaled to the maximum plotter size thus enabling drawing of A2 and A3 sizes to be produced with equal ease. The zoom facility will enable inaccuracies of drawing on the screen to be eliminated.

ROUTCAD, an optional software package for our Graphics Workstation allows for production of shapes drawn using NOVACAD in 3D on suitable material and is ideal for a range of applications including template making and model building.

NOVACAD package includes a 16K ROM, Utility disc and a comprehensive manual.

LETTERS

Write to Letters, Acorn User, 141-143 Drury Lane, London WC2B 5TF

JUST ANOTHER MINORITY GROUP

Sir, You asked to hear from women, but did not say what you wanted to hear. My collection of *AU* only goes back until the date I bought a Master.

You mention the male domination of computing. I find this no more off-putting than the domination of certain areas of computing by other groups to which I do not belong, such as arcade games players and teachers.

I have been computing at home for four years and at work for three and a half. I use my home computers for word-processing and adventure games mostly. I am pleased with the Master except for the major fault with the batteries. I find plenty of interest in *Acorn User* - only getting stuck occasionally by lack of experience.

I am waiting for the internal modems and large adventure games to arrive for the new computer. I still have to buy Spectrum tapes to get good new games. So what else was it you wanted to know?

Sheila M Thomas
Cambridgeshire

WOMEN ARE NOT DIFFERENT

Sir, With regard to your plea (September) to the silent majority, women. There are plenty of us reading your magazine with enjoyment, but there's little need to treat us differently. It was I who bought the computer, disc drive and printer. I do some programming (and play a few games). I taught my husband wordprocessing. And I'm the one who buys your magazine, and enjoys it!

A S Clark
Somerset



Master Compact: wrong price and lacks cassette outlet

THE PRICE ISN'T RIGHT

Sir, With reference to the Master Compact: as the saying goes, nice micro, shame about the price. How do Acorn do it? They release a new micro, a good one at that, and then price it out of the mass market.

Can they justify the price of the basic Compact + disc drive when you can buy an Amstrad + disc drive + colour monitor for very close to the same price? The Compact with disc and monitor comes in at about £200 dearer than the Amstrad. If you were in the market for a computer which would you buy?

I appreciate the Compact's built-in software, but does the general public? Don't get me wrong - I am a confirmed Acorn user. I have an Electron, Plus 1 etc, and the pricing policy on that was way out of line with market trends. I bought mine when it dropped to £129 but I have heard of it going for £49.

The Electron could have been for Acorn what they want the Compact to be. It is amazing that it is still going strong, as the

support from Acorn has been deplorable. I remember the ads for it stating that it would eventually be upgradable to a BBC B. Apart from third party add-ons, all that Acorn have supplied are a joystick, printer, ROM interface (Plus 1) and disc drive (Plus 3). Where was their teletext mode 7 adaptor, hardware sideways scrolling, user port, 1MHz bus?

I was moved to write this letter because I hope that the same fate does not befall the Compact. Unless Acorn get their pricing policy sorted out, their days as a computer manufacturer are numbered.

J A Nunn
Hampton, Middx

SEARCH FOR A STAR

Sir, I am interested in astrology but have not been able to trace any relevant software on the subject. Can you help?

Heather Smith
Ayr

We've never come across anything along those lines. Over to you, readers!

COMPACT COMPATIBILITY

Sir, If, as stated in the review in your October issue, the Master Compact lacks a cassette outlet, then that is most unfortunate.

Of course no one in their senses would want to use tape for ordinary purposes, but tape is still the only common medium for various Acorn machines which are basically compatible but may have disc drives of different formats connected to them, or may be fitted with different and incompatible DFSs. In the absence of a tape outlet, there is no easy way the owner of a Master Compact will be able to exchange programs or data files with owners of other Acorn models unless they happen to have a 3.5in disc drive and compatible DFS.

Ruben Hadekel
London

There is no cassette port on the Compact, but we believe it will be possible to add one. Keep your eyes on the news pages and advertisements.

Advanced Computer Products claims that the Advanced 1770 DFS is Compact, BBC micro and Master compatible, and several dealers are now stocking disc cables to link 5.25in drives to the Compact. This set-up would allow you to run BBC B discs.

Also, in January David Atherton will explain how to transfer software between the Compact and other BBC micros using the RS232 port.

Readers who need a user port on the Compact should contact Resource, who market an add-on cable to allow use of devices such as the Concept Keyboard and turtles. Resource is at Exeter Road, Doncaster DN2 4PY. Tel: (0302) 63800.

MEP LIVES ON IN ESSEX

Sir, 'Hope for the future of MEP centres' (October) suggests that the Eastern Region has passed into oblivion. No so! When no further funding was available the Inspectors/Advisers of the eight LEAs (Norfolk, Suffolk, Essex, Havering, Redbridge, Waltham Forest, Newham and Barking and Dagenham) agreed to keep the Region active as a consortium of advisory staff. As the former Regional Director I have remained a focal point for the activities of the Region and its postbox.

We still hope that MESU will see the wisdom of supporting our voluntary efforts. We keep our links with other MEP centres and welcome further co-operation.

David Want
Essex Institute of
Higher Education

MORE COMPACT COMPLAINTS

Sir, I was pleased to see your reviewer Steve Mansfield taking a swipe at Acorn for not including essential manuals with the Master and being late with the Advanced Reference Manual. But neither your review of the Compact nor Acorn's advertisement gives any indication as to what manuals (if any) are thrown in with this computer.

You also follow Acorn in quoting VAT-less prices. For a computer aimed specifically at the home this is indefensible. The comparison with Amstrad's PCW 8256, which is mainly a business computer, is irrelevant.

I am tempted to guess that the true cost of the basic Compact will be more than £500 once manuals and VAT are added. I cannot understand how it can be said to be £250 cheaper. If the disc drive is worth £100 the

difference is only £140. And what about the 100 titles available at launch? Presumably 'available' has its usual Acorn meaning of 'perhaps available in three months' time if you are lucky'?

On another subject, *ViewPlot* was advertised as long ago as last November. Where is it? You seem to imply that *Overview* (which contains *ViewPlot*) is available. Is it?

Finally, perhaps you could ask Computer Concepts why they do not point out that neither *InterWord* nor *InterSheet* works on a 6502 second processor. Their adverts omit this essential information. Surely their 32k ROM could have been split into a language ROM and a service ROM, whereupon only 16k of code would be copied into the second processor? And what about *InterBase* and *InterChart*? Software of this sophistication needs all the memory and speed it can get.

Anon

We unfortunately lost the name and address of this correspondent but felt the letter well worth including.

The Compact manuals are: User Guide (also covers ABC), Logotron Logo Guide, *View* quick reference chart and *View/ViewSheet* keystrip. The standard of documentation is as poor as for the Master.

Cost comparisons are fraught with dangers (we can't remember how £250 came about either), so we'll leave that to the reader. What we will say is that the Compact is a very neat, well-produced, friendly and usable computer – a combination that you will not regret spending your money on.

If anyone did manage to buy a Compact disc in September they deserve a medal. We've had lots of phone calls from readers who couldn't.

ViewPlot has been advertised and *Overview* should be

around. It's crazy, but Acornsoft doesn't appear to be trying to sell these products.

Charles Moir at Computer Concepts explained: 'Acorn did not design the second processor system to work with 32k ROMs. If we were to "bodge" it, which could theoretically be done, it would be slow – with *InterWord* impossibly so – and would increase the size of the code. It would have been nice to have the *Inter* range work on the second processor, but it wasn't really on.'


The adverts don't specifically point out the second processor incompatibility, but they do say what the *Inter* series does work with. Also shadow RAM boards go a long way towards solving memory problems. For a full review of *InterWord*, see pages 154–160 of the November issue of *Acorn User*.

DUMPING ON THE BROTHER

Sir, There must be many of your readers who have opted for the Brother HR5 thermal printer because of its low cost. The machine works well enough for text but problems are usually encountered with screen dumps. The normal Epson code works on the basis that the printer head moves down in 1/72in units and sends code to move the head by eight such units. Unfortunately the Brother works in 1/36in units and is therefore moved down by two line depths instead of one, leaving blank horizontal lines in the print-out. Your screen dump by Martin Phillips (Hints and Tips, September '86) is easily modified so that it works perfectly on the HR5. The following change should be made to listing 5 and 6:

430 LDA #4

The checksum in line 1290 should then be 17935 for listing 5 (modes 1,2,4,5) and 17999 for listing 6 (mode 0).

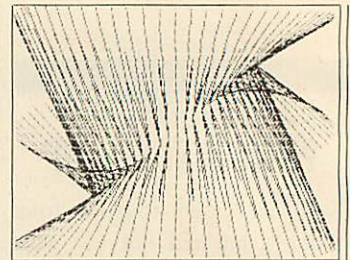

Dumping on the Brother HR5

The two dumps will then function as described in the article and add a much needed facility to this good machine.

K Palfreyman
S Yorks

CARTRIDGE CARPING

Sir, I was enraged by Acorn's comment (Letters, October) that people don't use cartridges properly. I have just spent 30 minutes struggling to inset the Novacad and AMX ROMs into a cartridge and the cartridge into its socket. I have eventually succeeded but can use only one of the sockets because the edge of the sprung lid of the socket does not lie flush with the bar holding it, but sticks out.

Since ROMs vary slightly in size (and who should be surprised in view of the number of countries making them?), it's a disaster when you try to fit a slightly protruding ROM in its cartridge, into a socket that is smaller than it should be because of poor design or manufacture.

And what about getting them out of the cartridges? Certainly you can lever them out with a screwdriver but each time you do so, a dent is left on the elegantly styled (and functionally useless) lower edge of the cartridge case. Does Acorn seriously think I can afford half a dozen cartridges to keep my increasing number of ROMs in permanently? Watford, where are you? I miss my ZIF socket.

Dawn Walker
Wellington

SECOND THOUGHTS

Sir, I am always surprised by the high quality and originality of programs in *Acorn User*. However, I have noticed that some programs originally classified as not compatible with the 6502 second processor may need only a small alteration to overcome this. There are some simple guidelines which would make a greater proportion of programs compatible.

The main problem is that screen memory is no longer directly 'pokeable' over the Tube. This is not such a problem with loading or saving screens. All that is needed is to precede the *LOAD and *SAVE parameters with FFFF to signify that it is the BBC's memory being accessed, not the second processor's. For example, to save a mode 1 screen the following command is used:

```
*SAVE screen FFFF3000
      FFFF8000
```

To poke or peek a location in the BBC's memory, the following routines may be used:

```
10 REM 6502SP Peek and P
oke
20 REM by Ian Gibson
30 DIM X% 20
40 Y%=X% DIV 256
50 osword=&FFF1
60 REM your program here
70 :
80 END
90 :
100 DEF FNpeek(addr%)
110 !X%=addr%
120 A%=5
130 CALL osword
140 =X%?4
150 DEF PROCpoke(addr%,da
ta%)
160 !X%=addr%
170 X%?4=data%
180 A%=6
190 CALL osword
200 ENDPROC
```

Thus, many problems in compatibility may be overcome. These routines work on a BBC without second processor, and they are easy to convert to machine code. Obviously, it is not practical to do this to all programs, especially games which poke screen memory at high speed. However many

programs can benefit from the increased speed and memory which the 6502 second processor has to offer.

I recently converted the *Acorn User* Pixel Editor to run with the Tubelink program over the Tube. It gave a more responsive edge to the program as well as increasing room for individual expansion.

Ian S Gibson
Maidstone

INTER-ESTING INFORMATION

Sir, BBC owners who have purchased the new word-processor ROM, *InterWord* from Computer Concepts, may



InterWord: first impressions

be interested to know that files saved with Gemini's *Office Mate* disc-based wordprocessor may be loaded without problems. Some garbage needs to be edited out but this is easily accomplished using the marked sections routine.

Early impressions using *InterWord* are most favourable although it is necessary to upgrade the standard BBC with a Shadow RAM card such as the Aries B32 board if documents of any size are needed.

E B Page
Alloa

CALLIGRAPHICS ON THE LX-80

Sir, I have been using Mike Turner's Calligraphy program (*AU*, September) with an Epson LX-80 printer. It works well for the

listing printed in the magazine but to get the enhanced version on the *AU* listings disc to work, several lines must be deleted, ie: 1720, 1730, 1790, 1800, 1810, 1820, 1830, 1890 and 1900.

Also, line 390 should be altered to VDU1,27,1,51,1,12; and in line 1780 change the "T" to "&".

Valerie Britton
Bristol

PROGRAMMING IN GCSE

Sir, The letter from Joe Telford in the October issue gives a misleading impression of what is expected to occur in the GCSE Computer Studies classroom.

It is true that, for examination projects, the emphasis is on the realistic use of computers rather than trivial programming exercises, but in order to make a sensible choice of method of solution, candidates must have first hand experience of the various alternatives. These range from the use of an application package, through the incorporation of library routines and procedures into the candidate's program, to a program written entirely by the candidate. Consequently, as part of the teaching, pupils would be expected to acquire skills in each of these areas.

It is not true that the new Information Technology courses are 'taking over' the previous role of Computer Studies in accepting 'the role of programming as a necessary part of problem-solving'. Computer Studies certainly still recognises this role of programming, but not that every solution to every problem must necessarily be programmed from scratch. The essential distinction between modular IT syllabuses and Computer Studies syllabuses at GCSE level is that the former are skills-based and assess each practical activity separately, whereas the latter assess practical achievement

by means of one major project (though marked at various stages in its development). There are, of course, some IT syllabuses which do not include programming at all.

Programming activities in other subject areas are usually small-scale and to serve an immediate purpose. This is different from the wider applicability and longer term relevance of the computerised solutions expected of a Computer Studies student.

Alan R Hunter
Head of Computing
Marton Sixth Form College
Middlesbrough

SWITCHING THE OS

Sir, A friend of mine has a BBC model B+ computer and was experiencing the same sort of software incompatibility problems as some other readers have. Typical problems included *Castle Quest*, where the graphics were all mixed up, and *Repton 2* - which seemed fine until an egg was dropped. When this egg hatched the program would always crash.

The solution was to replace the operating system of the B+ with the OS1.2 for the model B. With this change all was well.

Of course some OS commands (eg *SHADOW) no longer work (unless the proper OS is replaced), but at least the games work correctly.

In fact what was finally done was to build a small pcb to hold both operating systems, with a manual switch mounted at the rear of the computer, so that either OS could be used (selected before power-up).

I don't know if this method will work for all problem software or even for different issues of the B+ main circuit board; perhaps someone could try testing this out.

I D Twydell
Middlesex

LETTERS

I NEED A NEW HEAD

Sir, My problem concerns my printer. I have a Kanto Denshi Coporation FT-5001 and the head has broken. I have examined it carefully and the two lower pins have snapped, rendering them useless. So, I require a new head. I have telephoned my dealer but in the two and a half years since I got it the importers have ceased trading and after two weeks he has still not discovered another supplier, but I suspect his heart isn't really in it.

So my question is: where can I obtain a new head for my printer?

The head has the usual nine pins (no NLQ) and is of the sort where the ribbon cartridge travels along with the head. The mechanism is apparently based on one of the Panasonic models, but I have no idea which one. The head connects to the printer with a flat flexible cable which is permanently fastened to the head, with a removable connector where it joins the printer base. The head is 40mm wide, 20mm deep and 50mm high,

with the inscription 'CAUTION HOT SURFACE AVOID CONTACT' on a label. The only other distinguishing feature on the printer is a label saying 'Logitec GmbH', presumably a German company.

I hope this is sufficient information for you to come up with an answer.

Tony Cains
Stockton-on-Tees

We haven't been able to locate a supplier for the Kanti Denshi Corp printer. Can any reader offer any help? In the meantime, you should keep your eyes on our Free Ads page, in case one comes up for sale (for spares).

GET ON BOARD

Sir, I have just started to buy your magazine, and I'm thoroughly impressed with the quality of the articles and programs. It is certainly one of the best magazines available for the BBC micro and Electron.

I started a bulletin board back

in February, running on a BBC micro, which has given me hours of pleasure.

Name : Techno Fresh Sytems

Hours : 24 hours

Phone : 0570-423082

Speed : 300/300 only

Sysop : Llew Dickinson

The board has software reviews, as well as loads of software for BBC users to download into their computers.

If anybody does call, please leave a message or two!

Llew Dickinson
Lampeter

TERMINAL PROBLEM

Sir, I am writing to ask about the use of a BBC micro as a terminal. At Bath University BBCs are used as on-line terminals connected through the RS423 port. A ROM called the Bath Terminal Emulator and another named the Extended Programmable Interface Connector (EPIC) enable the micro to be used as a terminal. We have managed to insert characters into the keyboard buffer remotely by sending the re-

levant FX call to the processor. Similarly we have managed to simulate all * commands and VDU commands.

We are now trying to use the BBC Basic ROM remotely so that we can run a file held in the mainframe computer. As far as I can see, we can run a program but I don't know how to recover the results.

Is it possible to sense what the BBC is doing through the RS423? It seems a shame that the BBC chip is idle.

(Signature illegible)
Glastonbury, Somerset

Basically, what you are trying to do is to look into the BBC and pull out the results. This is impossible! The only way you are going to get the information back is to get the remote BBC to send it to you. After all you wouldn't expect to look down a telephone line and get pages from Micronet; you rely on Micronet to send them to you.

Torch has however done more work on this. Torch Computers, Cibyn Industrial Estate, Caernarfon, Gwynedd LL55 2BDD.

POST A PROBLEM

AS a result of pressure from readers, *Acorn User* now guarantees a fast reply service for enquiries. Your answer will be returned within 10 working days for just £2 (includes VAT), or your money back.

The idea is simple. Just write out your problem, fill in the coupon (right), and send both off to *Acorn User* with a stamped addressed envelope and cheque or postal order for £2. (If you want recorded delivery, add the cost of this on. The same goes for overseas readers.) Include as much detail as possible and a disc or cassette if a program is involved - with enough space to record any corrected listing.

We will then answer the problem and return all material received - within a guaranteed 10 working days from receipt. If we fail to match this promise your cheque or postal order will be returned with the answered question. If we cannot answer the problem, the cheque will be sent back to you.

If you want advice on hardware or software, or a list of addresses, send us your problems.

ACORN USER READER SERVICE
141-143 Drury Lane, London WC2B 5TF

NAME _____

ADDRESS _____

POSTCODE _____

Daytime phone number _____

I enclose a cheque/postal order for £2 and an sae with my problem.

OFFICE USE ONLY Date in:

Date out:

Answered by:

FLOATING POINT IN ASSEMBLY

Sir, Please could you tell me how to use floating point calculations in assembly language. I can write simple programs but the problem arises while trying to convert Basic to assembly. My first encounter was while converting the mapping routine on your excellent Freehand art package. The trouble is that it runs very slowly. Could somebody explain the assembly floating points or give a listing of the assembly routine for mapping and copying?

Damon Futter
Wiltshire

There are now good texts on floating point machine code, although you can get the theory from a good A-Level maths book and apply this. Your best bet might be to make use of the Basic ROM routines detailed in *The Basic ROM User Guide* by Mark Plumley, published by Adder Publishing in Cambridge.

MASTER PLAN FOR 40/80 DRIVES

Sir, I am writing in reply to Andrew Megginson's letter (October) about problems running dual format discs with the Master 128.

I have 40/80 track switchable drives and have encountered problems trying to load Acornsoft 40 track DFS discs with the drives in 40 track mode. I was just about to unpack my cassette recorder when I decided to switch my drives into 80 track mode and use the command *DRIVE 0 40 which converts drive 0 into 40 track mode via software. To my delight all the discs worked the first time.

Many Acornsoft discs have a utility to convert them from 40 to 80 track format. Before using this utility it is best to select 40

track mode for Drive 0 using the above command, format a blank disc and transfer the original to it by using the command *COPY 0 0 *.*. This method is far more reliable than using BACKUP or the utility on the disc itself, and if anything does go wrong you still have the original disc in perfect condition.

Making security copies of 40 track ADFS discs is not as easy, as the various utilities provided would be different to follow for those not used to this filing system. If using switchable drives ensure that the drive is in 80 track format before converting the disc to 80 tracks. If the drive is in 40 track mode during the conversion the disc may become unreadable.

Stuart Birkett
Devon

SOFTWARE FOR SURVEYORS?

Sir, We are a firm of Chartered Building Surveyors who are regularly required to carry out long and repetitive calculations on the size and deflection of steel and timber beams. We have a BBC B micro and would like to realise its potential in this connection.

We have endeavoured to find some software which might be of use but have been unsuccessful. Please can you put us in contact with a company which produces or may produce a software package which would be suitable.

Peter Thatcher
Michael J Daniels
Wokingham, Berks

We don't know of any: perhaps someone can help?

PROGRAMMING PROJECT

Sir, As a serious BBC micro owner I've mastered both Basic and machine code. I can boast to knowing the machine virtually

inside out. Despite this, I've never completed any worthwhile programming project - the sort of thing that gets published in the pages of your magazine or sold to a software house.

I find one of the main problems is getting enough motivation together to keep at it for the three months or so necessary to produce a number one hit.

This has given me an idea for setting up a new user group for the BBC micro.

I hope to get together a group of programmers to combine expertise and perhaps work on joint programming projects, sharing the work load involved. If your readers are at all interested then I ask them to write to me for more details.

Paul Phillips
13 Mountain Road
Conwy
Gwynedd
LL32 8PU

TWO-WORD WORDGRID?

Sir, Joe Telford's listing to create your own wordsearch puzzles (listing 2, July '86) appears to have an error in it. If you try to create a wordsearch puzzle with only two words then the program crashes and the error 'Subscript at 3590' appears.

If line 3910 is altered from:
3910 IF words%<2
PRINT\$ "Bad
wordlist!":PROCdelay:END
PROC

to:
3910 IF words<=2
PRINT\$ "Bad
wordlist!":PROCdelay:
ENDPROC
then the problem is solved.

L Bamford
Stockport

The fix works fine, but why use word grid puzzles with only two words? Joe's programs were designed to do any serious sorting.

CONTROL CODES FOR THE COPAL

Sirs, I am replying to Tom Oswald's letter (September) with a mode 0 screen dump for a Copal 1000 printer.

I too am frustrated about the control codes of the Copal being different from those of the

```
10 REM Mode 0 dump
20 REM by Tom Weber
30 REM for BBC B/B+/M/C
/E with Copal 1000
40 REM (c) Acorn User D
ecember 1986
50 :
60 MODE 0
70 DIM X% 80
80 INPUT "Name: "n$
90 $X%="LOAD "+n$+" 300
0"
100 Y%=X% DIV 256:CALL &
FFF7
110 PROCdump
120 END
130 :
140 DEF PROCdump
150 *FX 3,10
160 VDU 27,65,8
170 FOR C%=&3000 TO &327
B STEP 8
180 VDU 27,75,0,2
190 FOR A%=C%+&4D80 TO C
% STEP -640
200 FOR B%=A%+7 TO A% ST
EP -1
210 VDU ?B%,?B%
220 NEXT: NEXT
230 PRINT
240 NEXT
250 *FX3,0
260 ENDPROC
```

Mode 0 dump for Copal 1000

Epson. Also the printer lacks quite a lot of other capabilities like user definable characters, NLQ or even just italics.

In my opinion, for the same money you can buy a printer that is a lot more versatile than this one.

About your magazine, I find it rather enjoyable, although I must say that I would prefer a few more serious articles than always just having programs that enable me to print in double height.

Finally, is there somebody out here in Germany who would like to swap information and programs with me? After all, not many have got the Beeb over here. My address is: Saldernstrasse 22, 3000 Hannover 71, Germany.

Tom Weber
Germany

Kirk

ACORN USER DECEMBER 1986

HINTS & TIPS

A way for printing on screen and calculating prime numbers are among this month's offering from Martin Phillips

DOING THE SPLITS

Many programs require text to be printed out on the screen. This is quite easy to program using the Print statement:

```
10 PRINT "This is the first line of text."
```

```
20 PRINT "This is the next line."
```

This is the quickest way of putting text on the screen. A problem can occur when wanting to change the first few lines of a long passage of text, such as the instructions at the start of a program. Often this means changing all the Print statements, and I suspect that most readers faced with such changes in the past must have wondered whether there was an easier way.

It is useful to have a routine that will read data statements and then print them out on the screen, taking care to start a new line only when there is a space or a hyphen. Such a routine makes use of the LEFT\$ and MID\$ statements, and as such can be rather confusing. Therefore let's look at the procedure step by step:

1. Decide on the width of print (w).
2. Read a data string into a string variable (text\$).
3. Split the string up into smaller chunks that will fit into the given width. The split must occur at a space or a hyphen. A problem can occur if there is no convenient place to split. In this case a hyphen must be inserted and an artificial split made.
4. Print each chunk of the text.
5. Repeat with the next data string.

Lines 60 and 80 of listing 1 show how a string of data is put into the string variable text\$. Splitting this string up into lengths of, say, 30 characters is not easy. This is done by setting a pointer 30 places along the string and working back until a hyphen or a space is found. Lines 150 and 170 perform this function.

The pointer is set to position 32. It is immediately reduced to 31 by the $N\% = N\% - 1$ part of line 150. If position 31 is a space then the first chunk will be 30 characters long, which is what we want. The actual position where a space is found is given by the variable N%. Then comes the task of splitting up text\$ to remove the first N% characters. Line 190 prints the

```
10 REM Hints & Tips -
listing 1
20 REM by Martin Phillips
30 REM for BBC B/B+/M
/E
40 REM (c) Acorn User
December 1986
50 :
60 READ text$
70 PROCformat(5,30)
80 READ text$
90 PROCformat(10,20)
100 END
110 :
120 DEF PROCformat(x%,
w%)
130 IF LEN(text$) <= w%
THEN GOTO 220
140 N% = w% + 2
150 REPEAT
160 N% = N% - 1
170 UNTIL MID$(text$, N
%, 1) = " " OR MID$(text$, N
%, 1) = "-" OR N% < 1
180 IF N% = 0 THEN text$
= LEFT$(text$, w% - 1) + "-" + M
ID$(text$, w%): GOTO 130
190 PRINT TAB(x%); LEFT$
(text$, N%)
200 text$ = MID$(text$, N
% + 1)
210 GOTO 130
220 PRINT TAB(x%) text$
230 ENDPROC
240 :
250 DATA "These instru
ctions should be ignored
. They have no relevance
to anything else you mi
ght need here. They do s
how, however, the automa
tic word formatting rout
ine that I am so proud o
f."
260 DATA "ABCDEFGHIJKL
MNOPQRSTUVWXYZabcde
fghijklmnopqrstuvwxyz12345678
90"
```

Listing 1. Formatted and unjustified text

first N% characters of text\$, and line 200 removes those characters, plus the space, from the string. The process is repeated until all the string has been printed. If the routine cannot find a convenient space to split the string, then a hyphen is inserted.

It is a shame that there is no Basic command to insert a character into the

middle of a string. Line 180 shows how this has to be done. LEFT\$ splits off the left-hand 29 characters, then a hyphen is added (this makes the thirtieth character) and finally the MID\$ without the third parameter adds the rest of the text, starting with what was the thirtieth character.

Finally, there needs to be a test to see whether there is more text to split up or whether the rest will fit on one line. Line

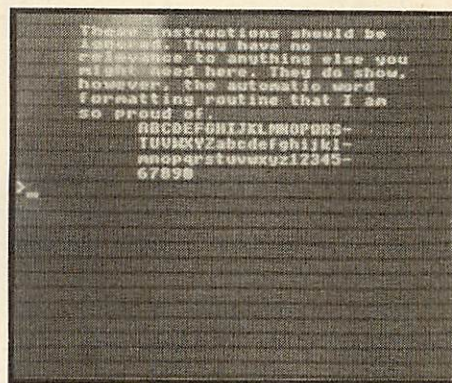


Figure 1. Formatted text from listing 1

130 does this, and line 220 prints that last line. Putting the test here does trap a data statement where the whole text will fit onto one line, otherwise the routine would still split the last word from the text and print that on the next line.

To make the routine more versatile, the two parameters for the format procedure give the left-hand indent and the width of text. As these are used in a procedure there is no checking to make sure that they are sensible. Setting the width to one produced a beautiful line in hyphens! Experiment with listing 1 to see how the text can be moved about the screen.

It was while I was writing a routine to justify the text and getting bogged down with MID\$ and LEFT\$ that I thought there might be a neater way of manipulating such strings. The seldom used, but tremendously versatile string indirection operator might just be able to perform this task more elegantly. The string indirection operator actually stores a string in a memory location, and the variable associated with it gives the starting point of the string. The end point of the string is marked by a carriage return (code 13) and operates in the following way:

```
10 DIM string 50
```


HINTS & TIPS

20 \$string="Acorn User"
30 PRINT \$string
Line 10 is used to dimension space for the operator. You could put the string in a specific location if so desired:

10 string=&900
will put the string into memory starting at location &900. The starting location could now be changed:

40 string=string+6
50 PRINT \$string
Now the program will print just 'User'. To do this with the normal string handling statements you need to say:

10 string\$="Acorn User"
20 PRINT \$string
30 string\$=MID\$(string\$,6)
40 PRINT \$string

or alternatively:

30 PRINT MID\$(string\$,6)
You will have noticed that the \$ sign is put first. This is to differentiate it from a normal string operator. String indirection operators can be used in much the same way as ordinary strings.

Listing 2 is very similar to listing 1, but avoids much of the use of the Basic string handling commands LEFT\$ and MID\$. Such a routine is also easier to convert to assembly language if speed is important. Line 210 removes any leading spaces in the line of text. All it does is to move the pointer one place along if it is pointing at the start of the string, much neater than having to use LEFT\$ and MID\$.

The next step is to introduce a procedure to justify the full lines of text. Line 190 of listing 2 needs altering to:

190 PROCspread(LEFT\$(A,N%))
Then the new procedure inserts spaces until the line is the correct width. Here the string indirection operator makes the task much simpler. First it removes any trailing spaces in the string (line 280), and then goes through the string inserting an extra space after each space until the string is the correct length. If all the spaces have been doubled up and the string is still too short, then it goes round again, putting a third space in, and so on until the line is the correct length (see listing 3).

A routine such as this can be made more useful by allowing codes to be inserted in the text eg, to start a new page or to continue on the same line. This could be achieved by using the ' character followed by a number or letter for various effects. The ' can then be inserted in the data statements, the end being most convenient.

An interesting point is speed. Often

```

10 REM Hints & tips -
listing 2
20 REM by Martin Phil
lips
30 REM for BBC B/B+/M
/E
40 REM (c) Acorn User
December 1986
50 :
60 DIM A% 255
70 READ text$
80 PROCformat(5,30)
90 READ text$
100 PROCformat(10,20)
110 END
120 :
130 DEFPROCformat(x%,w
%)
140 $A%=text$
150 IF LEN($A%)<=w% TH
EN GOTO 230
160 N%=w%+1:REPEAT:N%=
N%-1
170 UNTIL N%?A%=32 OR
N%?A%=45 OR N%=0
180 IF N%=0 THEN $(w%+
A%-1)="-"+$(w%+A%-1):N%=
w%
190 PRINTTAB(x%)LEFT$(
$A%,N%)
200 A%=A%+N%
210 IF ?A%=32 THEN A%=
A%+1:GOTO210
220 GOTO150
230 PRINTTAB(x%)$A%
240 ENDPROC
250 :
260 DATA"These instruc
tions should be ignored.
They have no relevance
to anything else you mig
ht need here. They do sh
ow, however, the automat
ic word formatting routi
ne that I am so proud of
."
270 DATA"ABCDEFGHIJKLM
NOPQRSTUVWXYZabcde
fghijklmnopqrstuvw
xyz1234567890"

```

Listing 2. An alternative approach to listing 1

changes in methods of programming lead to differences in speed, however listing 1 and listing 2 both take exactly the same time to run!

The following back issues contain articles and information on the use of strings and how to handle them:

Strings, October 1982, page 24
Handling arrays, July 1983, page 39
Hints & Tips, April 1984, page 50
Hints & Tips, September 1984, page 50
Hints & Tips, December 1984, page 52
Strings Unknotted, April 1985, page 46

```

10 REM Hints & tips -
listing 3
20 REM by Martin Phil
lips
30 REM for BBC B/B+/M
/E
40 REM (c) Acorn User
December 1986
50 :
60 DIM A% 255,B% 80
70 READ text$
80 PROCformat(5,30)
90 READ text$
100 PROCformat(10,20)
110 END
120 :
130 DEFPROCformat(x%,w
%)
140 $A%=text$
150 IF LEN($A%)<=w% TH
EN GOTO 230
160 N%=w%+1:REPEAT:N%=
N%-1
170 UNTIL N%?A%=32 OR
N%?A%=45 OR N%=0
180 IF N%=0 THEN $(w%+
A%-1)="-"+$(w%+A%-1):N%=
w%
190 PROCspread(LEFT$(
$A%,N%))
200 A%=A%+N%
210 IF ?A%=32 THEN A%=
A%+1:GOTO 210
220 GOTO 150
230 PRINTTAB(x%)$A%
240 ENDPROC
250 :
260 DEFPROCspread($B%)
270 jump%=1
280 IF B%?LEN($B%)=32
THEN B%?LEN($B%)=13:GOTO
280
290 J%=1:REPEAT
300 IF J%?B%=32 THEN $
(J%+B%)=" "+$(J%+B%):J%=
J%+jump%
310 J%=J%+1
320 UNTIL LEN($B%)=w%
OR J%>=w%
330 IF J%>=w% AND LEN(
$B%)<w% THEN jump%=jump%
+1:GOTO 290
340 PRINTTAB(x%)$B%
350 ENDPROC
360 :
370 DATA"These instruc
tions should be ignored.
They have no relevance
to anything else you mig
ht need here. They do sh
ow, however, the automat
ic word formatting routi
ne that I am so proud of
."
380 DATA"ABCDEFGHIJKLM
NOPQRSTUVWXYZabcde
fghijklmnopqrstuvw
xyz1234567890"

```

Listing 3. Formatted and justified text

PRIME NUMBERS

Listing 4 is a short program to print out all the prime numbers between 3 and 99999. It works by storing all the prime numbers directly in memory.

The starting point for this memory store is J% and its location is &2000. The prime numbers are accessed using the word indirection operator '!'. An integer is stored in four bytes of memory, and the word indirection operator will retrieve an integer. P% is the pointer where the next

```

10 REM Hints & Tips -
  listing 4
20 REM By Martin Phil
lips
30 REM for BBC B/B+/M
/E
40 REM (c) Acorn User
  December 1986
50 :
60 J%=&2000:G%=J%
70 !G%=2:P%=G%+4
80 @%=8:T%=3
90 REPEAT
100 IF T% MOD !G%=0 G%
 =J%:GOTO 140
110 IF T%>!G%*!G% G%=G
 %+4:GOTO 100
120 PRINT T%;
130 !P%=T%:G%=J%:P%=P%
 +4
140 T%=T%+2:UNTIL T%>9
 9999
  
```

Listing 4. Prints prime numbers

prime number will be stored. T% is the number to be tested. To save time only odd numbers are tested.


Line 100 checks to see if the number can be divided by any of the prime numbers in the store and leave a remainder of zero. If it does, then the number cannot be prime and the program resets G% to the start of the prime number store ready to test the next prime number.

Line 110 checks to see that T% is greater than the square of the current prime number being tested. Once the number is less than the square of the highest prime number there is little point in testing with the higher prime numbers. If T% is greater than the square of the prime number under test then T% is tested against the next prime number. If not, then T% must be a prime number, and T% is printed out and stored in memory. The pointer P% is then moved forward four positions to point to

the next free memory location. It will end when T% is greater than 99999. It is possible to go higher than this, of course, if one is prepared to wait. Extending the limit will eventually mean that the computer will run out of room.

I checked the first few prime numbers, but have by no means checked them all. On a BBC micro with cassette or an Electron, Master or Master Compact, J% can be set to &1000, and this would give a greater memory store before the memory runs out. It would also be better to increase @% to 10 if the limits given in listing 4 are extended.

If you want to get your brains and micros working away with numbers, turn to the challenging competition on page 105.

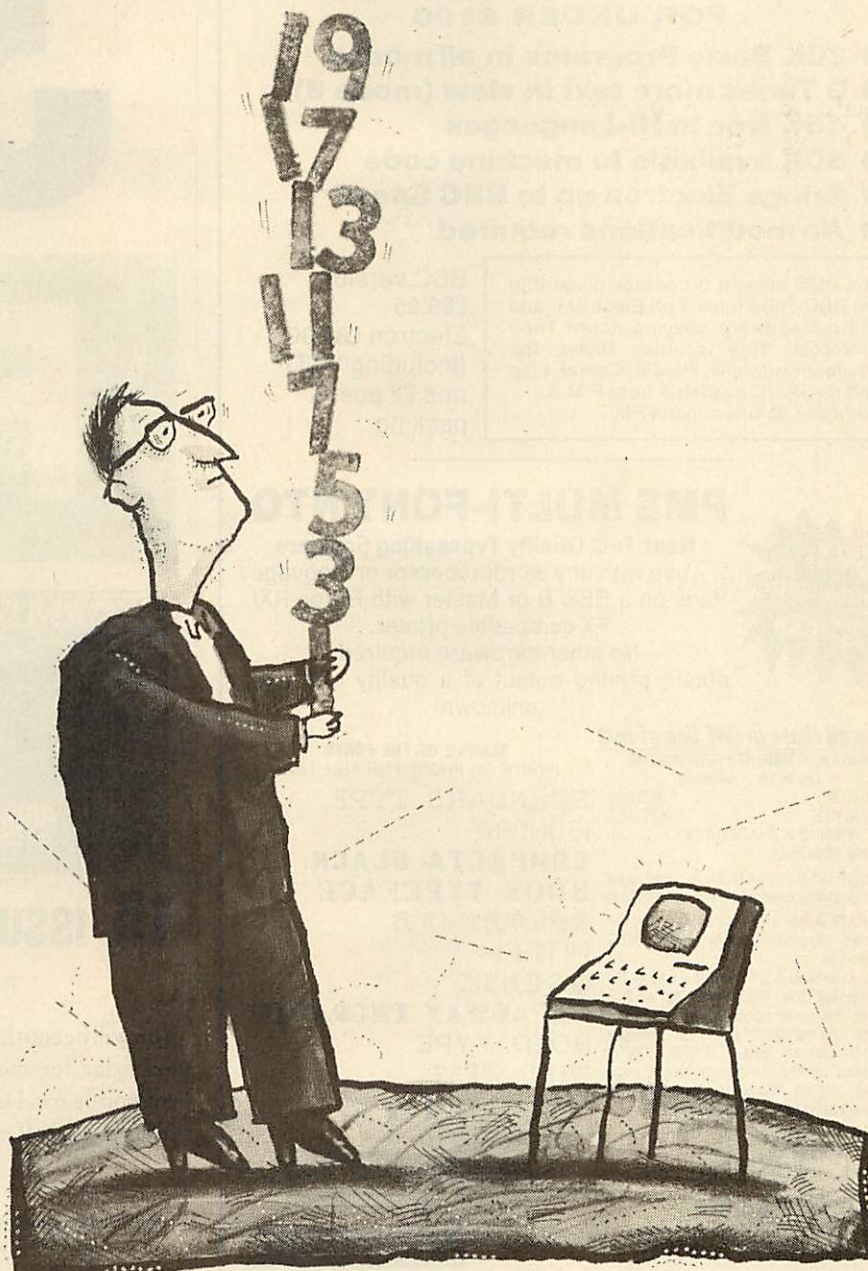

£5 PRINTING FRACTIONS

A useful hint has been sent in from Philip Hawthorne from Portadown in Ireland which wins him £5.

The following method can be used to print fractions on Epson-compatible printers using *Wordwise* or *Wordwise +*. The method is as follows:

1. Select superscript mode:
F1 OC27,83,0 F2
2. Print the numerator eg, three
3. Print a backspace and select subscript mode:
F1 OC8,27,83,1 F2
4. Print the denominator eg, four

- **30K Basic Programs in *all* modes**
- **3 Times more text in view (mode 3)**
- **45K free in Hi-Languages**
- **60K available to machine code**
- **Brings Electron up to BBC Speed**
- ***No* modifications required**

BBC version
£99.95
Electron £89.00
(including VAT)
and £2 post &
packing

Near Text Quality Typesetting Software
use with any wordprocessor or language
Runs on a BBC B or Master with Epson RX/
FX compatible printer.
No other hardware required
obtain printed output of a quality hitherto
unknown

- * FONTS (up to 16 x normal)
- * HEIGHTS
- * INVERSE AND SHADED TEXT
- * LINE SPACING
- * MICRO-JUSTIFICATION – right and left justifies proportionally spaced text
- * DRAFT mode – for fast, rough copy for proof reading – but with ALL NTQ features
- * WIDTHS
- * PITCHES

NTQ comes in a 2 ROM set – one ROM containing the NTQ software and 3 fonts, the other containing a further 4 fonts. Any number of FONT EXTENSION ROMs can be added. USER FONTS created by the definer software supplied can be stored in ANY bank of sideways RAM or burnt into a ROM.

STANDARD TYPE
ISONORM
COMPACTA BLACK
BOOK TYPEFACE
ROUNDHAND
HITECH
GOTHIC
BROADWAY ENGRAVED
BOLD TYPE
WILD WEST

MULTI-WIDTH
MULTI-PITCH

INVERSE

As you can see this is not simply another NLQ utility!

Read what the first published review, on "TUBELINK" says:

"Despite its technical superiority, using Multi-Font is extremely easy."

"A comprehensive piece of software which offers a well-chosen selection of fonts"

"striking . . . ingenious . . . stunning . . . powerful . . . flexible . . ."

"The quality of text is quite outstanding, and I really can't over-estimate the improvement in character it gives to a document"

What more can we say?

**38 MOUNT CAMERON DRIVE
ST LEONARDS
EAST KILBRIDE
G74 2ES**



03552-32796
(24 Hour)



AA292

3 ISSUES OF ACORN USER MAGAZINE

FREE



15 ISSUES FOR THE PRICE OF 12

This offer is only open to addresses in U.K.

You will be entitled to receive 15 scintillating issues of *Acorn User* magazine for the price of 12, when you subscribe using the coupon below. Don't hesitate. Send in your order now, while this really special offer lasts!

YES! Please start my 15-issue magazine subscription to *Acorn User* from the _____ issue and send it to the following address:

NAME _____

ADDRESS

POSTCODE

☐ I enclose my cheque/postal order for £17.50 made payable to Redwood Publishing

☐ Please debit £17.50 from my Access/Barclaycard/American Express

Account No:

Expiry date:

SIGNED

DATE _____

Send this coupon with your remittance in an envelope to **Christine Allen**,
Subscriptions Manager, Redwood Publishing, Lambourn Woodlands,
Newbury, Berkshire RG16 7TW.

HINTS & TIPS

5. Cancel the subscript mode:

```
F1 OC27,84 F2
```

6. This would print $\frac{3}{4}$ using the following string:

```
F1 OC27,83,0 F2 3 F1 OC8,27,83,1 F2 4  
F1 OC27,84 F2
```

It is better not to put the line in between the numerator and the denominator, because it can obliterate part of the number and make it very difficult to read. A half can be done in a similar way:

```
F1 OC27,83,0 F2 1 F1 OC8,27,83,1 F2 2  
F1 OC27,84 F2
```

and a quarter:

```
F1 OC27,83,0 F2 1 F1 OC8,27,83,1 F2 4  
F1 OC27,84 F2
```

Finally $\frac{9}{12}$ can be done as follows:

```
F1 OC27,83,0 F2 9 F1 OC8,8,27,83,1  
F2 12 F1 OC27,84 F2
```

Note that an extra space is needed before the nine, and an extra backspace must be included. If you really want to be clever, it is possible to print the nine directly between the one and two. This can be done on some printers using the proportional space command, or the horizontal tab command with a relative dot tab. These codes must be cancelled directly after use.

£5

MASTER SOLUTION

One of the most common reasons for programs not working on the Master micro is when user-defined characters are saved to tape or disc.

On the BBC micro and Electron the storage space for these characters is in page &C00. When these are then directly loaded into the memory they overwrite part

```
10 DIM ch(7)
20 x=OPENUP("CHAR")
30 FOR I%=128 TO 159
40 FOR J%=0 TO 7
50 ch(J%)=BGET#x
60 NEXT J%
70 VDU 23,I%,ch(0),ch
(1),ch(2),ch(3),ch(4),ch
(5),ch(6),ch(7)
80 NEXT I%
90 CLOSE#x
```

Figure 2. Creating an array

of the Master's Econet workspace.

On the Master series the storage space for user defined characters has moved into sideways RAM. Unless Econet is being used, loading these definitions into the wrong area of memory does not cause too

much of a problem except that the user defined characters are, of course, not defined. David Green from New Zealand has sent in what I think will become the standard procedure for converting programs to work on the Master, and wins himself £5 for the effort.

The solution is to create an array and retrieve the data in blocks of eight bytes, and then pass it directly into a VDU23 statement, see figure 2.

*FX PROBLEM

Mark de Weger writes from the Netherlands with an unusual problem. He was trying to write a program that allowed the user to print an ASCII/Wordwise/View text file in the background. The program worked by using events.

Now event handling routines should not use VDU commands to prevent upsetting the VDU queue. If you do not understand this, imagine that the computer was just carrying out a mode change to mode 7 with VDU22,7 and the event happened just after the VDU22 was executed. Suppose that the event handling routine made the computer execute a VDU2. Now the computer would think a VDU 22,2,7 command was issued and instead of changing to mode 7 and switching the printer on, it would enter mode 2 and make a beep.

Mark had to send characters to the printer, therefore he inserted characters into the printer buffer using *FX138,3,... Here the problem started. To see it, set up your printer and run the following program (figure 3):

```
10 VDU 2
20 FOR loop=1 TO 100
30 *FX 138,3,65
40 NEXT loop
50 VDU 3
```

Figure 3. The *FX problem

You would probably expect 100 letter As to be printed by the printer. But this is not the case, the printer doesn't do anything. However if you replace line 30 by:

```
30 VDU1,65
```

the As are printed as you would expect. The reason for this is probably that the BBC micro only sends a signal to the printer to empty the computer's printer buffer (and print it or store it in its own printer buffer) if a character enters the

printer buffer, but only if this happens due to a VDU command, not due to a *FX138,3 call. This can be seen with the following, restore line 30 to the original and add or change the following lines:

```
20 FOR loop=1 TO 10
45 VDU1,13
```

and re-run the program. Hey presto! Ten As are printed. This tends to reinforce the idea that the printer buffer can only be emptied if a character enters the printer buffer due to a VDU command.

How can Mark insert characters into the printer buffer without using VDU commands, but so that the computer's printer buffer is emptied (and printed) correctly by the printer?

QUICKFIRE CORNER

● For nearly a year I have despaired at the lack of a tear bar on my printer. There is one, but as the tractor feed is beyond the tear bar it is of no use. That is until I found an easy way to use it.

To tear the continuous feed stationery off, first switch to friction feed. Then open the two tractor feed paper clamps and tear the paper off against the cutting edge. Then wind the paper on an inch or so and close the clamps. Lastly do not forget to switch back to tractor feed. Obvious isn't it?

● Can't remember how many parameters follow a VDU call? Serious problems can occur with too few parameters especially as no error messages are given. If in doubt add a few extra zeros at the end. VDU0 does nothing hence any extra noughts will simply be ignored.

● Nigel Balchin from Cambridge has pointed out a simplification that could be used with the screen dumps presented in September's *Acorn User*. That is, instead of using VDU1, to send the next byte to the printer only, *FX3,10 will direct all the output to the printer and not the screen. Using this does away with the initial VDU2 and all the VDU1s. It can be cancelled by using *FX3.

● When loading sideways ROM images into sideways RAM on the BBC B+ and Master using the *SR commands, it has always been necessary to press CTRL-Break after it has loaded. A welcome feature on the Compact is both *SRLOAD and *SRWRITE can be terminated with an 'I' parameter and the sideways RAM image will be inserted automatically.

Computers by Post

LOWEST U.K. PRICES GUARANTEED



PRINTER RIBBONS

		2+	5+	12+
ACORN	AP80	£2.95	£2.40	£2.30
	AP100	£2.95	£2.40	£2.30
	DMP1	£3.90	£3.30	£3.10
AMSTRAD	DMP2000/3000	£4.60	£4.30	£4.20
	PCW8256/8512	£5.20	£4.60	£4.50
	HR5	£3.00	£2.80	£2.60
BROTHER	HR15 Corr	£2.90	£2.50	£2.30
	HR15 FAB	£3.60	£3.10	£2.90
	HR15 MS	£3.50	£3.00	£2.80
CANON	HR15 also for HR25/HR35	£2.90	£2.50	£2.30
	EP44	£3.70	£3.20	£3.00
	M1009	£3.40	£2.90	£2.70
CBM	PW1080A Black	£5.30	£4.70	£4.40
	PW1080A Red or Blue	£5.30	£4.70	£4.40
	PJ1080 Ink Jet Colour, One Off			£10.90
CENTRONICS	PJ1080 Ink Jet Black, One Off			£8.90
	1515	£2.95	£2.40	£2.30
	1525	£2.95	£2.40	£2.30
CITIZEN	MPS801	£3.90	£3.30	£3.10
	802/1526	£4.00	£3.20	£3.00
	803	£3.70	£3.20	£3.00
DAISYSTEP	MPS1000	£3.00	£2.60	£2.40
	4022	£3.00	£2.60	£2.40
	MSC801 Colour, One Off			£18.50
EPSON	DP51101 SS	£1.60	£1.30	£1.20
	DP51101 MS	£2.50	£2.10	£2.00
	DP51101 Corr	£1.80	£1.50	£1.40
JUKI	GLP	£3.70	£3.20	£3.00
	120D	£5.00	£4.60	£4.30
	2000 MS	£3.10	£2.60	£2.40
KAGA	2000 FAB	£4.90	£4.20	£4.00
	MX/FX/RX80 Black	£3.00	£2.60	£2.40
	MX/FX/RX80 Red or Blue	£4.20	£3.50	£3.30
M/TALLY OKI	100 Series	£5.00	£4.60	£4.30
	LX80/LX86	£3.00	£2.60	£2.40
	JX80 Colour, One Off			£18.50
PANASONIC	LQ800	£3.90	£3.50	£3.30
	LQ1500	£4.50	£3.90	£3.60
	6000/2200 FAB	£3.70	£3.40	£3.20
QUENDATA	6000/2200 Corr	£4.00	£3.60	£3.40
	6000/2200 SS	£3.10	£2.70	£2.50
	6100 MS	£2.50	£2.10	£2.00
	6100 SS	£1.60	£1.30	£1.20
	6100 Corr	£1.80	£1.50	£1.40
	KP810 Black	£3.40	£2.90	£2.70
	KP810 Red or Blue	£5.30	£4.70	£4.40
	MT80	£4.00	£3.20	£3.00
	80/82	£1.60	£1.30	£1.20
	84	£3.90	£3.40	£3.20
	Mate 20 Colour	£7.00	£6.50	£6.20
	Mate 20 Black	£6.60	£6.20	£6.00
	KX1091/2	£5.00	£4.60	£4.30
	DWP1120 MS	£3.10	£2.60	£2.40
	DWP1120 FAB	£4.90	£4.20	£4.00

QUME

SEIKOSHA

SHINWA SMITH CORONA

STAR

Sprint 7/9 MS	£3.10	£2.60	£2.40
Sprint 7/9 FAB	£4.90	£4.20	£4.00
GP50	£6.00	£5.50	£5.20
GP80	£2.95	£2.40	£2.30
GP100/250	£2.95	£2.40	£2.30
GP500/550	£3.90	£3.30	£3.10
GP700 Colour, One Off			£18.50
SP1000	£6.00	£5.50	£5.20
CP80	£4.00	£3.20	£3.00
TPI M/S	£8.50	£7.90	£7.20
TPI Fabric	£3.90	£3.60	£3.40
TPI Corr	£5.00	£4.70	£4.50
D100/200	£9.00	£8.50	£8.20
D300	£6.00	£5.50	£5.30
DP/GEMINI/SG	£1.60	£1.30	£1.20
SR15	£4.90	£4.50	£4.30
NL10	£5.60	£4.90	£4.60

FLOPPY DISKS

5 1/4"

JVC Inc Plastic Case

MD-1D	S/size D/dens 40TR
MD-2D	D/size D/dens 40TR
MD-2DD	D/size Q/dens 80TR
MD-2HD	D/size H/dens 1.6MB

VERBATIM - DATA LIFE

MD525	S/size D/dens 40TR
MD550	D/size D/dens 40TR
MD577	S/size Q/dens 80TR
MD557	D/size Q/dens 80TR
MD HD	D/size H/dens 1.6MB
SONY	S/size D/dens 40TR
	D/size Q/dens 40TR
	D/size Q/dens 80TR

3 1/2"

JVC

SONY

SONY

BULK 3 1/2" D/size D/DENS DISKS BY SONY

10 x Disks	£1.99 each	£19.90 pack
20 x Disks	£1.89 each	£37.80 pack
50 x Disks	£1.79 each	£89.00 pack
CF2 5 Disks	£3.25 each	£16.25 pack
CF2 10 Disks	£2.99 each	£29.90 pack

3" DISKS

ENVELOPES

110mm x 220mm White Self Seal 90gsm	500	£11.50
110mm x 220mm Manilla Banker Gummed 70gsm	500	£9.50
324mm x 229mm Manilla Self Seal 90gsm	250	£17.90

DISK STORAGE



LOCKABLE DISK BOXES

MODEL	SIZE	CAPACITY	PRICE
DD40L	3 1/2"	40	£8.90
MD60T	3 1/2"	60	£12.50
DD50	5 1/4"	50	£8.90
DD70	5 1/4"	70	£10.90
DX85	5 1/4"	90	£12.90
DD100	5 1/4"	100	£13.90
LIBRARY CASE	5 1/4"	10	£1.50

NON-LOCKABLE DISK BOXES

MD12/30	3 1/2"	24	£7.20
MF50	5 1/4"	50	£8.00

MICRODRIVE HOLDERS

WALLET	4	£1.75
WALLET	20	£4.50

PRINTER CABLES & INTERFACES



AMSTRAD

ATARI ST

BBC

IBM

MSX

CBM 64/128

SINCLAIR QL/SPEC 128

SINCLAIR SPECTRUM

AMSTRAD PCW

Parallel	£8.90
Parallel	£14.50
Parallel	£6.50
Parallel	£14.50
Parallel	£10.90
Parallel I/F	£59.90
Parallel I/F	£26.50
Parallel I/F	£32.50
Parallel/Serial I/F	£49.90

COMPUTER STATIONERY

PLAIN WHITE WITH MICRO-PERF EDGES			PRICE	
SIZE	GSM	QUANTITY	1 BOX	2 BOXES
11 x 9½	60	2000	£12.90	£12.00
11 x 9½	70	2000	£15.90	£14.50
EXACT A4	70	2000	£21.50	£18.75
11½ x 9½	90	1000	£13.50	£11.25

COMPUTER LABELS

PRICE PER THOUSAND	
1000	2000+
70 x 36mm	£4.40
89 x 36mm	£4.50
89 x 49mm 3 across only	£6.20
102 x 36mm	£4.70
Please state number of labels across sheets (1, 2 or 3).	

PRINTERS

Epson LX86	£209.95
Epson FX85	£334.95
Epson FX105	£435.95
Epson EX800	£386.95
Epson LQ800	£454.95
Epson LQ1000	£607.95
Citizen 120D	£155.95
Amstrad DMP2000	£139.95
Amstrad DMP3000	£152.95
Brother 1509	£416.95
Oki-mate 20 Colour	£169.95
Micra P MP165	£199.95
Seikosha SP1000A	£199.95
Seikosha MP1300A	£349.95
Star NL10 inc I/F	£199.95
Star SG15	£299.95
Star SD10	£299.95
Star SD15	£429.95

Star Powertype Daisywheel

Juki 6100

COMPUTERS

Acorn BBC Master	£399.95
Acorn BBC Master Compact	P.O.A.
Amstrad PCW8256	£389.95
Amstrad PCW8512	£489.95
Amstrad CPC464 Green	£169.95
Amstrad CPC464 Colour	£254.95
Amstrad CPC6128	£254.95
Amstrad CPC6128 Colour	£339.95
Atari 520STM + 500KD drive	£369.95
Atari other models	P.O.A.
Commodore C64	£139.95
Commodore C64C compend	£204.95
Commodore C128D	£429.95
CBM 1541 C Disk Drive	£168.95
CBM Amiga	P.O.A.
Sinclair Spectrum 128K + 2	£128.95

CF2 3" Disks

Box of 10

£29.90

BASF 5 1/4" 2D/96

D/size Q/dens 80TR

Box of 10 (min. 2 boxes)

£11.99

Maxwell 5 1/4" MD1D

S/size D/dens 40TR

Box of 10 (min. 2 boxes)

£9.99

SONY 3 1/2"

D/size D/dens

Box of 10

£27.99

TDK 5 1/4"

S/size D/dens 40TR

Box of 10 (min. 2 boxes)

£8.99

INTERWORD

WORD PROCESSOR

FOR BBC

£39.95

DELIVERY ALL CONSUMABLES AND SOFTWARE POST FREE
Hardware £5 + VAT 4 Day Delivery - £9 + VAT 24 Hour Delivery

GALASET GUARANTEE If after buying any of the hardware or software in this advertisement, you find the same item offered at a lower price locally within one week, Galaset will refund the difference.

All prices exclude VAT
CREDIT CARD HOT-LINE



01-760 0014

Galaset Ltd, 30 Bayford Road, Littlehampton, West Sussex.

Export Enquiries Welcome

To: **Galaset Ltd, 30 Bayford Road, Littlehampton, West Sussex.**

I wish to order.....

My computer is.....

I enclose cheque/PO for £.....inc VAT
or charge my Access/Visa No:.....

Name.....

Signature.....

Address.....

Postcode.....

Tel No:.....



FIRST BYTE

IT ALL ADDS UP

Assembly language workers need a firm grasp of addition and subtraction

Tessie Revivis

The most fundamental part of writing machine code is the ability to write code that will add and subtract numbers. When you begin to write even small programs, you will quite often want to access memory addresses. Now that is no great problem – we saw how to do this last month when we EORed 256 bytes of screen memory to alter its colour by using the X register to form an index which is added to a base address – like this:

```
LDA &4000, X
```

Here the contents of X are added to &4000 to give a final address. If X held &45 then the address from which the accumulator is loaded would be:

```
&4000+&45=&4045
```

But any 6502 register can only hold a number in the range zero to 255, so when X contains 255 and you add one, it wraps around and becomes zero again, and similarly, if X held zero and your program subtracted one, the contents would wrap back to 255. We need to add a unit of 256 (&100) to the address so that it becomes:

```
&4000+&100=&4100
```

and X can start again.

So how do we add two values together? The answer is the ADC instruction. There are two ways in which this can be used; the first is in immediate mode and the second in a non-immediate mode – we'll examine the former first.

In immediate mode, the two numbers added are the one in the accumulator and the one specified by the ADC command:

```
LDA #3 load accumulator with three  
ADC #5 add five to it
```

On completion of the ADC instruction the result is deposited in the accumulator. Listing 1 is a short program to do the above addition – it deposits the result at &70 which is then peeked and printed.

Now enter listing 2 and run the program to see what happens.

The result is not 264 as expected but

```
10 REM Simple Addition  
20 DIM code% 20  
30 P%=code%  
40 I  
50 CLC  
60 LDA #3  
70 ADC #5  
80 STA &70  
90 RTS  
100 J:CALL code%  
110 PRINT "Result is: ";?&70
```

Listing 1. Addition in immediate mode

eight. Why? As the accumulator can only hold numbers in the range zero to 255 it

```
10 REM Simple Addition 2  
20 DIM code% 20  
30 P%=code%  
40 I  
50 CLC  
60 LDA #131  
70 ADC #133  
80 STA &70  
90 RTS  
100 J:CALL code%  
110 PRINT "Result is: ";?&70
```

Listing 2. Shows an unexpected result

would seem that the ADC instruction is rather limited in this respect. So how do we go about adding numbers that will give results greater than 255, the sum of 128 and 129 for instance? The simple answer is that we don't. First, remember that the computer is adding the binary representation of the two numbers. In binary 131 and 133 are respectively:

```
131 = 1000 0011
```

```
133 = 1000 0101
```

We can add these together and the rules for binary addition are as follows:

```
0 + 0 = 0
```

```
0 + 1 = 1
```

```
1 + 0 = 1
```

```
1 + 1 = 0 carry 1
```

The last rule may seem difficult to grasp but think how denary (base 10) addition works: take two numbers and add them together if the result is nine or less you jot

down the result in the column below, if it is greater than nine, write the unit value in the right column and carry the tens into the next column. Binary addition is very much the same except that we are working only with zeros and ones.

Now apply the binary addition rules to add 131 and 133:

```
bit no. 7654 3210
```

```
131: 1000 0011
```

```
133: 1000 0101
```

```
+: (1) 0000 1000
```

Working from right to left we have:

```
bit 0: 1+1 = 0 carry 1
```

```
bit 1: 1+0+1 = 0 carry 1
```

```
bit 2: 0+1+1 = 0 carry 1
```

```
bit 3: 0+0+1 = 1
```

```
bit 4: 0+0 = 0
```

```
bit 5: 0+0 = 0
```

```
bit 6: 0+0 = 0
```

```
bit 7: 1+1 = 0 carry 1
```

The addition of bit seven results in a carry, but we have no further bits to take the carry to be added. What is provided is a store for the carry so that it can be tested – this store is called the carry bit. We can see that this bit does actually have an effect on the way an addition is performed. Because the carry bit can have one of two states, one or zero, we must clear it to zero before doing any addition, which was done in listing 1 in line 50. Change this to:

```
50 SEC
```

and re-run the program. The result printed is now not eight but nine, because we have set the carry flag. This illustrates an important point, the ADC instruction is an ADD with carry instruction – in other words it adds the two numbers, then adds the carry flag. It is for this reason the carry flag should be cleared prior to an addition.

	Accum + value + carry = result			
CLC	9	5	0	8
SEC	3	5	1	9

Table 1. Effects of the carry flag



The Acclaimed Utility for Tape to Disc Transfer



"REPLAY is a pretty marvellous device, more than a toy for those who have to document software, very useful if you can only buy a tape version of a program (it doesn't matter what nooks and crannies the code is packed into) and a good opportunity to have fun with the screens of your choice. A liberating piece of software and highly recommended."

'Software Reviews',
A & B Computing, Dec. '85.

"REPLAY is the current state-of-the-art answer to tape to disc transfer, available for the BBC B (and B+). This consists of a ROM and some hardware which must be attached inside the computer. Once installed it will cope with virtually any program you care to put to the test."

'First Byte',
ACORN USER, May, '86.

"Many facilities are advertised to enable BBC micro users to copy or back-up protected programs and transfer them from tape to disc. While some break the protection in the process and thus assist software piracy, others are more responsible, using techniques which retain the protection. Vine Micros, who already leads the field in the latter group with the T.D.ROM, now supplies REPLAY."

'ROM Roundup',
MICRO USER, July, '86.

TAPE TO DISC TRANSFER – MID-PLAY 'STOP AND SAVE' – MID-GAME PAUSE FACILITY
MOST DISC TO DISC TRANSFER – DISPLAYS A 'STOPPED' SCREEN READY FOR PRINTING.

Easy to fit with no soldering, uses one sideways ROM socket with three simple connections on to computer.

REPLAY must be matched to the DFS in use: R8271 – Acorn 8271, Pace and Watford S/D: R8272 – U.D.M. DFS: R1770 – Opus 3.45 and Solidisk Issue 1 board: R1770A – Acorn 1770 DFS and ADFS, also Solidisk Issue 2 board: R1770B+ – BBC B+ : R1770C – Opus Challenger: R1770W – Watford DDFS: R2791 Opus 3.15: R2793 – Opus 3.35: R8877 – Cumana QFS: (Acorn 'Master' in preparation).

Price **£35.00** inclusive, with full instructions for installation and use.
Further details and reviews available.

The MATRIX ROM BBC 'B', B+ and ELECTRON

This ROM will be of interest to Engineers, Scientists and Mathematicians. Using BASIC commands it is an indispensable tool for performing matrix operations and the solving of linear simultaneous equations. The MATRIX ROM was written with the co-operation of the Civil Engineering Dept., University of Southampton.
Price: **£36.00** (plus VAT) includes Manual. Quantity discount offered. Further details can be provided on request.

"B+ to B" CONVERSION KIT

This addition will enable BBC 'B' tapes to be used on the B+ computer.
Price: **£21.95** with O.S. 1.20 ROM
£15.95 without ROM (both prices include VAT + postage)

The ADDCOMM ROM BBC 'B', B+ and ELECTRON.

A Toolkit/Graphics utility adding 40 extra BASIC commands. Brilliant programming and value for money. 16-page brochure and reviews sent on request.
Price: **£28.00** inclusive.

Ready now.

ACORN MASTER PRODUCTS. O.S. OVERLAY ROM BOARD

An internal board taking three ROMs which can 'overlay' any of the eight ROMs already built-in.
(Computer **must** have a socketed 1 Mbit ROM.)

Price: **£19.95** (inclusive of VAT and post).

WRITE-PROTECT SWITCH

A small module which plugs into the computer and offers write-protection to the sideways RAM banks.

Price **£8.95** (inclusive of VAT and post).

All items direct from:

**VINE MICROS, MARSHBOROUGH, SANDWICH,
KENT CT13 0PG. Tel: 0304 812276.**

Or through your local Dealer.



UNBEATABLE LOGOSOFT CHRISTMAS OFFER

You probably know by now that there's more to LOGO than just turtle graphics. And there's much more to LOGOSOFT than just LOGO. At the unbeatable all-inclusive price of **£35** just see what the LOGOSOFT package contains:

YES PLEASE!

I would like to take advantage of the unbeatable LOGOSOFT Christmas offer. Please send me the following package(s):

Quantity **LOGOSOFT** on ROM for the BBC Micro (also compatible with the Acorn Master).

Quantity **LOGOSOFT** on DISC for the Acorn Master (also compatible with BBC Micro sideways RAM).

Supply ☐ 40-track ☐ 80-track discs. [please tick]

I enclose **£35** per package (VAT and postage included)

NAME

ADDRESS

1. A full **LOGO** interpreter on either ROM or DISC. This is the LOGO language in its entirety: list processing, data handling, numbers, variables, procedures, debugging ... and graphics too!
2. The ultimate introductory **LOGO Manual and Textbook**: 232 pages of fully illustrated instructions on how to get started in this new revolutionary programming language.
3. The **LOGOSOFT Toolkit**: Two discs containing an amazing selection of utilities, demonstrations and **applications software** including: ● Interfacing toolkit ● BBC Buggy Driver ● Cheetah Speech Chip Driver ● Epson Printer Screen Dump ● Jessop and Valiant Turtle Drivers ● Zero II Driver ● Joystick interface ● Concept keyboard interface ● Arithmetic Utilities ● Data File Handling ● Fractional Arithmetic ● Graph Plotting ● List Processing ● List Sorting ● Multiple Turtles ● Normal Distribution ● Property Lists ● Rank Correlation Coefficient ● Set Theory ● Statistics ● Transformational Geometry ● Turtle Graphics ● Vector & Matrix Algebra ● Vector Graphics ● Wrapped Turtle Graphics
4. The 40pp colour coded **Toolkit Manual** with full instructions on how to use the Toolkit software.
5. Hotline support via the **LOGOSOFT HOTLINE**, a direct line to the British software team that designed and wrote the fastest and most efficient LOGO for the BBC Micro and Acorn Master.

all for an
unbeatable

£35

including VAT
including postage

Send this form to:
LOGOSOFT, 316a Richmond Road,
Twickenham, Middlesex, TW1 2PD.

Telephone
01-
891 0989

FIRST BYTE

So to get around the possible overflow of the carry flag we need to do a two byte addition; if there is a carry over from the first byte it will be added to the second byte by the next ADC instruction. But what if we don't want a second number to be added? We simply add nothing, to get the carry flag as listing 3 illustrates.

```
10 REM Simple 2 byte addi
tion
20 DIM code% 20
30 P%=code%
40 I
50 CLC
60 LDA #131
70 ADC #133
80 STA &70
90 LDA #0
100 ADC #0
110 STA &71
120 RTS
130 J:CALL code%
140 PRINT "Result is: ";?&
70;
150 IF ?&71=1 THEN PRINT "
plus Carry"
```

Listing 3. Adding zero in a two byte process

Having examined how addition works it makes sense to look at subtraction. The command that carries out a subtraction is SBC, or Subtract with Carry. Before a subtraction is made the carry flag must be set with the SEC instruction. The following program subtracts three from seven.

```
10 REM Simple subtraction
20 DIM code% 20
30 P%=code%
40 I
50 SEC
60 LDA #7
70 SBC #3
80 STA &70
90 RTS
100 J:CALL code%
110 PRINT "Result is: ";?&70
```

Listing 4. Subtraction example

You may be wondering why the carry is set before a subtraction. To understand why, we need to know about a technique called twos complement.

In binary subtraction it is much easier to think of subtraction as being the addition of one positive number and one negative number, so four minus three becomes four plus (minus three). To add this negative number to a positive number we need to find a way of representing a negative in binary. A system called signed binary was introduced, where bit seven of the byte is used to denote the sign of the number – when clear it is for a positive number,

when set it is for a negative number. For instance in signed binary the number:

0000 1111
would be 15, whereas:
1000 1111
would be minus 15.

However, this is not an entirely accurate way to represent negative numbers. To convert a number to a true negative value, we obtain its twos complement. This is done simply by inverting each bit and then adding one. To invert a bit, simply change its state; a one becomes a zero and vice versa.

To represent minus three in binary, first write the binary for three:

0000 0011
now invert each bit:
1111 1100
and then add one:

1111 1101
Thus the twos complement value of minus three is:

1111 1101.
We can now take three from four by adding minus three to four thus:

(4) 0000 0100
(-3) 1111 1101
add (1) 0000 0001

The result is one but with a carry at the end. The one is correct but the carry is making the result nonsense. So ignore it.

The reason we must first set the carry flag in any addition then is simply to gain the bit we need to add to the inverted bits. Of course we don't do this ourselves, but the 6502 chip does – so it inverts (or flips) the bits and pinches the one from the carry to obtain the twos complement value. At the end of it all the carry is still set and so everyone is satisfied. As in the ADC examples above you can try changing the SEC to CLC and see that the result is in fact one less than it should be.

The immediate mode of operation applies to both addition and subtraction, as

```
10 REM Non-immediate subtr
action
20 DIM code% 20
30 ?&70=10: ?&71=7
40 P%=code%
50 I
60 SEC
70 LDA &70
80 SBC &71
90 STA &72
100 RTS
110 J:CALL code%
120 PRINT "Result is: ";?&
72
```

Listing 5. Non-immediate mode example

does the non-immediate mode. Simply, this technique involves using memory contents as a source of reference. We could therefore add or subtract the contents of locations &70 and &71 together and store the result in &72 as listing 5 demonstrates.

The following examples are limited to use of zero page addressing, in other words the data addresses are all stored in zero page – that is memory from &00 to &FF. We should only use memory from &70 to &8F inclusive for our needs. However, addition and subtraction can be performed using other addressing modes. Listing 5 can be altered to subtract two numbers held in main memory.

```
10 REM Absolute subtract
ion
20 MODE 6
30 DIM code% 20
40 num1=&2FFD:num2=&2FFE
50 result=&2FFF
60 ?num1=240: ?num2=40
70 P%=code%
80 I
90 SEC
100 LDA num1
110 SBC num2
120 STA result
130 RTS
140 J:CALL code%
150 PRINT "Result is: ";?
result
```

Listing 6. Altering listing 5 for subtraction

We can also use indexed addressing. An index register, such as the X register, is used to access memory from a starting point. Listing 7 illustrates this.

```
10 REM Absolute indexed
20 MODE 6
30 DIM code% 20
40 num1=&2FFD:num2=&2FFE
50 result=&2FFF : offset
=&10
60 num1?offset=100
70 num2?offset=55
80 P%=code%
90 I
100 LDX #offset
110 SEC
120 LDA num1,X
130 SBC num2,X
140 STA result,X
150 RTS
160 J:CALL code%
170 PRINT "Result is: ";o
ffset?result
```

Listing 7. Accessing numbers offset bytes

Do practice this method of addition and subtraction of numbers and ensure you understand fully what is happening. It is probably one of the most fundamental actions in machine code.

Watford Electronics

Jessa House, 250 Lower High Street, Watford WD1 2AN, England

Tel: Watford (0923) 37774/40588 Tlx: 8956095 WATFRD Fax: 01 950 8989



All prices exclusive of VAT; subject to change without notice & available on request.

Credit Card Orders (ACCESS & VISA) Tel: (0923) 33383 or 50234 (24 Hours)



BBC MASTER 128K Micro	£395
BBC MASTER TURBO 4MHz	£493
512K Processor Add on Board	£335
Turbo 65C102 Add-on Module	£99
BBC MASTER ET	
(Econet Terminal)	£320
Econet Module for the Master	£43
ROM Cartridges for Master	£13
Reference Manual I (No VAT)	£15
Reference Manual II (No VAT)	£15
Advance Ref. Manual (No VAT)	£19
64K Upgrade Kit for B+	£32
Acorn 1770 DFS Upgrade Kit	£42
ECONET Upgrade Kit for BBC	£42
ALL ECONET UPGRADES Available	

SPECIAL OFFER

FREE with every BBC Master purchased from us, Software Packages worth

£80

Comprising of: Computer Concepts New INTERWORD, wordprocessor Rom,

OFFICE MATE & OFFICE MASTER Softwares on Disc consisting of Database, Spreadsheet, Beebplot Graphics, Wordprocessor, Accounts Packs: (Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements, Stock Control.

6502 Acorn 2nd Processor package	£172
Z80 Acorn 2nd Processor package	£319
32016 Co-Processor	£999
Cambridge Workstation	£3450
ARIES IEEE Interface	£238
Acorn IEEE Interface Complete	£280
Acorn Teletext Adaptor	£125
Acorn Prestel Receiver	£115
Acorn Bitstick I	£299
Robocom Bitstick II	£759
Upgrade for Bitstick I to II	£450
Bitstick Multiplotter Driver	£65

(Securicor carriage £7)

By popular demand our retail shop is now open until 8.00pm. every Thursday.

VARIOUS PRINTERS

● EPSON FX85 Printer	£315
● EPSON FX105 Printer	£435
● EPSON JX-80 Colour Printer	£420
● EPSON Hi-80 Printer Plotter	£319
● EPSON Paper Roll Holder	£17
● EPSON LX86 Printer	£229
● BROTHER M1409 Printer	£285
● SEIKOSHA GP50A & GP50S	£49
● Centronics Printer Cable to interface all the above Printers to BBC	£6
(Securicor carriage charge on printers £7)	

RX & FX PRINTER INTERFACES

Epson interfaces fit inside the printer to allow connection using techniques other than Centronics.

RS232	£27	RS232 + 2K Buffer	£55
IEEE 488	£65	RS232 + 8K Buffer	£75



COMPACT without monitor	£385
COMPACT with green monitor	£469
COMPACT with colour monitor	£599

INTRODUCTORY OFFER

As an introductory offer, we are offering the Computer Concept's INTERWORD ROM and Gemini's OFFICE MATE and OFFICE MASTER software packages (worth £80) ABSOLUTELY FREE with every COMPACT bought from us in November.

Securicor £7

WHY SHOULD I BUY A

MASTER COMPACT?

Acorn Computers have sold over 1,000,000 computers to the home, education, business and research markets over the last six years, and so are a well established contender in the market. Originating, and still very compatible with, the original BBC design from over 5 years ago, the Master Compact features many enhancements to the specifications of a Model B. The Operating System has doubled in size, the amount of memory installed has quadrupled, an advanced disc filing system is included as standard, and an even faster and more expanded version of the famous BBC Basic is installed.

Using a special 'front panel' program, you can configure the Compact to power up according to your requirements. The disc drives for the Compact are housed in a separate box, which contains the power supply and doubles as a monitor stand. Thanks to this box, the Compact normally only requires one mains socket.

RGB (colour) and composite video (monochrome) connections are provided as standard, along with a phono socket to permit external amplification of the 4 voice sound synthesis system. An 'Atari' style digital joystick port permits a wide range of joysticks to be used.

The Compact is supplied with a massive amount of bundled software, making it ideal for home, business and educational use. A single 3.5" disc drive is supplied as standard, with a second drive optionally available later. You can purchase the Compact with either a bundled colour or monochrome monitor, or choose from one of our popular range of colour and monochrome monitors. A UHF modulator will be available shortly for use with TVs. An Econet kit will soon be released, as will an RS232 kit.

There is already a lot of software available on 3.5" disc format (with much more to follow), but we can supply converted 5.25" disc drives, should these be required. A 50 way expansion bus guarantees future expansion.

Bundled software includes: Basic 4 (1986), View 3 (latest version), Printer drivers for View, Logotron Logo, ABC Word Processor, ADFS (latest version), Disc Utilities, Arcade style game, Adventure game, Range of tutorial programs, Desktop environment software, Notepad, calculator and clock for desktop, TimPaint drawing package, Card Index System, Character Definer.



Official ACORN Distributor

CENTRONICS GLP & Brother M1009 (NLQ) Printers

A major price break-through in NLQ Printers from Watford.

At last, a full feature NLQ printer at a price that everyone can afford. Due to Watford's bulk purchasing power and low margins we can now offer this incredible printer deal direct from the manufacturers to our customers.

The Centronics GLP printer which is manufactured by BROTHER (and also marketed by them under their own brand name M1009), features a Near Letter Quality (NLQ) mode using a 23 by 18 dot matrix for each NLQ character (this is the same as is used by the very popular Kaga Taxan printers). The NLQ Font Rom supplied is Watford's own Professional NLQ ROM for the GLP/M1009.

Single, double and quadruple density graphics modes as well as four character widths and super/sub script printing are also supported, along with many other facilities normally found on printers costing twice as much.

Handles upto 9" wide paper. Friction feed standard, tractor feed optional extra.

GLP is bidirectional logic seeking. Has a 9 needle print head. 50 CPS. Parallel interface only.

Special Offer £95 (carr £5)

Tractor Feed Attachment £7

Centronics GLP Mk2 (Brother M1109) NLQ Printer

100 CPS, (25 in NLQ mode), Bi-directional, logic seeking, Friction feed, tractor feed optional extra, 2K Buffer. Has both Centronics parallel and RS232 both as standard. Simply at the flick of a DIP switch, the Mk2 printer swaps between full IBM or Epson compatibility.

Launch Price: £139 (carr. £5)

Tractor Feed Attachment £5

BROTHER HR-15XL

(NEW IMPROVED FAST HR-15XL)

The new improved Brother HR15XL is a very high quality and very fast daisy-wheel printer for serious use. Notable features of this printer include a 3k buffer, 20cps, bi-directional proportional spacing, Centronics interface standard, (RS232 optional).

ONLY £295 (carr. £7)

TRACTOR FEED Attachment £84

Ribbon Cartridges:

Fabric £3; Carbon £3; Multistrike £5
DAISYWHEELS (various typefaces) £18

PRINTER SHARERS

(Ideal for School environment)

Connect 3 BBC Micros to 1 Printer **£60**
Connect 6 BBC Micros to 1 Printer **£129**

PRINTER CHANGER

Connects 3 Printers to 1 Micro **£65**
(Cables extra)

HITACHI 672 PLOTTER

Only: £450 (Carr £6)

SPECIAL OFFER

EPROMs for BBC's Sideways ROMs.

2764-250ns £2.00

27128-250ns £2.40

RAMs (Low power) for ATPL, WATFORD, etc.,
Sideways ROM Boards

6264LP (8K) £3.00

2 x 6264LP (16K) £5.90

KAGA KP810 NLQ PRINTER

This rugged printer is made by Canon of Japan and is the same as Canon PW1080. It is fully Epson FX80 compatible and offers superb NLQ printing.

Our Price: ONLY **£215** (£7 carr.)

Kaga RS232 Interface	£49
Kaga RS232 Interface + 2K Buffer	£69
Kaga RS232 Interface + 16K Buffer	£95

KAGA KP910 Printer

Similar to the KP810 but has 17" wide carriage for wide print. Gives 156 columns of normal print or 256 columns in condensed mode. Ideal for printing out spreadsheets.

ONLY **£375** (£7 carr.)

PRINTER LEAD

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8
Compact's Special Centronics Lead	£9
RS232 Cable	P.O.A.
IBM Parallel 1 meter Cable	£12

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
BBC Micro	—	£3.50
BBC Master	—	£4.00
FX100	£7.00	£5.25
FX80/MX80/FX85	£4.50	£4.95
RX80	£4.50	£4.50
LX80	£4.00	£4.50
GP80	£4.50	£4.00
GP100/GP250	£5.95	£3.95
Centronics GLP	£4.00	£3.75
KAGA KP810	£5.25	£4.75
CANON PW1080	£5.25	£4.75
Panasonic KX1080	£7.75	£4.75
Microvitec Metal Monitors	—	£5.50

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

Listing Paper (Perforated)

1,000 Sheets 9½" x 11" Fanfold Paper	£7
2,000 Sheets 9½" x 11" Fanfold Paper	£12
1,000 Sheets 15" x 11" Fanfold Paper	£9
Teleprinter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90 x 36mm (Single Row)	£5.00
1,000 90 x 36mm (Twin Row)	£4.90
1,000 90 x 49mm (Twin Row)	£7.50
1,000 102 x 36mm (Twin Row)	£6.25

Carriage on 1,000 Labels £1.00

Acorn/Olivetti JP101 Spark Jet Printer


One of the main problems with most printers is that they are hopelessly noisy. How often have you wanted to print something late at night but not done so for fear of waking the children? Also ideal for those working in quiet environments such as libraries, etc. Silence the complaints with the serious solution from Watford at the amazing cost of only

£65

Pack of 4 refills **£10**

**FREE Spark Dump ROM WORTH
£15 for each JP101 purchased
this month**

JP101 Sparkjet Dump Rom £15



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with connecting lead.

MICROVITEC 14"

- 1431 - Medium resolution as used on the BBC television computer programme **£172**
- 1451 - High resolution, suitable for word processing in mode 0 **£225**
- 1441 - High res, exceeds the capabilities of the BBC micro **£365**
- 1431AP RGB + PAL and AUDIO **£199**
- 1451AP RGB + PAL and AUDIO **£259**
- TOUCHTEC Touch Screen Pack **£250**
- Dust Cover for Microvitecs **£5.50**

KAGA/TAXAN 12"

- KAGA KX1201G Hi-res Green Monitor **£90**
- KAGA KX1202G Long persistence Hi-Res Green Monitor **£98**
- KAGA KX1203A Ultra-Hi-Res Amber Monitor **£98**
- KAGA Super Vision 3, Ultra Hi-res, RGB Colour; Text mode switch allows monochrome text display in Green, Amber, White reverse or White on Blue **£320**

STAR BUY

- PHILIPS 14" Hi-Res, dark-glass, attractively finished Colour Monitor - supplied complete with RGB, SKART and Audio/Phono connectors. A push-button switch toggles between Hi-Res monochrome green text mode and full colour display.

ONLY £199

ZENITH

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality, stylishly finished monitors as used in the larger Zenith Micro Systems.)
Green (New Design) Hi-res **£69**
Amber (New Design) Hi-res **£76**

LEADS

- BNC Lead for Zenith or Philips **£3**
- Skart Monitor Lead **£5**
- RGB lead for KAGA **£3**
- N.B. Carriage on Monitors **£7** (securicor)


SWIVEL BASES for Video Monitors

By placing your monitor on one of our superb swivel bases, you gain the freedom to adjust the monitor viewing angle to suit your needs. By doing this, you alleviate eye strain and reduce back stress.

for 12" Monitors **£12** (carr. £2.50)
for 14" Monitors **£16** (carr. £2.50)

Panasonic KX-P1080

FREE BBC Micro Cable

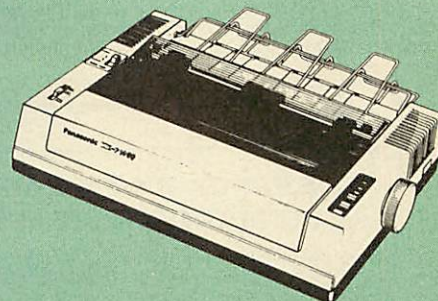

**From the prodigious Japanese Stable of
Panasonic comes this fabulous new NLQ
Dot Matrix Printer**

Available NOW at a superbly realistic price, the KX-P1080 perfectly balances features, quality of construction and Value for Money to produce the printer of tomorrow, here today, ready to sweep the current generation of machines away.

Ingenious innovation in terms of software control codes permits great flexibility when it comes to defining the print style. A nippy 100 cps of clear Draft text backs up the crisp 20 cps Near Letter Quality text mode, with upto 40 superbly useful downloadable characters. A delightful range of assorted character widths is efficiently supported, with sizes ranging from a broad 5 cpi to petite 17 cpi, EVEN in NLQ mode. Some of the extensive support for serious use includes specialised functions to perform justification, centering and even left and right ranging. Proportional spacing permit even greater freedom when it comes to advanced use. Not only is the full Epson RX control code set implemented, but extra codes have also been added to cater for the NLQ options, etc.

A full 96 ASCII character set is supported, with an extended set of 32 international characters A 1K Print Buffer alleviates much of the wait time normally associated with printing, whilst the bi-directional logic seeking print head takes the quickest route to print as required.

The draft text is implemented with a 9 x 9 matrix, with Near Letter Quality effected by means of an 18 x 18 matrix.

FREE with every KX-P1080 printer purchased this month, 1000 sheets of fanfold paper, printer cable for a BBC micro and our sophisticated Dump Out 3 screen dump ROM.

Introductory Price: **£155** (carr. £7)

NEW LAUNCH

A few months ago, we introduced the KX-P1080 to our large and discerning customer base. As a result of the enthusiastic and overwhelming reaction to this versatile dot matrix printer (see above for details), we are now extremely pleased to be able to bring you details of the fabulous KX-P313 Daisywheel Printer, also from Panasonic. The KX-P313 printer is the ideal printer for the home user wishing to produce clear, immaculate letters or reports.

Ideally suited to the pocket of the home user, costing not much more than a pair of disc drives, this daisywheel printer delivers flawless text at 10, 12 or 15 characters per inch. It also supports proportional print mode.

Printing at a respectable 17 characters per second, the KX-P313 features a capacious 6 kilobytes printer buffer to swallow most printing requirements with ease. For the more demanding user, there is a 32 kilobytes printer buffer option available. Taking paper up to 13.5" wide, the KX-P313 prints with bidirectional logic seeking, ensuring the minimum time to print your text.

Continued →

MARK 2 LIGHT PEN

You no longer have to fiddle with the brilliance control or work in the shade as this NEW Mark II Light Pen is totally insensitive to local lighting conditions. It only operates on high frequency light from the TV or Monitor. The red LED Indicator on the Mk II pen, lights up when valid video data is available. Your program can have access to this signal allowing computer verification of target for high res drawing. The conveniently located switch on the pen body allows the computer to ignore any stray signals. Supplied complete with the sophisticated PEN-PAL Software on Cassette or Disc. Please specify.

Special Offer Price: £15

THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED (BOOK)

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities - he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, Canon PW1080A or any Epson FX80 compatible Printer with the BBC Micro, both from Basic and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

Superb Value at £5.95 (No VAT)

WATFORD TOPS THE DFS CHART

Watford's Ultimate DFS has scored highest points in ACORN USER's unbiased DFS's Review of July 1985.

In concluding, the reviewer writes "It must be said that Watford's DFS certainly offers a comprehensive range of facilities at a very attractive price". (Please write in for comprehensive details.)

WATFORD's & ACORN's SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for three years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn DFS).

PRICES

- Complete Disc Interface Kit incl. DFS ROM & fitting instructions **£58**
- Acorn's 0.90 DFS Kit complete **£52**
- DFS Manual (Comprehensive) (no VAT) **£6.95**
(P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs)
- Watford's sophisticated DFS ROM only **£16**
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£12**
- DNFS ROM only **£17** ● ADFS ROM only **£25**
- Watford's DFS is exclusively available from Watford Electronics. Every ROM carries a special label with our LOGO and serial number.

WATFORD's DOUBLE DENSITY DFS INTERFACE

The DDFS from Watford Electronics represents a new standard in DFSs for the BBC micro. This is a double density version of our popular single density DFS, and combines all the features of this powerful DFS with the advantages of a system that gives 80% more storage per disc in double density mode. P.S. - Please note that not all DDFSs are capable of providing either the full 80% storage increase, or of allowing a file the full size of the disc - Ours allows both of these! Operates both in Single & Double Density modes.

The typical piece of games software these days is provided upon a protected disc. In order to work on any double density system (including the others on the market) a protected piece of software needs to make calls through the OSWORD & 7F routines. To ensure compatibility, the Watford DDFS features probably the most comprehensive and powerful 8271 emulation ever written for a double density system.

PRICES

- Complete DDFS Kit incl. fitting instructions **£46**
- DDFS Manual (no VAT) **£6.95**
- We will exchange your existing Single Density DFS Kit for our DDFS Unit at **£35**

CHRISTMAS GIFT VOUCHERS

Following numerous requests from you the customers, we have at last introduced our GIFT VOUCHER service. The Vouchers are available in £5; £10 & £15 denominations and are an ideal answer when faced with that problem of what to give for that special Birthday/Christmas gift. Simply send your credit card number or your cheque for the amount of Vouchers you require and we shall send you these attractive Vouchers. (There is a 50p handling charge on any amount.)

MYSTERIES OF DISC DRIVES & DFS REVEALED (BOOK)

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.


Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford's new book entitled 'MYSTERIES OF DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

£5.95 (Book No VAT)

DISC ALBUMS

£4

Attractively finished in antique brown leather look vinyl. Stores upto 20 Discs. Each disc can be seen through the clear view pocket.



STAK-PAK

The unique computer program filing and storage system. Made of tough black plastic, these compact drawer sections hold two cassettes each and lock together vertically to form miniature cabinets of any height. Each drawer section has two C12 Data Cassettes with labels plus external index card.

Five twin Packs incl.
10 Cassettes Only: **£5**

FLOPPY HEAD CLEANER KIT


The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use.

£8

LOCKABLE DISC STORAGE UNITS

Strong plastic case that afford real protection to your discs. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.


- M35 - holds upto 50 discs **£8**
- M85 - holds upto 95 discs **£11**



PLASTIC LIBRARY CASES

FOR 5 1/4" DISC STORAGE
holds 10 Discs.

£2.00



DUST COVERS (For our Disc Drives)

- Single CLS (without PSU) **£3.20** Twin CLD (without PSU) **£3.85**
- Single CS (with PSU) **£3.95** Twin CD (with PSU) **£3.90**

Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates the single density capacity. The double density storage capacity is second one, (that within the brackets). All disc Drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our drives are of Japanese manufacture. All our 80 track drives are already fitted with a 40-80 select switch.

All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.


Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality JVC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate: extensive tests within our workshops have confirmed this. All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. (Ideal for Schools & Colleges. We are now able to supply all single disc drives in Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives; allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below for single drives is for a single drive in a standard single case. Single drive in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today!)

When using a BBC Micro, most people find themselves short of space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space; your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 10th page of our advert for the Plinths).

P.S. All our 5¼" Disc Drives are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

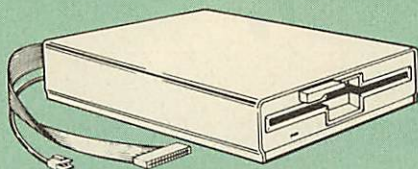

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
200K (360K)	CLS 200 £89		CS 200 £99	
400K (720K)	CLS400S £97	CLD 400 £165	CS 400S £110	CD400 £189
800K (1.44M)		CLD 800S £183		CD 800S £205
● TWIN Disc Drive Case, complete with Power Supply & Cables £35 Securicor carriage on Disc Drives £5 to £6				

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40/80 Switchable

e.g. CLS400S = Cased drive, Less power supply unit, Single 400K, Switchable (40/80 track).

3M – DISKETTES

Top quality 3M – SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All our discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick disc labels and write protect tabs.

- 10 x 5¼" S/S D/D 40 Track Diskettes **£10**
- 10 x 5¼" D/S D/D 40 Track Diskettes **£12**
- 10 x 5¼" S/S D/D 80 Track Diskettes **£17**
- 10 x 5¼" D/S D/D 80 Track Diskettes **£17**
- Hi-Density 1.6M D/S D/D for IBM **£32**
- 10 x 3½" S/S D/D 40/80 track Discs **£20**
- 10 x 3½" D/D D/D 40/80 track Discs **£27**

TOP QUALITY 5¼" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs.

DON'T SETTLE FOR LESS, BUY THE BEST

- 10 x M4 S-S D/D 40 Track Discs **£9**
- 10 x M5 D/S D/D 40 Track Discs **£11**
- 10 x M7 D/S D/D 80 Track Discs **£15**

- 3" Double Sided Discs **£4 each**

Special BULK OFFER on 5¼" DISCS

(Supplied packed in plastic storage Units)
(Lifetime warranty on Discs)

BULK PACK DISCS in lots of 100

Type	S/S 80T	D/S 80T
● Without Sleeves	£49	£74
● With Sleeves	£50	£75

ACORN WINCHESTER DRIVES

Suitable for direct connection, via the 1MHz bus, to any BBC running ADFS. These Acorn Winchester disc drives are fast and extremely reliable. Each Winchester comes complete with the Level III Econet File Server software.

10 Megabytes **£1050**; 30 Megabytes **£1549**

WATFORD'S WINCHESTER DRIVES


- 20 Megabytes with ADFS **£635**
- 40 Megabytes with ADFS **£999**

WINCHESTER WORKSTATION

20 Megabyte Winchester, plus a Tape Streamer and a 400K Floppy Drive all housed in a plinth with cooling fan **£1499**

CDP 800S

CDPM 800S

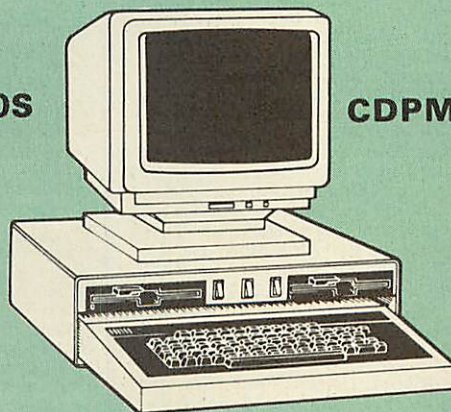


Twin 800K Double sided 40/80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £235

CDPM 800S for Master £245
(Securicor Carr. £7)

EPSON NLQ ROM for the BBC Micro



Harness the full potentials of your Epson RX & FX Printers. Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ! (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

- Simply type *NLQ80/100 and a single VDU code to use NLQ print.
- NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.
- Single codes select PROPORTIONAL type (yes even on the RX80); ENLARGED type; UNDERLINED type. These features can be used separately or in any combination.
- Full UK character set; Standard 'pica size'; Proportional spacing; Enlarged; Underlined; Normal type.

The NLQ ROM is supplied complete with comprehensive manual.

P.S. NLQ ROM is compatible with the Torch Z80 system and can be used from within the Perfect Writer software.

Only: £25

VIEW PRINTER DRIVER for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM.

A must for all VIEW and NLQ ROM users.

£7.00

(Hi-View compatible)

THE NLQ DESIGNER

(The First & still the Best)

KAGA KP810/910 and Canon PW1080 are two superb printers, as our many thousands of satisfied customers would surely attest to. One of it's particularly strong points is the NLQ option that it offers; perhaps one of the more weaker points is the effort required to design your own custom NLQ font.

Well the solution is here NOW in the shape of Watford's NLQ DESIGNER ROM! For the BBC Micro. This powerful piece of software allows easy design and entry of a full NLQ font, with further fonts recallable from disc. Once a font has been programmed with the versatile NLQ DESIGNER, it can be saved to disc, downloaded to your Kaga (or Canon) printer, or even programmed into an EPROM (given the appropriate hardware) and then plugged directly into your printer so that it is available immediately when you turn it on. Downloadable Fonts require 6264 RAM chip fitted. Now BBC Master compatible.


A 40 or 80 track (please specify) FONT Disc containing 9 Fonts, (Italic, Courier, Courier Italic, Script, Copper Plate, Shadow, Bold, Double Print, Gothic and Greek is now supplied FREE with every package.

(P.S. This ROM is not suitable for Epson printers.)

- NLQ Designer ROM & FONT Disc **£25**
- Kaga Individual FONT ROMs **£15**

(Write in for further details).

DUMPOUT 3

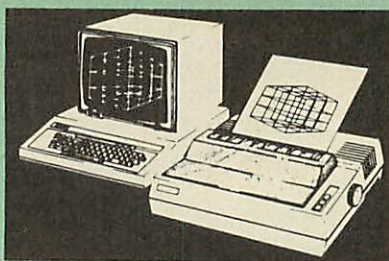

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate - if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

Two commands are used to operate the dump routines:

*GIMAGE - This provides a full graphics dump of any graphics mode, plus modes 7 and '8'. There are many optional parameters but you need only specify the parameters you wish to change.

Features available include:

- Vertical and horizontal scaling through all the graphic modes and mode 7
- Rotation of the image produced through 90, 180 and 270 degrees
- Left hand indentation setting
- Screen dump window definition
- Colour grey scaling
- Two tone fast dump
- Special colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered dumps
- User port switched dumps

What does the independent press say!

Practical Electronics, May 1985

"The Dump Out 3 ROM from Watford Electronics represents one of the most sophisticated types of printer dump utilities available for the BBC Micro ..."

"an extremely sophisticated and powerful dump utility".

"VERDICT - Dump Out 3 ROM has all the facilities which you are ever likely to need for producing printer dumps. The facilities available work extremely well and if printer dumps are something which you require, then this ROM can be recommended to help you to get the best out of your dot matrix printer".

The Micro User Feb. 1985.

"Well, here is that winner!"

"provide(s) some rather sophisticated screen dumps. Producing high resolution paper copies of graphic screens in any (graphics) mode will be the major reason for buying this ROM, and this is where Dump Out 3 performs PAR EXCELLENCE". (Our capitals for their italics.)

"The versatility of *GIMAGE (the graphics dump command) when using these parameters is amazing. Pictures of almost any size, shape, contrast or distortion may be produced without the need for a reducing photocopier or trick photography".

"Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC micro. It is easy to use yet highly versatile, and caters for all BBC screen modes in multitone high resolution printing. Whole, partial, rotated and scaled screens may be dumped to almost any BBC compatible dot matrix printer (see our list at the end of this advert). At £25 it must represent excellent value for money and surely cannot be beaten".


Designed for use with the following printers:

GLP, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/400, Mannesman Tally etc.

Price including comprehensive manual

£25

ROM MANAGER

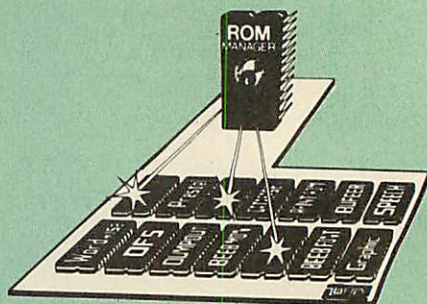

Probably the most powerful way of expanding the BBC micro is from the use of Sideways ROMs. One problem faced by the avid ROM collector is that of ROM command clashes. The solution is very simple in the form of the ROM that "Provides comprehensive management of all your installed ROMs". (Quote from BEEBUG November '84.)

Basically, ROM Manager offers you the ability to turn off any installed ROM, or to send any * command to any specific installed ROM. It is said that imitation is the sincerest form of flattery - Acorn's BBC Plus features many of the abilities of this powerful ROM.

Many more facilities available.

SPECIAL OFFER £18

THE AMX MOUSE



Now supplied with the NEW SUPERART Software ROM & Disc at no extra cost.

ONLY: £65 (carr £1.50)

We are giving away, absolutely **FREE**, our popular Colour Art software package worth **£15** with every AMX Mouse package purchased from us.

AMX DESK Package	£19.00
AMX UTILITY Package	£11.00
AMX SUPERART Package	£42
AMX PAGE-MAKER Pack	
Best desk-top publishing software.	
Works with keyboard,	
joystick and AMX Mouse	£39
AMX 3D ZICON Disc	£20
AMX Database Disc	£20
AMX XAM Educational	£20
AMX MAX: A gem of desktop (ROM)	£17

RB2 MARCONI TRACKER BALL


This popular unit is supplied complete with software. Price: **£50**

FLEET STREET EDITOR

Software pack **£35**

TRANSFEROM

(Tape to Disc Utility)

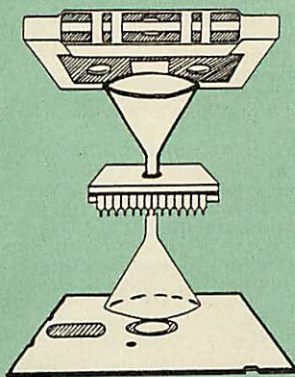

Not compatible with 1770 DFS.

This advanced and sophisticated utility ROM for the BBC Micro has the following features:


- Fully menu driven for ease of use
- Copes with locked programs
- A very comprehensive built in copying features
- Copies very long adventure games
- Supplied with comprehensive manual

TRANSFEROM is now available in BOTH single and double density versions. The single density version works with both the Acorn and Watford single density DFSs. The double density version works with the Watford DDFS system only.

TRANSFEROM takes your software on tape and saves them onto disc. TRANSFEROM does not stop when one disc is full; you just insert another disc in and carry on with that one! Surely this is the most valuable investment you could make if you have tape software that you wish to transfer to disc! Please specify version required - Single or Double Density.

£25.00

DIAGNOSTICS DISC



The BBC micro is a very complex machine and thus diagnosing a fault can be very difficult. Until now, the only way to discover the nature of a fault was either to find a competent friend with a large degree of patience or to find your nearest dealer and pay him to find out what is wrong.

At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.

The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

NEW
LAUNCH

THE BBC PLUS ROM BOARD

Specially designed for all BBC Plus users, this board sits in an external box, and will accept either 10 off 16k EPROMs, OR 10 off 32k EPROMs.

With the 32k EPROMs, only 5 can be 'online' at once (that's all the B+ can address, as each chip 'holds' two normal sockets worth), but you can swap between the two banks if necessary. With the 16k EPROMs, you can obviously address them all at once. An extra card can be added to permit 2 banks of 10 EPROMs to be used (again with only one bank available at once).

The ROM box, which has its own mains power supply, and connects to the BBC Plus via a specially designed card (which is a buffered card for your peace of mind) permits easy access to the EPROMs via the hinged lid. NO soldering is required for this board.

ROMAS

THE CROSS ASSEMBLER AND MACRO EDITOR FOR SERIOUS PROGRAMMERS!

ROMAS is a carefully designed, sophisticated yet simple to use, development system for serious assembly language programmers. Using the BBC as the development system, you can choose your target system from the following processors:

6502, 65C02, Z80, 8085, 8041, 6809 and Z8 P.S. This includes the Acorn 6502 & Z80.

A give away at... Only £29

Please specify 40 or 80 track disc when ordering.

ROM-SPELL

"way ahead of any competition"



ROM-SPELL is probably THE most advanced and fastest spelling checker available for the BBC Micro. Printed below are some extracts from a recent independent review (A&B Computing Nov. '85), which we feel sure will convince you that this is THE only spelling checker worth considering.

"The editing system is very neat and simple, instead of replying to queries and beeps all of the time..."

"The other feature which places ROM-SPELL way in front of any competition is the ability to examine the user dictionary, so any spelling mistakes that have found themselves on the disc can be examined and taken out if necessary."

"... that it is compatible with many of the popular word processors on the market is a good indication that ROM-SPELL is going to be a very popular product indeed."

"... ROM-SPELL is by far the best spelling checker for the unexpanded BBC B (with or without word processor). It boasts features which are hard to find on conventional spellcheckers on CP/M and MSDOS, namely Spellstar and has a speed/performance ratio of roughly the same as its CP/M cousin. The difference is that the CP/M version would cost the best part of £500!"

"... and with such vital house keeping features as an ambiguous word checker, the ability to edit the user dictionary, a comprehensive manual that is both easy to read and actually ENJOYABLE to learn from, ... I feel confident that ROM-SPELL will woo the word processing public with no problems at all!"

Compatible with: View, Wordwise & Wordwise +.

Don't settle for less. Buy the best.

£25

(Not compatible with 1770 DFS)
(Please state 40 or 80 track disc)

BBC MICRO BUSINESS/WORD-PROCESSING PACKAGE


A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). We supply everything you need to get a BBC micro running as a word-processor. Please call in at our retail shop to discuss your particular requirement and a demonstration.

EXAMPLE PACKAGE

BBC Master 128K Micro, View wordprocessor, Viewsheets, Basic Editor, Terminal Emulator, Twin 800K 40/80 track double sided Disc Drives, Zenith Hi-Res green monitor, Brother HR15XL professional quality Daisy Wheel printer, Gemini Database, Spreadsheet, Beebplot Graphics, Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements, and Stock Control packages on disc with manuals.

Only £949

COPY HOLDERS

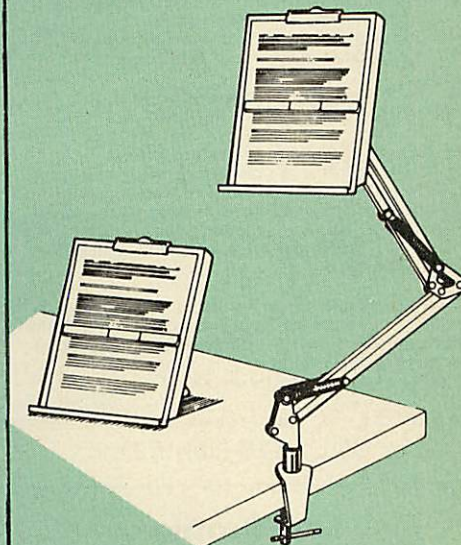

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.

Available in desk resting and shelf clamping versions, these two units hold your paper firmly by means of a magnetic ruler and a clip grip.

Mounting to a convenient flat surface, the two joint anglepoise Manuscript Holder allows the paper to be positioned at virtually any convenient angle whilst only taking up a fraction of the surface area that the paper being held does.

The smaller desk resting Manuscript Holder is useful for the more organised desk where the problem is simply holding the paper at the right angle.

Whatever desk arrangement you use, surely you deserve a Watford Manuscript Holder!

Amazing value at only
Desk Top £10 (carr. £2)
Angle poise £14 (carr. £3)

All prices in this advert are exclusive of VAT.


REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good.

£13 (40 or 80 track)

Continued

SIDEWAYS ZIF SOCKET

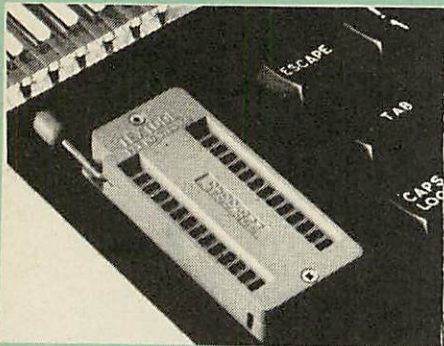

Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

- Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.
- The low profile of the socket allows unrestricted access to the Keyboard.
- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.
- This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)

- BBC, B+ and Master compatible.

ONLY £15 (carr £2)

Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack.

Complete System	£12
Spare Cartridges	£2.50
Spare Rack	£1.50

16K Sideways RAM Modules

This is it! The revolutionary design RAM Module you've been waiting for. Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector.


Key points to note about this new addition to the Watford range of products are:

- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Ideal for professional software development.
- Supplied with utilities software disc.

Only: **£29 (carr £2)**

Optional extras

READ and WRITE protect Switches	£2 each
Battery for Battery Backup	£3

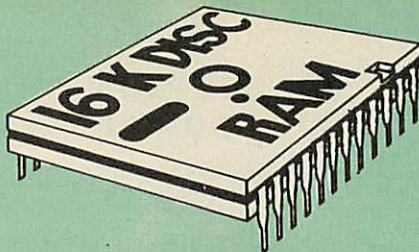



This is the RAM you've been waiting for!! This battery backed up, write protectable 16K sideways RAM board allows you to run from disk every sideways ROM available. Beware of other sideways RAM boards which are not backed up as certain ROMs will not run in these boards even though the RAM can be write protected. The Battery Backup facility allows retention of DATA after power off. On switch on the Micro will think the WATFORD DISC RAM is a ROM. Features available are:

- No soldering or modifications to BBC micro necessary.
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.
- The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM in conjunction with our Buffer & Backup ROM.

New Low Price: £32 (carr £2)

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

SOLID STATE 16K SIDEWAYS RAM

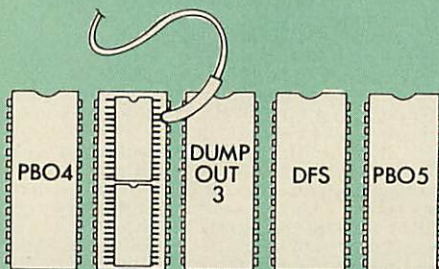

This new unit from Watford, which utilises the latest in Static RAM technology, offers 16k of easy-fit sideways RAM in a very compact unit with a footprint no larger than a standard 28pin EPROM. With only a single flying lead terminating in a mini hook-on probe, to fit, (no soldering required) this compact unit works with any BBC Micro with or without a ROM board. **Compatible with BBC B Plus.** Like our other 16K RAM Modules, this unit is very simple to fit.

Only **£28 (carr 2)**

Supplied complete with comprehensive software on Disc, Operating and fitting instructions.

Do you find the 16K Sideways RAM Units confusing? If so, we have compiled this quick questionnaire to help YOU decide which is the best one for you. If the answer to any of the questions is yes, then use the index number to select from the boards below. Options in brackets indicate possible secondary choices.


Do you require:

- Sideways RAM for a BBC B? Choose 1, 2 or 3.
- Sideways RAM for the B+? Choose 3.
- A small, basic module? Choose 3.
- A sideways RAM module for a ROM board? Choose 1 or 3.
- An easy to use utilities disc? Choose 1, 2 or 3.
- More than one module installed at once? Choose 1 or 3.
- To use sideways RAM as a printer buffer? Choose 1 or 3.
- Battery Backup? Choose (1) or 2.
- Write protect for RAM (makes ROM look like RAM)? Choose (1) or 2.
- Read protect (allows recovery from crashes)? Choose 1.

Key:

- 1) 16k Sideways RAM Module
- 2) 16k Disc RAM
- 3) Solid State 16k Sideways RAM

SOLDERLESS SIDEWAYS ROM SOCKET BOARD

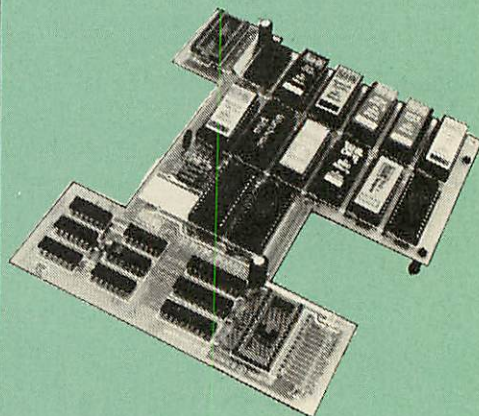

In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others - not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it success".

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)


- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:
- Increase your BBCs capacity for ROMs from 4 to 16.
- **No soldering required.**
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 takes two 6264 RAM chips.
- Read protect to make RAM "Vanish"; allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

Price: Only £34

Battery backup fitted **£36**
(carriage £2)

Watford ROM/RAM CARD

A must for all serious users

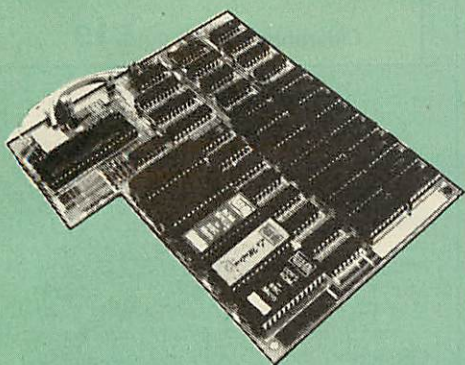

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with all BBC micros (not BBC+ or Master).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Software Write protect for ALL RAM.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Accepts any ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD & 7F for ROM-SPILL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM/RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM/RAM Board.

The ROM/RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, for later.

Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM £43
- ROM/RAM card with 64k dynamic RAM £59
- ROM/RAM card with a massive 128k dynamic RAM £89

(carriage on ROM/RAM Card £3)

OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit £6
- 16k Dynamic RAM for Upgrade £7.50
- Battery backup £3
- Read and Write protect switches £2 each
- Complete ROM/RAM board (all options installed) £99

Le Modem



The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World/wide data transfer system.
- Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELESOURCE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple *COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A *AUDIO ON/OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!)
- A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.
- FREE 3 months subscription to MicroLink.

- BT Approval applied for.

SPECIAL OFFER

Price: **£79**
(carr £3)

(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual)
(Write in for further details)

PROHIBITED from direct or indirect connection to any telecommunication system run by British Telecommunications. Action may be taken against anyone so connecting this equipment.

Nightingale Modem

SPECIAL PRICE to our Customers

£99
(carr £3)

(Price includes: Nightingale Modem, Commstar ROM pack, Cables & Comprehensive manual)

- Nightingale Modem without software **Only £87**
- COMMSTAR ROM package only **£29**
(P&P on modem £2.00)
- Auto Dial/Auto Answer Board (non BAPT) **£48**
- Auto Dial Utilities Disc **£9.50**
- OBBS Bulletin Software **£20.00**

APPROVED by the British Telecommunications system for use in the public network in accordance with the conditions set out in the conditions for use.

APOLLO

The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost - High Performance modem with Auto Dial & Auto Answer facilities as standard; we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal.

Just look at these features:

- V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services.
- Reverse V23 allows User run Viewdata service.
- 1200/1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump.
- Fully BAPT approved.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution - Buy a Watford APOLLO!

Special Launch Price: **£75**
(Carr £3)
(Write in for full specification)

BT TELEPHONE CONNECTORS

LJU 1/4A Mini Line Master	£4.50
LJU 1/6A Mini Line Slave	£3.00
LJU 2/4A Line Master	£4.00
LJU 2/6A Line Slave	£2.50
LJU 3/4A Flush Master	£3.95
LJU 3/6A Flush Slave	£2.75
LJU 10/3A Dual Splitter	£5.50
4 Way BT Plug	£0.75

Versatile BEEP SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE £32 (carr £2)

Continued →

COMPUTER CONCEPT'S ROMS

ACCELERATOR	£48
CARETAKER Basic Utility	£27
Graphics ROM	£23
Disc Doctor ROM	£24
TERMI	£27
COMMUNICATOR	£49
SPEECH ROM	£26
Printmaster	£24

Wordwise

£25

Wordwise plus

£40

We are giving away absolutely **FREE**, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

Word-Aid

**The most comprehensive
utilities ROM
for Wordwise-Plus**

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text/segment area.
- BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS

Supplied on disc. This version requires a WORDWISE-PLUS ROM to be present in the machine. It gives up to 44k of text space on the 6502 2nd processor.

£5

Inter SHEET £40

INTER-CHART

ONLY: £26

Inter-WORD


Only: £46

Special Discount price for the existing Wordwise Plus owners. Simply quote your reg. number and pay.

Only: **£39**

All Prices Exclusive of VAT

32K SHADOW RAM- Printer Buffer Expansion Board

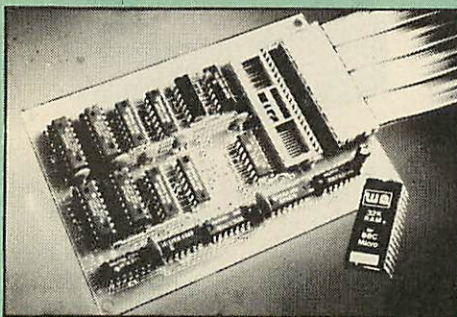

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B+ or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer – type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.

- "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free – 5 times as much as normal.

- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.

- Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

- Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise or Wordwise-Plus, due to the way they are written.

- Ensure COMPATIBILITY with a vast range of hardware (including our ROM board, the ATPL ROM boards, double density boards, second processors), and software (including BASIC, TOOLKIT, VIEW, WORDWISE (1.20+), WORDWISE-PLUS, Music 500's AMPLE). This is because our board, unlike those of our competitors, is connected to the computer by a ribbon cable and has the power consumption of a couple of ROMs!

- Achieve EASY OPERATION with ROM based software. A large range of commands is available for machine code and BASIC users, including some useful *HELP messages, and a comprehensive manual is supplied free.

- Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

Only: **£59** (carr £2)

(Price includes a comprehensive manual and the ROM)

SPECIAL OFFER Acorn's Speech Synthesiser Package

Complete with manual in its original packaging

Clearance price Only: **£19**

INCREDIBLE WORD PROCESSING DEAL !!!

Watford Electronics, already renowned for quality products at discount prices, are offering, the truly spectacular BARGAIN OF THE YEAR!

A Watford's 32K Shadow RAM Card – Printer Buffer and the much sought after, Computer Concepts' Inter-WORD, (a very powerful package) All this at an astounding price of:

Only **£79** (carr £2)

DATAGEM

Gemini's popular Database package
Only: **£34**

VIEW

VIEW WORDPROCESSOR 2.1 **£37**

VIEW 3.0 ROM

Price: Only **£56**

HI-VIEW

A special version of VIEW designed for use with 6502 2nd Processor. Available on disc, it offers 47K of text memory.

£36

VIEWSHEET (Acornsoft) **£37**

VIEWSTORE **£37**

VIEWSPELL with 80 track disc **£29**

VIEWPLOT Disc **£22**

VIEW-INDEX **£14**

**Watford's own Sophisticated
VIEW PRINTER DRIVER
for Epson FX80 & KAGA KP**

Only **£10**

**VIEW DRIVERS FOR JUKI &
BROTHER HR15 PRINTERS**

Only **£10**

**VIEW/VIEW SHEET PRINTER
DRIVER for SILVER REED**
(Officially approved by Silver Reed)
Only: **£10**

MINI OFFICE II (tape) **£14.50**



ARIES CORNER

Aries B-32 Shadow RAM Card

18 months of intensive research and development have produced a worthy successor to the widely acclaimed Aries-B20; the revolutionary Aries-B32. This 'second generation' expansion board features 32k of RAM and a 16k ROM socket.

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved *FX call.

Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the processor socket on your BBC micro - no flying leads to connect and no soldering. Provision of the on-board ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

Price: B-32 **£80** (carr. £2)

Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries B-20 and the Aries B-32. For the business user or educationalist, the compact and secure internal fitting is ideal, with the ROM board tucked neatly inside the lid where it will not cause overheating problems. The serious software developer and the hobbyist may prefer to mount the board externally, giving instant access to the sockets for experimental purposes. A zero-insertion force (ZIF) socket may be fitted to the board to enhance this mode of operation.

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable 'mother board' which carries the extension ROM sockets and a small 'base board' on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribbon-cable based systems.

If you do not have an B32 or B20, a small adaptor module (the Aries B-12C) is available at a nominal cost. The 6264 static RAM chips used to provide the sideways RAM are advertised elsewhere in our advert.

Price:

Aries B-12 **£40**. Aries B-12C **£5**

GRAPH PAD 2

Supplied complete with Software
£60 (Carr. £3)

ARIES B-488 IEEE-488 INTERFACE UNIT

The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a single high-speed data network.

Aries B-488 Unit: **£238** (Carr £3)

THE ARIES RANGE HARDWARE REQUIREMENTS

Aries B-32 - BBC B, MOS 1.20, hardware plugs into CPU socket.

Aries B-12 - BBC B, MOS 1.20, hardware plugs into all four sideways ROM sockets and connects to the B32 or the B20. The adaptor Aries B-12C module is necessary where these are not fitted. Aries B-488 BBC B, MOS 1.20, Hardware plugs into 1MHz Bus.

BEEBMON

The most powerful machine code monitor for the BBC Micro **£24**.

DISASSEMBLER ROM

ONLY **£16**

THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering.

Only **£20**



**CREDIT CARD 24 HOUR
Ansaphone Hot Lines
(0923) 50234/33383**

النور

ARABIC ROM for the BBC Micro

The ALNOOR ARABIC ROM converts your BBC into a bilingual computer. New keytops provide both English and Arabic symbols. Two sets of Arabic symbols are provided for use in either context sensitive or insensitive operation.


20, 40 and 80 column operation. Compatible with ASMO (449). English/Arabic printer interface software. Numeric entry from either left or right of number. Communications software to send or receive 7 or 8 bit data.

Different shapes of Vowels (e.g. Shadda, Fatha, etc). Different shapes of Hamza. Full English and Arabic character sets with all special characters.

£85

(Price includes Alnoor ROM, Operating Manuals & a full set of Arabic/English Keytops)

PLINTHS FOR BBC MICRO, MASTER & PRINTERS

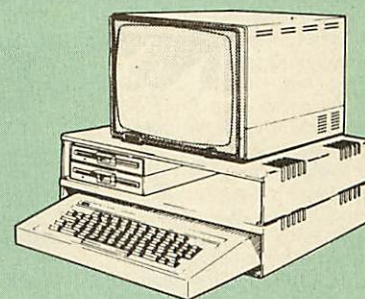

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH **£11** (carr. £1.50)
DOUBLE BBC PLINTH **£20** (carr. £2.00)
PRINTER PLINTH **£10** (carr. £1.50)
SINGLE MASTER PLINTH **£14** (carr. £1.50)
DOUBLE MASTER PLINTH **£25** (carr. £2.00)

OFFICE MATE

The popular Database, Spreadsheet, Beebplot and Wordprocessor on Disc
£10

OFFICE MASTER

The popular Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements and Stock Control
£21

Money Management

This disc based software allows individual transactions to be stored and retrieved for upto 5 Bank a/c and 5 Loan accounts.

Price: Only **£11**

L.B.O. Rom Life & Business Organiser

Use LBO to organise your life from today until 1999! It can handle literally hundreds of multi-line messages, as many as you are ever likely to need. Despite the very wide range of facilities offered, this professional program is VERY easy to use and requires absolutely NO knowledge of computers. A vital aid to your everyday life, LBO is GREAT FUN TO USE!

Price only: **£17**

DDD Suite Integrated Software System

-BASE **£12**

-CALC **£12**

-PLOT **£12**

COMBO PACK All 3 together **£26**

Continued



BOOKS (No VAT on Books)


30 Hour BASIC (BBC Micro)	£7.95
40 Best machine Code Routines	£7.95
6502 Assembly Language Program	£19.95
6502 Application	£11.95
6502 Assembly Lang. Subroutines	£19.95
6502 Development System	£7.50
6502 Machine Code for Humans	£7.95
68000 Assembly Lang. Programming	£19.95
68000 Machine Code Programming	£13.00
68000 Programming the	£22.95
6809, Programming the	£16.95
A User Guide to Wordwise Plus	£9.95
A Young persons Guide to	
BBC Basic	£5.95
Advanced Disc User Guide	£16.95
Advanced BASIC ROM User Guide	£9.95
Advanced Machine Code Technique	
for BBC	£7.95
Advanced Programming for BBC	£6.95
Advanced User Guide for BBC	£15.95
Advanced Graphics with BBC	£9.95
Assembly Language Programming on	
BBC Micro	£11.50
Advanced Programming Techniques	
for the BBC Micro	£8.95
Adventure into BBC BASIC	£6.95
Applied Assembly Lang. for BBC	£9.95
Assembler Routines for the 6502	£7.95
Assembly Language Programming FOR the	
BBC Micro	£8.95
Assembly Language Programming on the	
BBC & Electron	£8.95
Basic Programming on the BBC Micro	£6.95
Basic ROM User Guide	£11.95
Basic User Guide for BBC Micro	£10.00
BBC B+ User Guide	£14.95
BBC BASIC	£5.95
BBC Forth	£7.50
BBC Hardware Projects	£8.95
BBC Machine Code Portfolio	£7.95
BBC Master 128 High Flyer	£10.95
BBC Micro Advanced Ref. Guide	£10.95
BBC Micro Advanced Programming	£10.00
BBC Micro Book BASIC Sound &	
Graphics	£7.95
BBC Micro ROM Book	£9.95
BBC Micro Disc Companion	£8.95
BBC User Guide	£10.00
BCPL User Guide	£14
Complete FORTH	£6.95
CP/M - 86 User's Guide	£19.95
CP/M Bible	£16.50
CP/M Handbook with MPM	£9.95
CP/M Plus Handbook	£13.95
CP/M Soul of	£16.50
CP/M The software BUS	£8.95
Creative Animation & Graphics	£7.95
Creative graphics on BBC Micro	£7.50
Disc Drive Projects for Micros	£5.45
DISC FILING SYSTEM (DFS)	
Operating Manual for BBC	£6.95
Disc Programming Techniques	£9.95
Discovering BBC Micro Machine Code	£6.95
Disc System for the BBC Micro	£6.95
Exploring FORTH	£6.95
FORTH on the BBC Micro	£7.50
Functional Forth for the BBC Micro	£5.95
Games BBC Micro Play	£6.95
Graphs & Charts on BBC Micro	£7.50
Hackers Handbook	£4.95
Hackers Handbook - New	£6.95
Handbook of Procedure & Functions for the	
BBC Micro	£6.95
Interfacing & Robotics on BBC	£15.95
Interfacing Your BBC Micro	£8.95
Into View	£4.50
Introduction to COMAL	£9.50
Introduction to LOGO	£6.95
Introducing 'C'	£9.95
Introducing CP/M on the BBC Micro Z80	
2nd Processor	£9.95
Introducing LOGO	£5.95
Introduction to FORTH	£8.95
Introduction to PASCAL	£17.95
ISO - PASCAL Reference Manual	£9.95
Let your BBC teach u to program	£5.45
LISP 2nd Edition	£14.95
LISP, A Beginners Guide to	£10.95
LISP the Language of	
Artificial Intelligence	£9.95
Logo Programming	£9.95
Mysteries of DISC DRIVES and DFS	
REVEALED	£5.95

Mastering CP/M	£17.95
Mastering the Disc Drive	£7.95
Master Advance Reference Manual ..	£19.95
Master Reference Manual Part 1	£14.95
Master Reference Manual Part 2	£14.95
Micronet Handbook	£6.95
Programming the 6502	£16.95
Programming the Z80	£19.95
Sensing & Control Projects for BBC ..	£5.95
S-PASCAL on BBC Micro	£7.50
Structured Basic	£7.95
Structured Prog. with BBC BASIC	£6.50
Terminator Manual	£4.95
The Complete FORTH	£6.95
The Complete Programmer	£5.95

The Epson FX/KAGA PRINTER

Commands REVEALED	£5.95
Turtle Graphics on BBC Micro	£7.50
Using Floppy Discs with BBC Micro ..	£5.95
View 3.0 User Guide	£10
View Guide	£4.50
Viewsheets User Guide	£10
Viewstore User Guide	£10
Using BBC Basic	£4.95
Wordprocessing BBC Beginners Guide ..	£7.95
Wordstar & CP/M made easy	£7.45
Wordwise Plus Guide	£9.95
Z80 Applications	£15.95
Z80 Assembly Language	
Programming	£19.95
Z80 Reference Guide	£9.95

EPROM PROGRAMMER

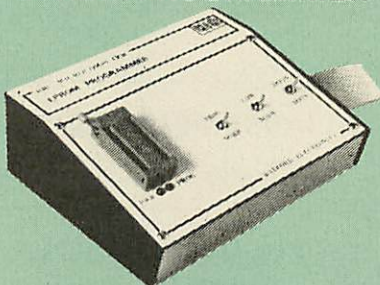

The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed - wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

SOFTWARE PACKAGE

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as on Cassette/disc loading). It is a fully purpose designed and integrated package to simplify ROM development. The system is menu driven with many prompts to avoid any accidents.

Software facilities include:

Load File - Save File - Down Load EPROM - Program EPROM - Verify - Blank Check - Editing of memory contents prior to programming. Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the *ROM filing system. More than one program may be put in an EPROM. All these facilities and more are explained in the comprehensive and clear 15 page manual.

SPECIAL OFFER £69 (£3 carr.)

TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- **ERASER EB** - Standard version erases up to 16 chips. **£28 (carr £2)**
- **ERASER GT** - Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30 (carr £2)**
- Spare UV tubes. **£9**

BEEB VIDEO DIGITISER



Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro. This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£110 (Carr. £3)

(Price includes: Digitiser Unit, Software in ROM & a Comprehensive Manual)
(BBC B+ and Master compatible, except Master with Econet)

Magazine Maker

(As seen on TV)

A combination of the AMX Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within AMX Pagemaker to illustrate magazines or newsletters - in fact anything that needs to be created on A4 size paper. With Pagemaker's many features, a variety of pictures can be composed - the only limit being the imagination.

Pictures can be doctored using Pagemaker's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.

Complete Package £129.00 (carr. £3)

VOLTMACE JOYSTICKS

Delta 3B Single Joystick	£10
Delta 3B Twin Joysticks	£16
Delta 14B Single Joystick	£12
Delta 14B/1 Adaptor Module	£12
Transfer Software Disc/Tape	£7

ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

Price: **£2**

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£6.99**

ATTACHE CARRYING CASE for BBC Micro

The Attache carrying case is attractively finished in mottled antique brown leatherette. The case is made of tough plywood, providing a very solid and safe way to carry your BBC micro. There is room provided to fit all the leads necessary behind the computer and manuals in the front.

Locks supplied with two keys. Price **£13** (£2 carr.)

28 pin ZIF SOCKET (Textool) **£6.95**

28pin DIL HEADER PLUG
SOLDER type **£1.50**
IDC CRIMP type **£1.95**

SPARES for BBC Micro

Keyboard	£46	Keystrip	£2
UHF Modulator	£4	Case	£25
Speaker Grill	£1	Speaker	£2
Power Supply	£59	Keyswitch	£1.50

Replacement FLEXIBLE KEYBOARD CONNECTOR

£3

8way DIP SWITCH **£0.85**

CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50

DISC DRIVE POWER LEADS

Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

DISC DRIVE INTERFACE LEADS

BBC to Disc Drives Ribbon Cable
Single **£4** Twin **£6**

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	80p	200p
BBC Power Plug 6 way	80p	—
Disc Drive Plug 4 way	75p	—
6 way Power Connector	—	95p

Watford Electronics' Dealer's List

UNITED KINGDOM

AKHTER INSTRUMENTS LTD.
Akhter House, Perry Road, HARLOW, Essex

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cirkit Distribution Ltd,
Park Lane, Broxbourne, Herts.

C.J.E. Micros, 78 Brighton Road, Worthing, West Sussex. Tel: 0903 213361.

Gemini Marketing Ltd,
Exmouth, Devon

HCCS, 575/583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel. 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888/9888.

Microman Computers, Rainford Industrial Estate, Mill Lane, Rainford, St. Helens

Peartree Computers Ltd, St. Georges Street, Huntingdon Cambs.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

OVERSEAS DEALERS

Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Alpha Computer Co, Shop 314 Chi Fu Commercial Centre, Chi Fu Fa Yuen, Hong Kong. Tel: 5-506592.

Computer Distribution Company, Parklaan, 47, B09300 Aalst, Belgium.

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Scientex P.V.B.S., Zilvermidstraat 2, B-2000 Antwerpen, Belgium. Tel: 03 233 59 06

Techno-matic Data, Holbergsgade 19, 1057 København K, Denmark

Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland. Tel: (010) 413 8197/414 5171.


Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark. Tel: 08 642522

Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro with the Viglen console unit.

£42 (carr. £4)

4 WAY MAINS DISTRIBUTION SOCKET

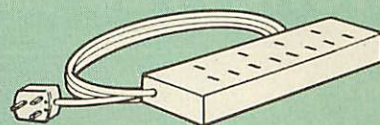

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug. **£9.50** (carr £1.50)

ACORN MUSIC 500

BBCB, B+ & Master Compatible.

Now available, a limited number of Music 500s at give away prices. For under half the normal cost of the Music 5000 (which is, basically, the same hardware) you can receive the music package that has already thrilled thousands.

CHRISTMAS PRICE £66

(carr £4)

Software Disc 'Mu-500' has 13 tunes **Only: £6**

CHIP SHOP

8271	£36	Acorn BCPL	£42
DS3691	£3.50	BCPL Calc Pack	£15
DS88LS120	£5.25	BCPL Stand Alone	£36
LM324	£0.45	Generator	£25
SN76489	£5.50	Basic Editor	£28
SAA5050	£8.75	BROM	£20
UPD7002	£4.40	Buffer & Backup	£22
2764-250nS	£2.00	Beebmon	£25
27128-250nS	£2.50	Beebfont	£36
27512	£18	Acorn COMAL	£32
4013	60p	Acorn FORTH	£25
4020	£0.90	Acorn Graphics	£21
4464	£8	Graphics Extension Rom	£22
4816 RAM	£1.75	GXR-B	£35
6264LP-8K	£3.00	GXR-B+	£42
RAM	£5	Acorn LISP	£42
6502A CPU	£9.75	Acorn LOGO	£42
65C02 3M	£9	ISO Pascal	£30
65C12	£10.00	ISO-Pascal Stand Alone Generator	£28
6512A	£3.40	ICON Master	£52
6522	£5.00	Logotron LOGO	£62
6845SP	£6.00	Micro Prolog	£48
7438	40p	Microtext ROM	£29
74LS00	25p	ROMIT	£13
74LS04	25p	Serial ULA	£15
74LS10	25p	Video ULA	£25
74LS123	80p	TERMULATOR	£21
74LS163	70p	MUROM	£24
74LS244	80p	SLEUTH ROM	£18
74LS245	£1.00	STUDIO 8 Disc	£31
74LS373	£1.00	Toolkit Plus	£49
74LS393	£1.00	Communicator	£16
75453	70p	Disassembler	£27
		Help II	£37
		View 2.1	£56
		View 3.0	£36
		Hi-View	£37
		Viewsheet	£37
		Viewstore	£29
		Viewspell	£25
		Viewplot Disc	£34
		Datagem (Gemini)	

ASSORTED ROMS

ACORN BASIC 2	£19
ACORN ADFS	£25
ACORN DNFS	£17
Acorn OS 1.2	£6
Acorn OS B+	£25

Prices subject to change without notice and available on request. ALL OFFERS subject to availability.

Mail Order and RETAIL SHOP. Trade and Export inquiries welcome. Government and Educational Establishments' OFFICIAL ORDERS Accepted.

Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car Park)

VAT: UK customers please add 15% VAT to cost incl. Carriage.

CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £2 on Larger items. On bulkier items, £7 Securicor charge applies. Overseas orders, carriage is charged at cost.

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

Watford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND
Telephone: (0923) 37774; Telex: 8956095; FAX: 01 950 8989

DISKETTES All discs guaranteed (lifetime warranty)

5 1/4"		10's	50's
40tk DSDD		£9.50	£38.00
80tk DS Quad		£10.00	£40.00
Bulk unbranded 48tpi, DSDD - 55p per thousand			

3 1/2"		10's	50's
SS 135tpi		£18.00	£76.00
DSDD		£76.00	£80.00
Bulk unbranded 135tpi, DSDD - £1.45p per thousand			

**ALL DISKETTE PRICES
INCLUDE VAT + P&P**

ALL-TEC LTD (AU)

**84 Highfield Road,
Romford, Essex RM5 3RU
Telephone: 0708 27043**

WALTHAMSTOW MASTERS

**BBC MASTER MICRO
ACORN PRODUCTS
DISC DRIVES
MONITORS
PRINTERS
SUPPLIES
SOFTWARE
REPAIRS**

MICRO SERVICE

**19 Walthamstow Business Centre
Clifford Road, London E17 4SX
Telephone 01-531 9070**

AA277

BBC/ELECTRON 'IMAGE' V.2

**'IMAGE' was the ultimate tape back-up copier
now, it's even better**

You can be completely assured that this is the best and most able program of its type available. It can deal with:

- * Locked programs
- * Programs of any length
- * 300t and 1200 BAUD
- * Files
- * ?'s (Ctrl codes) in Filename
- * Multiple copies
- * False or trick block info.
- * Changing Filename†
- * Continuous data stream†
- * Locking and unlocking programs

It is VERY IMPORTANT INDEED purchasers take note that 'IMAGE' is for sale strictly for making BACK-UPS of your own software for your own use, for protecting your own programs, or as an aid to putting software on disk. Any person found using the program for illegal purposes runs the risk of being prosecuted.

To receive your copy of 'image', send a cheque or P.O. for the sum of
An Astounding £5.80 to:

**Peter Donn, Dept. (AU) 18 Tyrone Road,
Thorpe Bay, Essex SS1 3HF**

Please state BBC or Electron version. V.1 owners can obtain V.2 by sending £1.50 + V.1
AA296 without case tBBC version only

**FREE MICROLINK
REGISTRATION
WITH EACH
MODEM SUPPLIED**

DEMON modem

**NEW MASTER VERSION NOW
AVAILABLE**

DEVILISHLY CLEVER FEATURES

Auto Answer

The Demon answers, then unloads or downloads data into your micro and printer just like a telex.

Auto Dial

Numbers dialled by the micro. Doesn't even need a telephone attached.

Auto Redial

The dial disk allows you to set your favourite numbers and keeps dialling until you are connected.

**Full UK, European & USA
CCITT V21 & V23 Bell 103 & 202**

Baud Rates

300/300 Bulletin Boards, etc.
1200/75 Prestel, Micronet, etc.
75/1200 Reverse Prestel, etc.

Bulletin Board Facility

Start your own contact information boards throughout the world.

PSS

Packet Switching Service lets you dial worldwide databases for the cost of a local call.

Complete with Plugs + Leads

For telephone, BBC 5 pin DIN RS423 and mains power supply.



**Still
the lowest
cost fully
automatic
modem at**

£59.95
plus VAT & p&p

EASY TO USE?

You don't need to know anything about baud rates or protocol or 'handshaking' simply plug it in and talk to the world.

Direct from the Manufacturer

By selling it directly we are able to offer it at this low price and still give you support should you need it.

We also have complete control of the quality and build it to the same standards as the products we supply to BT and whilst this modem is not yet BT approved the components we use are.

We also offer a money back guarantee now extended to 12 months for registered users.

PROHIBITED from direct or indirect connection to public telecommunication systems. Action may be taken against anyone so connecting the apparatus.



Dataphone Ltd., 92 The Plain, Epping, Essex
CM16 6TW. Tel: (0378) 78047

Please send me:

..... (Qty) Demon Modems @ £72.39
..... (Qty) Demon BBC ROM @ £24.

BBC Model B ☐ Master ☐ Please tick
or Special Offer

..... (Qty) Demon Modem and ROM @ £94.95
..... (Qty) Demon Dial Disk @ £4.95

..... (Qty) Demon Adaptors (allows telephone
and modem to plug into same socket)
@ £5.25

I enclose a cheque to the value of £

or ☐ No.

Signature

Name

Address

Postcode (please print)



PEARTREE'S

1st ANNIVERSARY

SPECIAL OFFER



Dear Customer

As part of our **First Birthday** celebration, we are offering a new **PEARTREE PRIVILEGE CARD**. It's our way of saying 'thank you' for your support and patronage over the last year. You represent our **future** and we hope that we can play an increasingly useful part in **yours!**

Your **Privilege Card** will cost you just £5—less than 10p a week—and for this you will receive **service and prices** which will be second to none:

- First, you will receive a **5% discount** on all our advertised goods, and up to **25% discount** on all repairs.
- You will be sent **immediate details** of all new products.
- Your order will be given **priority**.
- You will have access to our **Technical Hotline**, to help with any problems you may have.
- At the end of each year we will send you a **Gift Voucher** to the value of 1% of the goods you have purchased during the year.

All the benefits of this **Privilege Card** can be yours for just £5.00 per year; and as an added bonus, we will give you a **Gift Voucher** worth £6.00 when you introduce us to two of your friends who join the membership before 30th November.

So please hurry and fill in the form opposite, mail it **FREEPOST** to our address and immediately we will send you your application so you can **take advantage of the savings** for **Christmas** time.

Yours sincerely

V.G.M. Marketing Director

P.S.: The gift vouchers are only valid for purchase from Peartree. This Privilege Card offer is for private or company computer users, not for Educational and Governmental departments.



Dear Peartree,

Please rush me an application for your Privilege Card.


Name _____

Address _____

Telephone _____

Send this coupon to:
Peartree Computers, Department 80,
FREEPOST, St George's House, 14
George Street, Huntingdon, Cambs
PE18 6BR.

PEARTREE

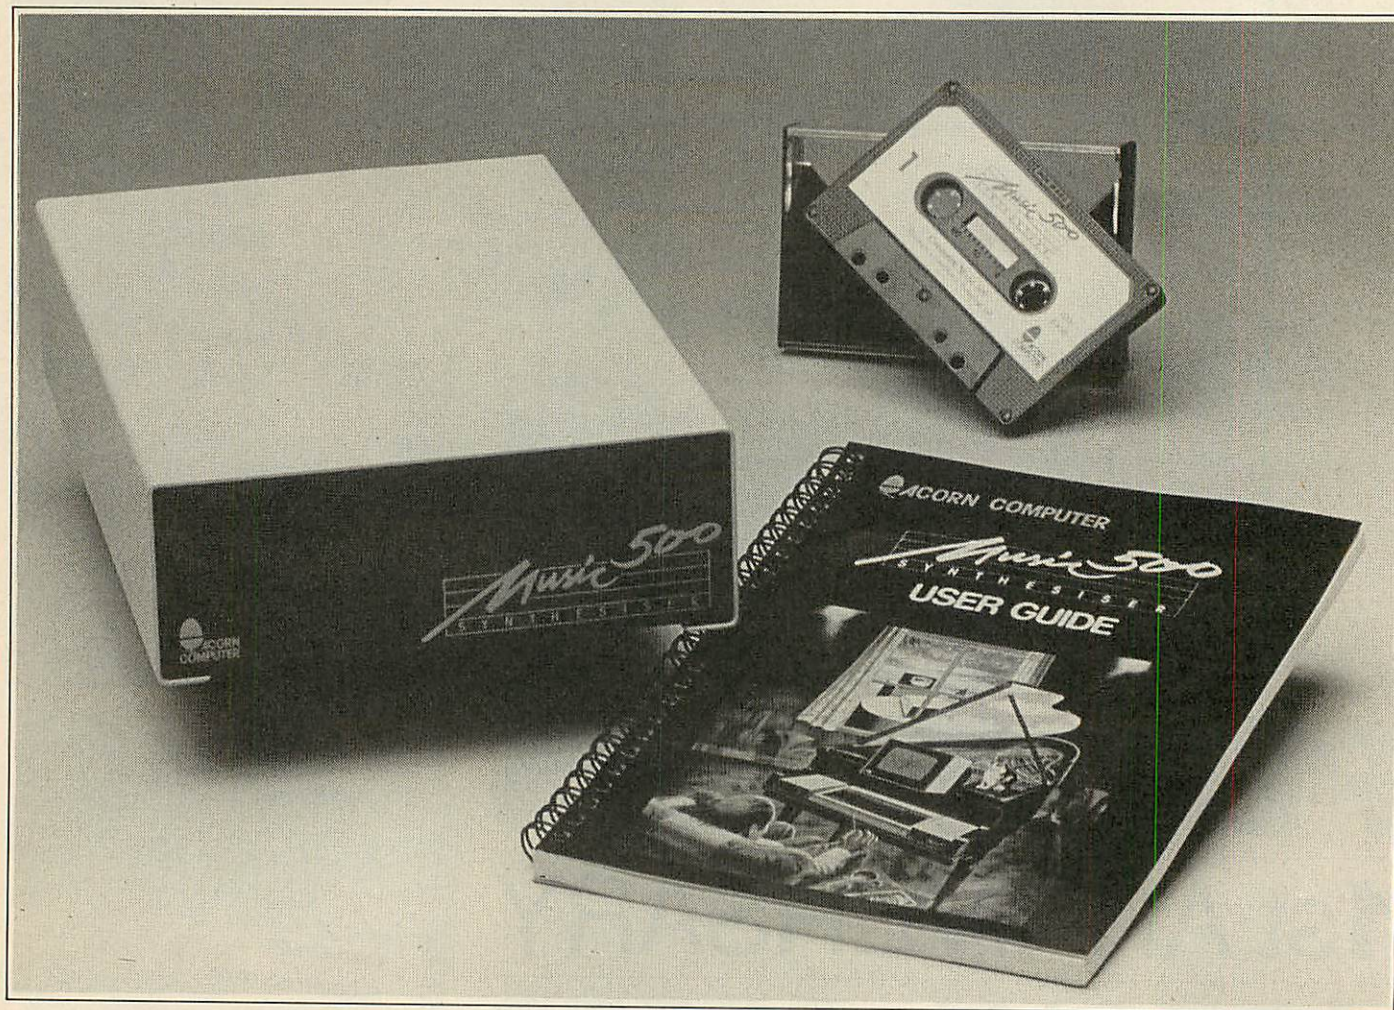

THE ACORN MUSIC 500

Dear Customer

If you think that Music 500 is the same as Music 5000, but with a different front panel and different software, then think again.

Why pay £72.00 when you can pay

£39.95

Excluding VAT for the Music 500

Will this solve the mystery?

HP249

PLEASE USE OUR CODES WHEN ORDERING

PEARTREE COMPUTERS LTD, ST. GEORGE'S HOUSE, 14 GEORGE STREET, HUNTINGDON, CAMBS. PE18 6BD TELEPHONE (0480) 50595

PEARTREE

SOUNDS SPECTACULAR



**ONLY
£140
EXCLUDING VAT**

HYBRID

**MUSIC
5000
SYNTHESISER**

Take it home—Plug it in to your computer and hi-fi system and start to make spectacular sounds using up to 16 sounds at once selected from the many preset instruments, waveforms and envelopes provided.

The new AMPLE Rom easy to use,

powerful and versatile menu driven music language. Includes 'Island Logic' music system style of Staff Editor. The Music 5000 synthesiser is now compatible with BBC B, BBC B+ and Master 128.

HP19

Music 5000. It has been upgraded from Music 500 with modifications on the main PCB board.

Dealer enquiries welcomed. We accept Education and Government orders.

All prices are exclusive of VAT. Please check on back page how to order.

PLEASE USE OUR CODES WHEN ORDERING

PEARTREE COMPUTERS LTD, ST. GEORGE'S HOUSE, 14 GEORGE STREET, HUNTINGDON, CAMBS. PE18 6BD TELEPHONE (0480) 50595

HARDWARE

HC2 BBC MASTER 128 £424.00

- 128K
- Complete with View, Viewsheet, A Basic editor, Termulator, ADFS, 1770 DFS and Basic
- Battery backed up RAM
- Two ROM cartridge sockets
- Numeric keypad

HC3 MASTER COMPACT £385.00

- 128K Computer
- 640K disc drive built into a monitor bridge
- Available with mono or colour monitor
- RGB, comp video, joystick and printer port
- Includes Sprite ROM, View, Filing System etc.

HC4 BBC B+ 128K £325.00

- 64K BBC Basic
- Sideways RAM
- 1770 DFS

HC5 BBC B inc DFS £305.00

- 32K computer
- Includes Acorn DFS

HC7 512K UPGRADE £329.00

- IBM compatible
- DOS+
- 80186 processor
- Use with disc drives or Winchester

HC6 TURBO UPGRADE FOR MASTER £102.00

- 65C102 second processor
- 4MHz
- 64K RAM extra
- Hi-Basic
- Hi-Editor
- Printer buffer software

HP19 MUSIC 5000 £140.00

- Compatible with BBC B, B+ and Master
- Complete with ample on ROM
- Multi user-friendly input modes for ease of use
- 16 channels
- Includes a step-by-step beginners guide

HP9 ROM CARTRIDGE £13.00

- Takes existing ROM software in cartridge form
- Cuts down opening of machine to insert ROMs

HP10 1770 DFS UPGRADE FOR BBC B £39.00

- Allows BBC to access disc drives
- Will take ADFS for double density

HP11 ADFS ROM FOR 1770 OR BBC B+ £29.00

- For use with BBC B+
- For BBC B with 1770 DFS kit
- Double density
- Hierarchical filing structure

HP12 64K UPGRADE KIT FOR B+ £35.00

- Upgrades B+ to 128K
- Sideways RAM

HP21 32016 CO-PROCESSOR £1295.00

- 32 bit processor
- Complete with Fortran, Iso-Pascal, Cambridge Lisp, Panos, C, BBC Basic & 32016 Assembler
- 1 megabyte RAM

HP18 6502 2nd PROCESSOR £179.00

- Complete with 64K Hi-Basic
- Compatible with B, B+ and Master

HP20 Z80 2nd PROCESSOR £329.00

- 64K CPM
- Complete with vast range of business software

ECONET

HC23 BBC MASTER ET 128K £320.00

- No DFS
- Econet station
- 128K memory

HP24 ECONET MODULE FOR MASTER 128 £43.00

- Upgrades Master 128 for networking
- Easy to install plug-in module

HP25 ECONET KIT £55.00

- Upgrades BBC B or BBC B+ (please specify when ordering)
- Must be professionally fitted

HP26 10 STATION LEAD SET £25.00

HP27 ECONET STARTER KIT £79.00

HP28 ECONET SOCKET KIT £29.00

HP29 PRINT SERVER £40.00

- Allows a BBC to be a printer server when Econetted

HP35 10 MEG WINCHESTER WITH FILE SERVER £999.00

- Plus into 1 meg bus
- Complete with ADFS and file server manuals
- Built in fan and power supply

DRIVES

All Disc Drive Now Have A TWO YEAR WARRANTY

HP30 SINGLE DISC DRIVE without PSU £113.00

HP31 SINGLE DISC DRIVE inc PSU (MITSUBISHI) £134.74

HP32 DUAL 40/80TK DRIVES (MITSUBISHI) without PSU £226.00

HP33 DUAL 40/80TK DRIVES inc PSU (MITSUBISHI) £260.00

HP34 DUAL DISC DRIVES (MITSUBISHI) £280.00

- In monitor bridge (Master size)
- Built in power supply

HP37 400K DISC DRIVE AND 20 MEGABYTE WINCHESTER £866.00

- In monitor bridge (Master size)
- Built in fan and power supply
- Other size Winchester available

PRINTERS

SPECIAL OFFERS

PD38 EPSON RX100+ £179.00

- 100 CPS wide carrier printer
- IBM compatible
- Extremely robust
- Complete with tractor feed

PW49 JUKI 6100 PRINTER £250.00

- 18CPS
- Standard ribbons
- Very reliable
- Centronics interface

PD217 MP165 DOT MATRIX PRINTER £199.00

- 165CPS draft print
- 38CPS near letter quality
- Built in tractor feed
- Epson compatible
- Downloadable character sets

PD39 EPSON LX80 £225.00

- 100 CPS
- NLQ mode
- Centronics interface

PP52 EPSON LX80 TRACTOR FEED £18.00

PP54 EPSON LX80 SHEET FEEDER £49.00

PD40 EPSON FX85 £399.00

- 160 CPS
- Downloadable character set
- Centronics interface

PD41 EPSON FX105 £499.00

- As above with wide carriage

PD53 EPSON FX85 TRACTOR FEED £37.00

PD42 EPSON LQ800 £595.00

- 24 pin head
- 180 CPS
- Excellent near letter quality

PD43 EPSON LQ1000 £795.00

- Wide carriage version of above

PW218 KAGA TAXAN KP810 £299.00

- Low cost NLQ printer
- Built in tractor feed
- 160 CPS

PD44 KAGA TAXAN KP910 £389.00

- Wide carriage version of above

PD45 BROTHER M1509 £399.00

- 180 CPS
- Built in tractor feed
- RS232 and Centronics interface
- IBM compatible
- Full international character set
- Epson compatible

MONITORS

Colour

SUPER VALUE

HP57 HANTAREX COLOUR MONITOR £179.00

- Medium resolution
- RGB interface
- Composite video and sound input
- Anti-glare filter

HP58 MICROVITEC 1451 COLOUR £245.00

- Medium res monitor
- Metal or plastic case
- RGB interface
- Complete with cable for BBC

HP59 MICROVITEC 1451 A/P £275.00

- As above with audio and composite video input

HP60 MICROVITEC 1441 COLOUR £450.00

- High resolution monitor
- 895 pixels
- RGB interface

HP61 TAXAN SUPER VISION 3 £349.00

- Compact 12" super high resolution RGB colour display
- Text switch gives green display
- Super high contrast tube
- 640 X 252 line resolution
- 0.37 dot pitch

Monochrome

HP64 HANTAREX BOXER £79.00

- High res green monitor
- As preferred by educational establishments

HP65 KX1201 KAGA GREEN (P31) £89.50

HP66 KX1202 KAGA GREEN (P39) £95.50

HP67 KX1203 KAGA AMBER (PUL) £95.50

- P31 standard persistence
- P39 long persistence
- PUL long persistence
- Greater than 20MHz bandwidth
- Flat 635R tube
- 1000 line resolution at centre

All prices are exclusive of VAT. Please check on back page how to order.

PLEASE USE OUR CODES WHEN ORDERING

PEARTREE

LEADS

HP122 BBC TO TV	£1.25
HP123 BBC TO GREEN MONITOR	£2.95
HP124 BBC TO SONY/KAGA COLOUR MONITOR	£5.95
HP125 BBC TO MICROVITEC	£2.20
HP126 PHONO TO PHONO	£1.25
HP127 BNC TO BNC	£2.95
HP128 BBC TO CASSETTE	£2.25
HP129 BBC TO ACORN CASSETTE	£2.25
HP130 BBC TO CENTRONICS PRINTER	£9.95
HP131 BBC TO SERIAL PRINTER	£8.95
HP132 4 WAY MAINS TRAILING SOCKET	£9.50
* Including two metre extension cable plus plug	

MODEMS

HP133 PACE NIGHTINGALE	£109.00
* 1200/75 75/1200 300/300 baud rates	
* British Telecom approved	
* Complete with cable for BBC computer	
* Socket for through connection of telephone	
HP134 PACE NIGHTINGALE COMBO	£129.00
* As above with Commstar software	
HP135 PACE ACCESSORY BOARD	£42.00
* Autodialler	
* Auto baud rate selection via software	
* Autoanswer for your own bulletin boards	
* Built in loudspeaker for monitoring	
HP136 PACE AUTODIAL DISC	£9.00
* Sets up Commstar for autodial	
* Stores favourite numbers	
HP137 PACE OBBS COLOUR BULLETIN BOARD SOFTWARE	£20.00
* To be used with the accessory board	
* Create your own bulletin board	
* Create your own office answering service	
HP138 MINOR MIRACLES WS2000	£125.00
* Full range of baud rates	
* British Telecom approved	
* 25 way RS232 input	
HP139 CABLE FOR MODEM	£5.00
HP140 WS2000 AUTODIAL CARD	£30.00
HP141 CABLE FOR AUTODIAL	£4.00
HP142 SK1 KIT	£10.00
HP143 WS2000 AUTOANSWER KIT	£30.00
HP144 WS3000 V21/23 MODEM	£285.00
* Hayes compatible	
* Intelligent speed buffering	
* Line noise filtering	
* Internal battery backup allows 63 names and numbers to be stored	
* Printer port for direct connection to a printer	
* Includes cable	

SUPPLIES

CR148 RIBBONS FOR DOT MATRIX PRINTERS	£4.50
* FX/MX80/LX80 printer	
* Juki 5510 printer	
* MP165 printer	

CR151 RIBBON FOR KAGA KP810/CANON PW1080	£5.00
--	-------


CR152 RIBBONS FOR 132 COL PRINTERS	£7.00
* FX100/RX100 printers	

BOOKS

BC161 THE EPSON PRINTER COMMANDS REVEALED	£5.95
* A must for all printer users	
* Commands for all Epson compatible printers	
* Easy to understand commands	
* Detailed explanations	
BC162 MASTER REFERENCE PART ONE	£14.95
BC163 MASTER REFERENCE PART TWO	£14.95
BS164 VIEW MANUAL	£10.00
BS165 VIEWSHEET MANUAL	£10.00
BU166 DFS OPERATING SYSTEM MANUAL	£6.95
BU167 ADVANCED USER GUIDE FOR BBC	£14.95
BU223 ADVANCED SIDEWAYS RAM USER GUIDE	£9.95

MAIN EDUCATIONAL SUPPLIER
We accept Government and Educational orders. If there are any products not listed above that you require, please enquire.
All books are not subject to VAT.

MEGAMOUSE

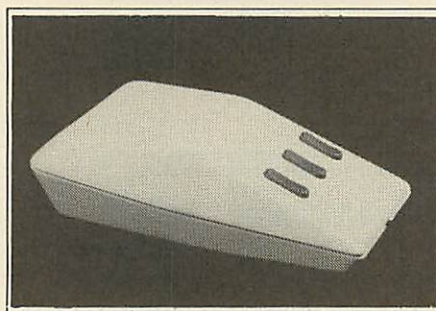

HP229 MEGAMOUSE	£49.00
* High quality UK manufactured	
* Highly accurate	
* Slip free rubber coated ball	
* Fully AMX compatible	
* Because of all of this it is a popular AMX replacement	
HS230 MEGAMOUSE AND SUPERART	£95.00
HS231 MEGAMOUSE AND PAGE MAKER	£95.00
HS232 AMX MOUSE WITH NEW SUPERART ROM AND DISC	£65.00
SG233 AMX DESK	£19.00
SG234 AMX UTILITY	£11.50
SG235 AMX SUPERART	£43.00
SG236 AMX PAGE MAKER	£43.00
SG237 AMX 3D ZICON	£21.00
SG238 AMX DATABASE	£21.00
SG239 AMX XAM	£21.00

HP240 WATFORD ELECTRONICS BEEB VIDEO DIGITISER	£99.00
--	--------

- * Input from any 1V video source
- * Can be used with Artist package
- * 1.6 seconds scan time
- * Slow scan television; sending images via a modem or radio
- * Security
- * Full resolution in modes 0, 1 and 2
- * Up to 8 grey levels
- * Manual or auto level control
- * Connects to user port
- * ROM software supplied

HS241 MAGAZINE MAKER	£125.00
----------------------	---------

- * Watford video digitiser and AMX Pagemaker
- * Pictures produced by digitiser can be doctored to make up pages complete with text
- * Complete package at a bargain price

THE ARTIST

Artist is a new 16k language ROM compatible with the BBC Micro, BBC+ and the new Master Series, allowing full manipulation of a mode-2 screen.

Copying specific screen areas to exclude certain colours. Drawing and painting underneath any colour combination. Making your brush cycle through a defined colour sequence. Colour pattern editing. Sprites of any size. Animation. Just a hint of how Artist is the most highly advanced software package yet designed, with features never before seen on the BBC Micro.

With the ultimate in art packages comes the ultimate mmouse—Megamouse. Built to professional standards and comfortably shaped, it provides sensitive, accurate movement, that is unbeatable.

This exclusive Pear Tree offer includes the Artist ROM, the systems disc, a user's manual and an excellent grey shade Epson printer dump.

You have the option of buying the megamouse separately, or saving £10 by buying the complete package.


THE ARTIST
A masterpiece in
colour graphics for only
£85

The Artist is compatible with the AMX Mouse and the Megamouse is compatible with the AMX Software.

SG242 ARTIST SOFTWARE	£45.00
HP229 MEGAMOUSE	£49.00
HS243 ARTIST AND MEGAMOUSE	£85.00

All prices are exclusive of VAT. Please check on back page how to order.

PLEASE USE OUR CODES WHEN ORDERING

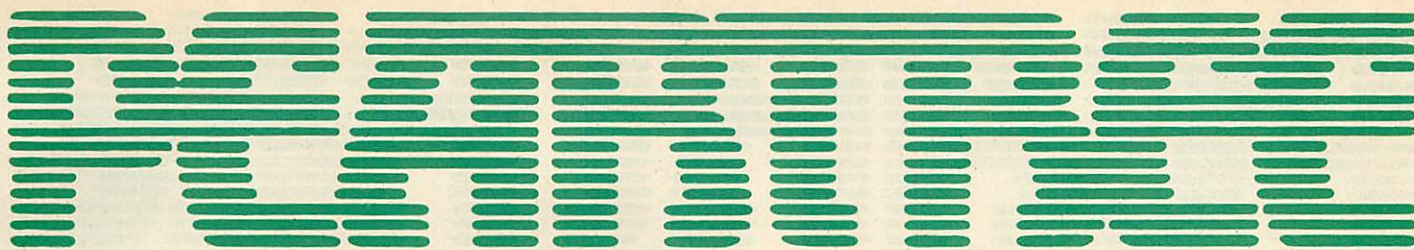


Add 128K ROM to your Master

The MR6000 ROM board provides the user with 4 extra 16K ROM sockets (fit two and increase the capacity to 8 ROM sockets)—a powerful addition, only,

£9.95

HP259

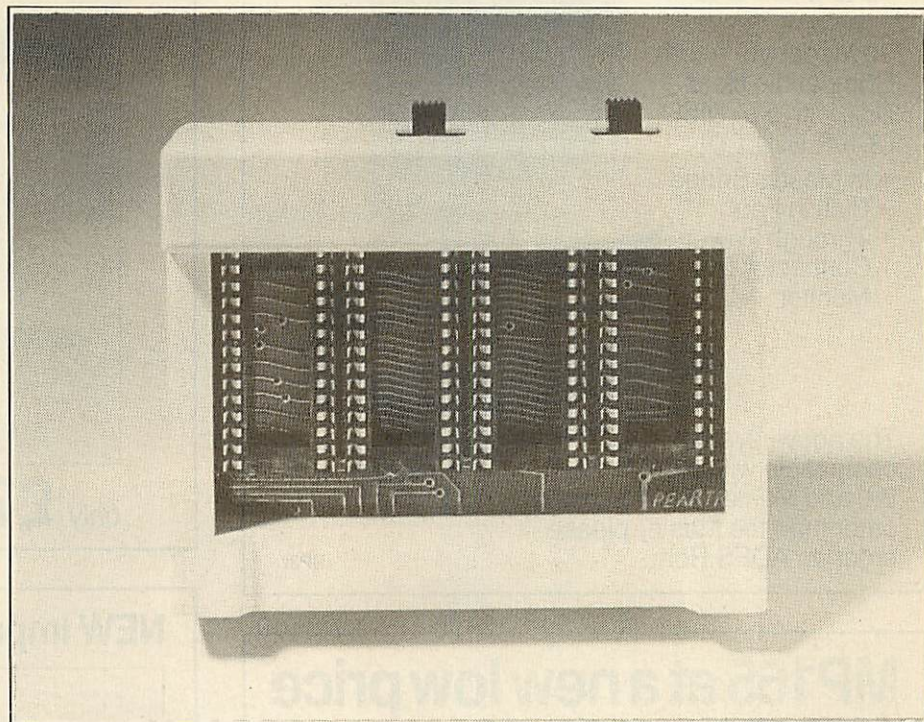

**PEARTREE
COMPUTERS**

32K Write Protectable RAM for your Master


Each 32K board comes complete with software (all menu driven), write protect switch and a comprehensive manual, so it's easy to fit and use, with an attractive casing, it even looks good!

The MR7200 from Peartree only

£26.95

including 32K RAM

HP258

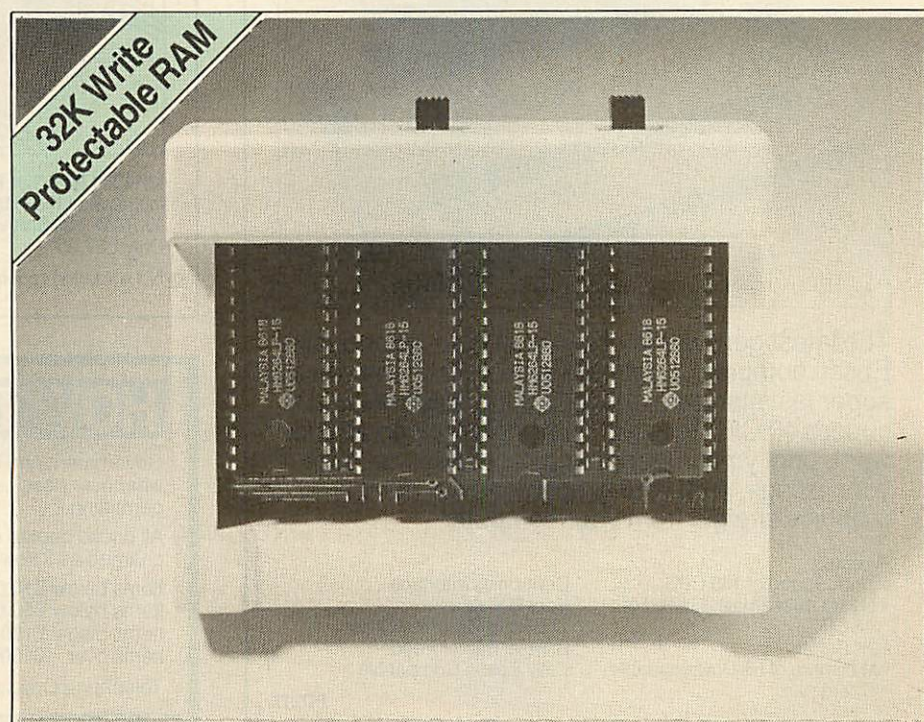

All prices are exclusive of VAT.

Please check on back page how to order.

PLEASE USE OUR CODES WHEN ORDERING

PEARTREE

The All in One System £866.00

20 Megabyte Acorn
Compatible Hard
Disc with 5 1/4" DISC
DRIVE BUILT IN


- ★ In Master Bridge
- ★ Built in Fan
- ★ Through Power
Connector for
Monitor



The above system is
compatible with BBC B, BBC
B+ and Master. For machines
other than the Master please
order an ADFS Rom.

HP37


IN STOCK NOW Pear1 Master Cartridge

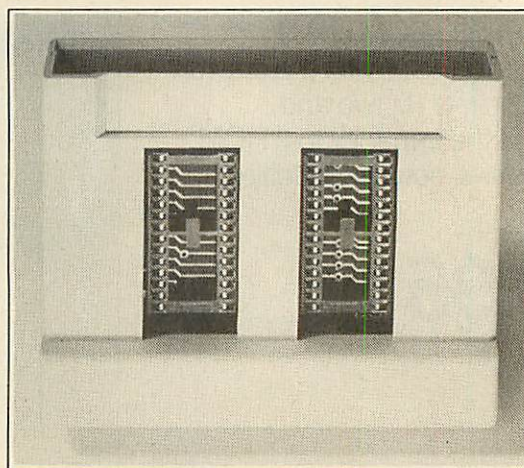

only **£7.95**

HP8

MP165 at a new low price of £199

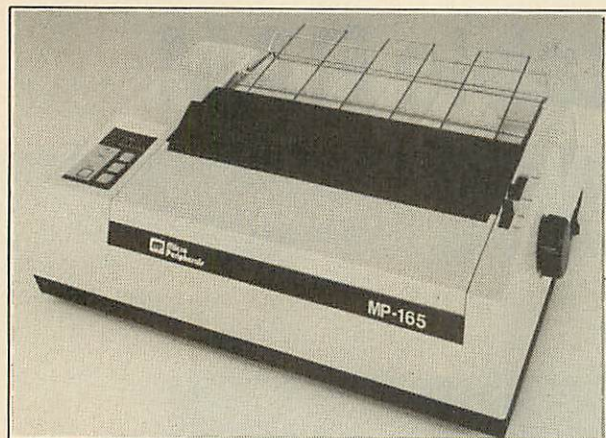


The latest generation of low cost near letter quality
Epson compatible dot matrix printers giving you a
super fast standard quality print at 165 CPS and a
superb 40 CPS in NLQ. This printer will do all your
work, print your important correspondence, print
your listings, print your graphs or even dump
graphics straight from your computer.

Features

- ★ Draft Speed of 165 CPS
- ★ Near Letter Quality Speed of
38 CPS
- ★ 2K Buffer
- ★ Maximum of 95 Downloadable
Characters
- ★ Centronics Interface
- ★ Very Reliable
- ★ Excellent Graphics Quality
- ★ Built in Tractor Feed
- ★ Fully Epson Compatible

PD217

NEW Improved MR3000 & MR4200

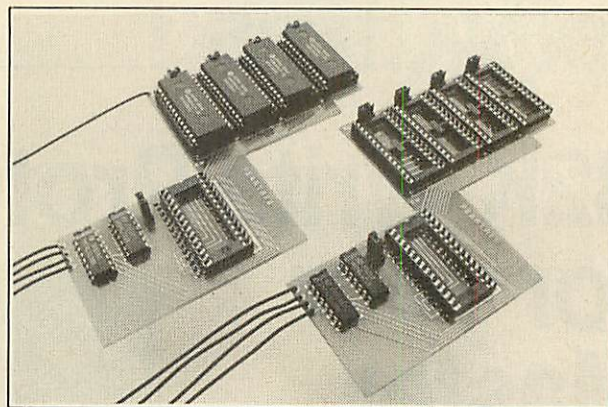

MR4200 Mini 32K Ram Board:
Inclusive of the Hitachi 6264LP-
15 RAM. Full Software inclusive.
Only £27.00 **HP228**
No soldering required

MR3000 Mini-Rom Board:
Gives 4 extra ROM sockets on
BBC 'B'.
Only £14.00. Full instructions
enclosed. **HP227**

HOW TO ORDER

Government and Educational orders are welcome. Orders will
whenever possible be despatched on the same day, stock
permitting.

All prices quoted exclude VAT and P & P. Postage will be
charged as follows:

Items below £10.00	add £1.50
Items below £50.00	add £2.50
Items below £100.00	add £3.50
Items over £100.00	add £8.00

We accept



Telephone Orders: (0480) 50595

PLEASE USE OUR CODES WHEN ORDERING

PEARTREE COMPUTERS LTD, ST. GEORGE'S HOUSE, 14 GEORGE STREET, HUNTINGDON, CAMBS. PE18 6BD TELEPHONE (0480) 50595

Freedom of the press.

WORKS WITH
KEYBOARD
JOYSTICK OR
AMX MOUSE

AMX Pagemaker puts you right at the heart of the desktop publishing revolution.

At long last you can produce newspapers, posters, leaflets, notices and handouts in your own school, home or office.

We're not talking about amateurish results, but extraordinarily professional work with crisp text and exciting graphics.

It's the sort of 21st Century technology that's turned Fleet Street upside down and is part of the most exciting advance in publishing since Gutenberg and Caxton.

You can type directly onto your screen with a choice of 16 typefaces or, if you really want to be creative, you can design your own typefaces, and, just like the most advanced computer setting, you can centre, range right, left or choose literal justification. You can even have full pixel control over character size and spacing.

Alternatively, you can load in 'wordwise' and 'view' files with fully automatic on-screen text formatting.



EXTRA! EXTRA!

Using the patterns supplied, you have outstanding graphics facilities for drawing, spraying and painting, or you can achieve some incredible results, using your own pattern designs.

The cut and paste options include copying, moving, rotating, stretching plus a fantastic zoom facility.



DIGITISED PICTURES SUPPLIED BY KEN WARWICK, PARKSIDE DEVELOPMENTS: 01-600 5701.
MAGAZINE MAKER INCLUDES AMX PAGEMAKER AND VIDEO DIGITISER WHICH IS OBTAINABLE FROM WATFORD ELECTRONICS: 0323 37774/40568.

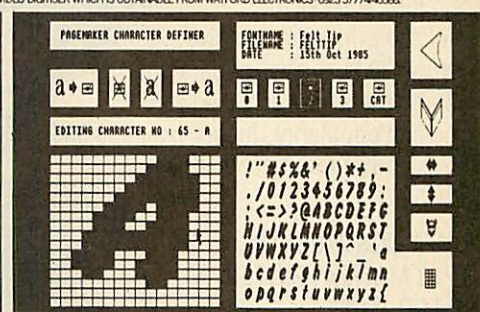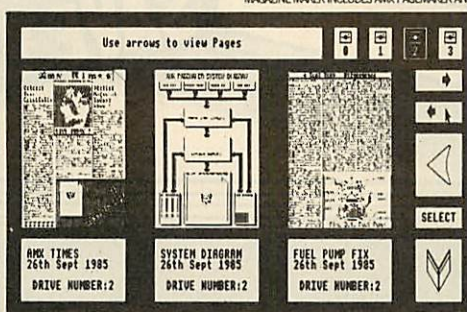

— PROCESSOR —

— PREVIEWER —

— FONT DEFINER —

A complete mode conversion program is included, allowing you to load in drawings and digitised pictures from all BBC graphic modes.

HOLD THE FRONT PAGE

The 'Previewer' gives you total quality control over your work, allowing you to view three pages at any time before your work is output to the printer. And there's a wide range of printers, including Epson FX/RX/LX/LQ, Canon PW1080, Kaga KP810, Mannesman Tally MT-80+, Seikosha SP 1000A, Star Delta and Star SG10.

AMX Pagemaker consists of two Roms with two discs or just three discs on Master 128.

Coming complete with a comprehensive manual, AMX Pagemaker costs a mere £49.95 and is available from all good computer dealers or direct from the address below.

AMX Pagemaker — your opportunity to publish and be damned!

FOR INSTANT ACCESS/VISA ORDERS TELEPHONE 0925-413501/2/3

PLEASE RUSH ME POST FREE (Quantity) AMX PAGEMAKER PACKAGE/S AT £49.95 each INCLUDING VAT AND P & P

I ENCLOSE CHEQUE/POSTAL ORDER FOR £

OR DEBIT MY ☐ ACCESS ☐ OR ☐ VISA ☐ (tick as appropriate)

CARD No.

EXPIRY DATE

SIGNATURE

NAME (Block Capitals Please)

ADDRESS

POSTCODE

AMX PAGEMAKER

IMAGINATION AT YOUR FINGERTIPS

SEND TO: ADVANCED MEMORY SYSTEMS LTD., FREEPOST, WARRINGTON WA4 1BR.

YOU'LL NEVER SEE A BETTER OFFER IN PRINT.

Only now and again is the discerning computer user offered a real bargain. This is one of those times and our offer can only be available whilst promotional stocks last. For those wishing to obtain a truly professional printer with genuine discounts up to 50%, this may be your last chance. Order now.

A SINGLE LETTER OR A 1000 PAGE ► REPORT NEC PINWRITER P1.

■ Pinwriter P1 is a member of the proven and popular NEC Pinwriter range. This low cost, compact, 18 pin printer is ideal for personal and business use. Pinwriters have the legendary reliability of NEC's printers. Using modular construction, the P1 is easy to service resulting in a low life cycle cost.



SAVE £204.00

- 180 CPS Hi-speed mode
- 90 CPS NLQ
- 18 pin print head
- High resolution graphics
- Centronics parallel interface
- Detachable tractor
- International character sets

SRP £399.00
Special price

£195.00

THE ULTIMATE IN LETTER QUALITY ► PRINTING. NEC SPINWRITER 2000

■ When it comes to word-processing printers, few will argue about the superb quality and reliability which makes the Spinwriter the best value for money in today's printer market place. When you see for yourself the print quality of the Spinwriter 2000, you will understand why Spinwriters have achieved a truly astonishing popularity. In fact, over 250,000 are in use throughout the business world.



SAVE £200.00

- 23 CPS
- Modular interfaces IBM, serial and parallel
- Paper width up to 16 inches
- Over 100 language/character sets
- Exchangeable print thimbles
- 2K buffer

SRP £399.00
Special price

£199.00

THE LOW-COST, HIGH ► OUTPUT MATRIX PRINTER. SAMLECO DX 85

■ The DX85 offers an incredible number of features for its price. Out-performing printers costing twice as much the DX85 represents outstanding value. Robust construction, latest technology, ribbon cartridge or spools, plug in interfaces, free dust cover and lots more.



SAVE £88.00

- 120 CPS
- Epson, IBM compatibility
- Parallel, serial and Commodore interfaces
- Full graphics
- Combined friction and tractor feed
- Automatic paper loading
- Range of languages

SRP £217.00
Special price

£129.00

Also available: DX 86, same specifications with additional NLQ (35 CPS). **£139.00**

■ HOW TO ORDER

Offers are available only whilst promotional stocks last. Prices are exclusive of VAT. Please add 15%. Plus carriage charge of £5.00 per printer. All deliveries despatched within 24 hours of receipt of order and payment. Please state interface required. All printers carry 90 days full warranty.

Mills Associates Ltd

SUPPLIES & PERIPHERALS DIVISION.
WILFORD INDUSTRIAL ESTATE, RUDDINGTON LANE, WILFORD, NOTTINGHAM.
TEL: (0602) 818222 TELEX: 37134

BASIC BUILDING BLOCKS

Joe presents a set of standard procedures and functions which can be used to build up programs

Joe Telford

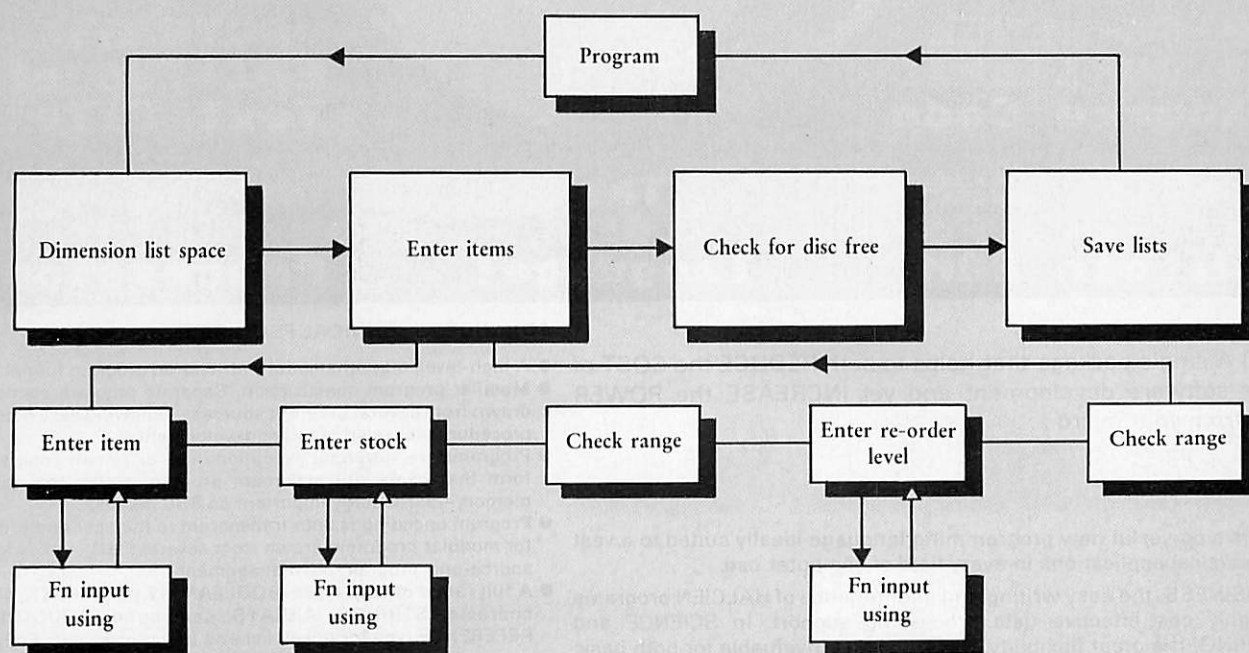


Figure 1a. A structure diagram to illustrate how the main parts of a program tie together

Did you read the news item in September's *AU* reporting on the government committee that had complained about the poor quality of teaching using Basic? Well! Regular readers will know that *Acorn User* regards all programming as a necessary part of the skills needed to solve problems. The language we use is largely irrelevant to the problem-solving activity.

Sadly, while I would enjoy writing articles on programming in Comal or Logo, it would be unfair to many users who don't have these languages. Indeed, while micros are sold only with Basic, it is difficult to give readers a diet which provides easy access to another language. So while Basic may

be bad, it's what exists. Recent moves with Logo on the Compact front may lead to an expansion into other languages, but we in *Acorn User* must keep our feet firmly on the floor in terms of our expectancy of users converting *en masse* to a 'better' language. Before continuing, may I conduct a grass-roots survey? Why not write to us and say which languages you have, and which you would buy if more articles were written?

The best language?

If you are still interested in choosing the best language, then problems exist, even for our government committee. Rather than say what is the best programming language, I rang a few people 'in the know'

and asked them what they thought:

- A primary school teacher said Logo.
- A Scottish friend teaching 15 year-olds said it was Comal.
- A local poly lecturer said Pascal.
- A senior programmer in a national software house said C.
- A software company supporting BBC micros said 6502 Assembler.

Each of the above was able to say why the others were no good and, surprisingly, I found it difficult to find any home users with good applications for Forth, Fortran, Cobol, Algol, or BCPL.


Does this mean that Basic is really far out of favour with everyone? The answer seems to be no, but we are so geared up to knowing that we should be looking for the best language, that we ignore and/or criti-




HALCIEN



**MAXIMUM
PROGRAM
POWER**



**MINIMUM
PROGRAM
COST**



**HIGH-LEVEL
ALGORITHMIC
Source Code**

**AUTOMATED
EDITING of
Text Files**

**VERY COMPACT
Encoded Form
Within RAM**

**The
GLOBAL
language!**

**ICON - based
3D GRAPHICS
Processing**

AT LAST! A single package that helps to both REDUCE the COST of computer software development and yet INCREASE the POWER available from your micro . . .

HALCIEN is a powerful new programming language ideally suited to a vast range of practical applications in every field of computer use.

Within BUSINESS, the easy writing and maintenance of HALCIEN programs allows highly cost-effective data processing support. In SCIENCE and ENGINEERING, the great flexibility of HALCIEN is invaluable for both basic research and product development. Within EDUCATION, the modern structure of HALCIEN encourages student use of the good programming methodology and practices that will hallmark the quality software engineers of tomorrow.

HALCIEN has a complete range of general-purpose programming language features (see opposite) plus a powerful suite of built-in keywords that support AUTOMATED TEXT FILE EDITING along with both TWO and THREE DIMENSIONAL GRAPHICS PROCESSING.

Amazingly, HALCIEN resides within a single, easily installed 16K ROM — available NOW for the BBC B, B+ and Master series. The HALCIEN package includes a comprehensive User Guide and disc of easily customised utility and demonstration programs.

Bring the power of HALCIEN directly to your micro at the all-inclusive price of £49.95 per pack, or contact us for further technical details. Educational discounts are available — all official enquiries welcomed.

There can be only one conclusion — the HALCIEN days are here!

ADVANCED TECHNICAL FEATURES:-

- A high-level, algorithmic, fully structured program format.
- Modular program construction. Separate program elements can be drawn from several different sources — allowing easy access to utility procedures for rapid program development.
- Programs are stored for execution in an extremely compact, encoded form that packs the maximum program power into the available memory—particularly important on BBC micros.
- Program encoding is both transparent to the user and very fast (even for modular programs drawn from several files) — allowing efficient, source-only program file management.
- A full range of data types (BOOLEAN, 32 bit INTEGER, 48 bit REAL, character STRINGS, ARRAYS, compound STRUCTURES and a REFERENCE type for linked list and tree processing). Fully automatic conversion between data types when required.
- A high degree of 'orthogonality' — parametric values can be presented as literals, variables, procedures or expressions.
- A powerful set of tools for processing a RAM text file both manually (via a screen editing mode) and automatically (using a comprehensive suite of language keywords that can be used within HALCIEN programs of any complexity). These include flexible, bidirectional text cursor movement; string searching; text string insertion, overwrite, exchange or deletion; text block processing; efficient program access to both string AND numeric data values held in textual form.
- A graphics keyword set that allows complex image components ('icons') to be defined with ease, positioned, scaled and rotated through any angle (not just 90 degree steps) — all performed rapidly under full program control. Icon position, size and rotation values can be nested for fully 'structured' image generation. HALCIEN supports both TWO and THREE dimensional wire-frame drawing within a graphics space of 64K units cubed (where the screen is 1K units high). The Earth image above is just one view of an 850+ point 3D icon of the entire planet — supplied on the utility disc as an animated demonstration (in full colour on the Master). HALCIEN is truly a language with GLOBAL application!

Orders and enquiries to:-

High-level Algorithms Limited,
12, Den Brook Close,
Lydwell Park,
Wellswood, Torquay,
Devon TQ1 3TP
TEL: (0803) 22092

HALCIEN language
pack(s) @ £49.95 each
(inc. VAT)
● 40/80T 5¼/3½"
utils disc
● DFS/ADFS disc
format
● model B/B+/
Master series
● Further technical
details of the
HALCIEN language
(delete as appropriate)

Name:

Address:

POST CODE

cise what we already have. The problem with Basic, we are told, is that it is:

- Too slow.
- Too unstructured.
- Too clumsy for X, Y or Z application.
- Too conceptually unsound.

Yet almost every home micro comes with Basic as a standard language. Firms like Atari are still asking software houses to write the 'definitive' Basic. Companies such as Microsoft produce Mouse-Basic for Apple products. Every computer language has its failings, and what we should really do is to ask:

- Is the application we wish to use appropriate for this language?
- Are our coding abilities and talents up to the structures required?
- Do we even think in a relevant structured format?
- Who will use the target program?

Much coded Basic is unstructured *not* because of the failings of Basic, but because of the failure of the programmer to think in a structured way. When even Unix users have a philosophy which states that a working idea is better than none, and that it can at least be improved on, the average home user can hardly be knocked for attempting to solve problems with the tools to hand, ie, BBC Basic.

Building blocks

Still, we should really try to make the best use of Basic, and this often means thinking in a structured way. Compare the program diagrams of figures 1a and 1b. Figure 1a is a form of structure diagram, which is a simple way of showing how the main items of a program hang together. Figure 1b is a flow chart, which shows the flow of execution through a program. Typically a user would draw either of these, before writing any code.

The easiest diagram to follow is figure 1a. This shows that the flow is sequentially through the program, but that each major structure block has sub-blocks. These sub-blocks can be thought of as solutions to sub-problems, which when put together solve the complete problem.

Figure 1b on the other hand attempts to tackle the whole problem in one go, and starts at the beginning, continuing to the end. It is more difficult to solve one large problem in one go, than to solve a number of smaller ones in several stages. The result of this is that we should always search for sub-problems, and solve each sub-problem as a block.

The benefit of thinking in blocks is that

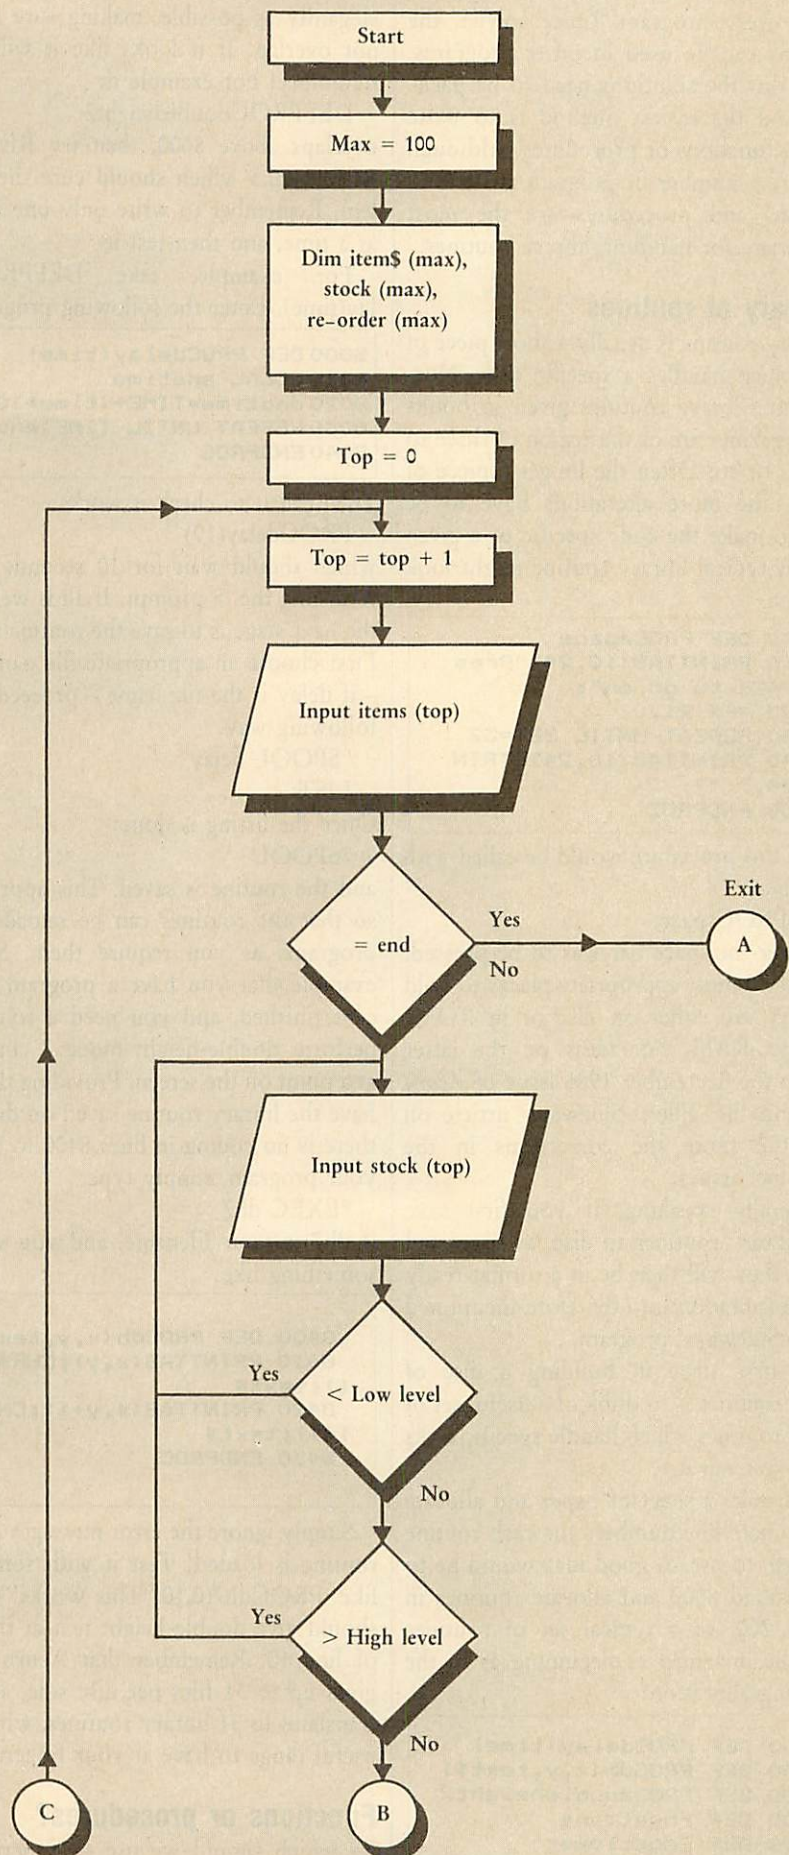


Figure 1b. A flow chart illustrating the flow of execution through a program (incomplete)

JOE'S JOTTINGS

many of the smallest problems recur in almost every program. Once solved, the solutions can be used in other programs. To do this the solutions need to be packaged, and the easiest method is to write them as functions or procedures. Although there are a number of program structures, functions and procedures are the most appropriate for handling library routines.

A library of routines

A library routine is usually a short piece of code which handles a specific task. Normally the library routines given in books and magazines are of the region of three to 10 lines or so. Often the longer a piece of coding, the more alterations have to be made to make the code specific to a given need. A typical library routine might look like this:

```
9000 DEF PROCspace
9010 PRINTTAB(10,24)"Pres
s SPACE to go on";
9020 *FX 21,0
9030 REPEAT UNTIL GET=32
9040 PRINTTAB(10,24)STRIN
G$(20," ");
9050 ENDPROC
```

And this procedure would be called with a line like:

110 PROCspace
whenever the space bar was to be pressed.

The two most appropriate places to hold a library are either on disc or in ROM/sideways RAM. For ideas on the latter refer to the September 1986 issue of *Acorn User* and the 'File-it-Sideways' article on page 102 (note the corrections in the November issue).

Generally speaking, if you first save your library routines to disc, as suggested below, they will then be in a format ready for incorporation into the afore-mentioned 'File-it-Sideways' program.

The first stage in building a disc of library routines is to think of a useful set of related routines which handle specific tasks which you can use.

Next, take a sheet of paper and allocate approximate line numbers for each routine you wish to use. A good idea would be to start around 8000 and allocate routines in sets of 200, so a typical set of routines might be imagined as beginning as in the following allocation:

```
8000 DEF PROCdelay(time)
8200 DEF PROCdh(x,y,text$)
8400 DEF PROCdoubleheight2
8600 DEF FNgetcaps
8800 DEF FNgetlower
9000 DEF PROCspace
9200 DEF FNyesno
```

The next stage is to write each routine as elegantly as possible, making sure it does not overlap. If it looks like it will, then renumber! For example if:

DEFPROCdoubleheight2
overlaps above 8600, then try RENUMBER 8400,5 which should cure the problem. Remember to write only one routine at a time, and then test it.

For example, take DEFPROCdelay(time). Enter the following program:

```
8000 DEF PROCdelay(time)
8010 LOCAL endtime
8020 endtime=TIME+(time*100)
8030 REPEAT UNTIL TIME>endtime
8040 ENDPROC
```

Then call it to check it works:

PROCdelay(10)
which should wait for 10 seconds before returning the > prompt. If all is well, then the next stage is to save the routine to disc. First choose an appropriate file name then – if delay is the file name – proceed in the following way.

*SPOOL delay

LIST

Once the listing is done:

*SPOOL

and the routine is saved. This approach is so that the routines can be reloaded into programs as you require them. Say for example that you have a program 99 per cent finished, and you need a routine to perform double-height mode 7 characters at a point on the screen. Providing that you have the library routine saved on disc, and there is no coding in lines 8400 to 8590 of your program, simply type:

*EXEC dh7

if dh7 is your filename, and you will get something like:

```
8400 DEF PROCdh(x,y,text$)
8410 PRINTTAB(x,y);CHR$(14
1);text$
8420 PRINTTAB(x,y+1);CHR$(
141);text$
8430 ENDPROC
```

Simply ignore the error messages and the routine is loaded! Test it with something like: PROCdh7(0,10,"This Works") which should give double-height text at the start of line 10. Remember that Acorn's DFS gives up to 31 files per disc side, and this translates to 31 library routines, which is a useful range to have at your fingertips.

Functions or procedures?

So which should we use — functions or procedures? Well, the guys who program like there will be no tomorrow reckon that

whenever possible (and even when not possible) we should be using functions. This gives us a lead into such wonderful languages as Prolog and APL and they are capable of very efficient program codes. For my part, getting people to use Logo would be an excellent start, and so I follow a simple but important rule of thumb. Procedures are commands, and they do something. Functions are requests and they return something.

So just think for a second. Is what I want to do in this routine going to give me a new single value (a string, integer or decimal number) which I will later wish to process? If the answer is yes, then you must use a function. If, on the other hand, it's no then use a procedure.

Let's look at FNgetcaps, which returns any key input as a capital letter:

```
8600 DEF FNgetcaps
8610 LOCAL char
8620 REPEAT char=(GET AND
223)
8630 UNTIL char>64 AND cha
r<91
8640 =CHR$char
```

Look, too, at FNgetlower which returns key inputs as lower case letters:

```
8800 DEF FNgetlower
8810 LOCAL char
8820 REPEAT char=(GET OR 3
2)
8830 UNTIL char>96 AND cha
r<123
8840 =CHR$char
```

Notice that the =CHR\$char in both last lines makes the function return the value indicated as a string!

Of course, calling functions is slightly different from calling procedures. The above routines, FNgetcaps and FNgetlower, can be tested by typing:

PRINTFNgetcaps;FNgetlower
and then pressing any letter key twice. If processing of the key-press must be done, then the function must be slotted into a variable, for example:

key\$=FNgetcaps;

Sometimes it becomes important for a function or procedure to call on another routine. The action which should be taken is demonstrated in the library routine FNyesno illustrated below:

```
9200 DEF FNyesno
9210 LOCAL char$
9220 REPEAT char$=FNgetca
ps
9230 UNTIL char$="Y" OR c
har$="N"
9240 =char$
```


which might be tested by this short piece of coding:

```
10 PRINT "Do you want t
o go on?"
20 PRINT "Press Yes or
No (Y/N)";
30 char$=FNyesno
40 IF char$="Y" THEN RU
N
50 END
```

Remember that this requires the use of both DEFFNyesno and DEFFNgetcaps. Readers looking for the DEFdoubleheight2 routine, which works for text in modes 2 and 4, can find this in September's Joe's Jottings, embedded in a number of useful routines for menus (see September's listing 5, lines 330 to 450).

The major library routines discussed in this article are actually found in the yellow pages. The previous library routines were short enough to incorporate into the text to demonstrate the important points about building and using a library.

The library routines in yellow pages do not follow the line-numbering approach suggested previously, but this is no problem, as once entered they can be renumbered to suit your own choice of lines, then tested and spooled as demonstrated previously. In some cases a number of routines are given together, as they can be tested in one go. In such cases follow the instructions set out in figure 2.

The print using procedure

'Print using' is a command found in a number of Basics, and its aim is to simplify the printing of numerical values, for example in the listing of amounts of pounds and pence. Listing 1 contains both the library routine and some demonstration calling lines. To store the library routine, you will need to delete up to line 160 and renumber the remainder of the program, then *SPOOL it to disc. Notice how the procedure is called:

PROCusing(template\$,number)
where the number is just the number to be printed, but the template\$ holds the format in which the number must be printed. The legal characters in the template and their effects are shown in figure 3. The main use of this routine is in printing lists of numbers with the decimal points in a column, and with the precise number of decimal places available.

Notice first that PROCusing has a sub-procedure, PROCsigns, which is used to handle the leading and trailing signs. This procedure is always needed when you call PROCusing, and so should in fact be saved

1. Test the program.
2. DELETE the unwanted calling lines.
3. RENUMBER to your choice of line numbers, then:

*SPOOL <filename>

LIST n,m

where n and m are the start and end lines of the routine you wish to save. Finally:

*SPOOL

4. Now delete the lines you have just saved and repeat from 3 above.

Figure 2. If a number of routines are together, and to be tested together, follow these instructions

Character	Meaning
£	Print a pound sign
\$	Print a dollar sign
<SPACE>	Print a space
*	Print a *
E	Print this number in exponential notation
-	Print this number with a trailing — sign (if it is negative)
+ (1st character)	Print this number prefixed by a + or -
+ (any other char)	Print this number with a trailing + or -
.	Print this number with a Decimal point
#	This is a digit in the number

Typical configurations of the template and its results are:

PROCusing("#.##E+",12.567) gives 1.26E1 +

PROCusing("+###.###",12.567) gives +12.567

PROCusing("£##.##",12.567) gives £12.56

PROCusing("* ###.### *",12.567) gives * 12.5670 *

PROCusing("* ## *",12.567) gives * 12 *

Figure 3. Legal characters in the template and their effects

with PROCusing itself.

Line 190 contains the string of valid characters, this can be added to as the user wishes. All characters in this string will be printed if they are sent as part of the template. Notice too the almost extravagant use of local variables:

min	indicates whether the number is + or -
spos	indicates the position of the sign
mpos	indicates a trailing minus sign
Eflag	indicates exponential notation to be used
dps	number of decimal places
figs	number of significant figures
1p%,dp,fig.	support variables

Most of the hard work involving positioning the decimal point is done in lines 320 (which checks for exponential (E) notation) and 330 (which recalculates the zone variable @% to match the ##.### template). Line 340 checks for integer numbers and the actual printing is done by lines 350 to 380, which work through the template printing characters which match

each other, then the number, and finally any further matching characters.

Two quirks of the coding, which advanced users might wish to alter are first the display of E numbers. The display always operates with one number before the decimal point, so ###.###E is interpreted as #.###E. Second, the display without decimal places, which is rounded down so for example 12.1 becomes 12 as does 12.9. A cure for this is to alter the last statement of line 340 to read as follows,
:no=INT(no+.5)

The intelligent input routine

One of the greatest problems facing the program writer is the fear that a user will enter garbage when an INPUT command occurs. This is difficult to avoid and at the very least can lead to screen displays being wrecked. Imagine for example that you want the user to input a DFS filename. Wouldn't it be useful to force only seven letters of entry at the time of INPUT? Consider too a user who has to type a number: wouldn't it be valuable only to activate the number keys on the keyboard during entry?

Records left to load:	14
Records left to load:	13
Records left to load:	12
Records left to load:	11
Records left to load:	10
Records left to load:	9
Records left to load:	8
Records left to load:	7
Records left to load:	6
Records left to load:	5
Records left to load:	4
Records left to load:	3
Records left to load:	2
Records left to load:	1
Records left to load:	0
All loaded.	
red leds	90 30
green leds	23 20
amber leds	35 30
flashing leds	60 50
opto LDR ORP12	120 40
opto BP 500	70 20
opto OCP 71	20 19
Octal Dtns	30 15
BC 108	120 50
555 Timers	100 35
74LS00	80 20
74LS254	40 12
20×IDC CON SKT	30 12
26×IDC CON SKT	27 12
END	0 0

Figure 4. Lists left in memory for further use

The answers to these questions are self-evident, and to show the benefits of intelligent input we offer listing 2 on the yellow pages, which includes the demonstration calling program and the library routines for FNinputusing and PROCvalid. Both these routines should be used together.

A valid procedure

PROCvalid is a procedure which creates a number of global variables which can be used separately or combined to give sets of characters for FNinputusing. If you wish to design a set of regularly used characters then just add it to the procedure. For example say we want to intelligently input the words yes or no, then it would be useful to add:

```
395 yesno$="YESNO"
and a word using those letters could be entered using:
```

```
choice$=FNinputusing(yesno$,"...")
Notice that the template in the calling function can be any repeatable character, eg, '...' or '###' or ' ', etc. You could even indicate defaults:
```

```
choice$=FNinputusing("YESNO",
```

```
"NO ")
and then if choice$ was a null string (" ")
this could be interpreted as no:
```

```
IF choice$="NO" OR choice$=""
PROCdono ELSE PROCdoyes
```

The calling program with FNinputusing simply allows the user to enter an 11-letter name using only capital letters. This is useful because 98 per cent of English forenames are 11 or fewer letters long (11 covers Christopher). Remember that somewhere in the calling program PROCvalid should occur, unless you send all strings to the function explicitly, eg:

```
("0123456789", "#####").
```

Line 180 prints the template which defines the input area on screen, and then resets the cursor to the start of this area. Lines 210 to 290 actually handle the input using a repeat loop to build up multiple GETs. Notice in line 210 that the function exits when the Return key (CHR\$13) is pressed, and that line 250 handles the Delete key, replacing deleted characters from the template. Line 260 checks the validity of any key pressed, and whether the input field width is being exceeded. The check for b%=127 in the same line is simply to prevent an already empty string from being further deleted! Line 270 displays the current legal key-press and adds it to the string which is growing, then loops round again for the next keypress.

The flexibility of FNinputusing is such that readers may wish to design other input routines which make use of it. Listing 3 is one such, where the user is prompted for a title, as in Dear Mr - where Mr is the title. The aim of the function here is to return one of a set of legal titles. The letters of the legal titles are specified in line 170, as DMFIRS from which a number of titles can be created. Because we cannot guarantee that a user will type a 'silly' title like 'SID', we have to compare the input typed with a title list, and this is done in line 190, after first padding the input to four letters made up with spaces. The INSTR of line 190 is arranged in sets of four letters, so that any failure of the input to match a set of four letters is equivalent to the input being garbage, and this results in a demand for re-entry. Note especially that lines 150 and 160 are the means by which we ask for input, and position that input on screen. These will need changing to suit each fresh application.

Readers might like to extend the routine to cope with the titles Hon and Rt.Hon, to explore lines 170 to 190 further. Remember that FNinputusing is needed to test this

program! Listing 4 on the yellow pages also makes use of FNinputusing, and is a function to return the date, checked to be a valid calendar date. Notice that lines 170, 190, 220 and 280 specify the points on screen where entry takes place. Note too that although there are three inputs of day, month and year, line 170 shows the three inputs in context and the other lines 190, 220, and 280 overwrite the appropriate letters to make the input seem continuous.

Days are entered between lines 170 and 210 and line 210 forces input to be in the range 01 to 31 with two digits typed, so the ninth has to be entered as 09.

Months are entered similarly between lines 220 and 240, and months like February have to be entered as 02. Line 250 checks for 31 days in September, April, June and November, and if found restarts the routine from the days entry. Line 250 checks for 30+ days in February and again restarts if this is found.

The years from 00 to 99 are entered via lines 280 to 300, and line 310 checks the validity of the date in terms of leap years. The three inputs are then combined (concatenated) in order year, month, day and returned to the calling line. The reason for reversing the logical order is to aid future processing, particularly sorting into age-order. Remember that both FNinputusing and PROCvalid are needed here.

Routines for data entry and filing

Listings 5 and 6 can be entered together and tested. Be careful of the odd line numbers in listing 6 which fits into listing 5. The library routines available include DEFFNitemname, DEFFNstockamount, DEFFNdangerlevel and DEFFNcheck in listing 5 and DEFFNsparefile and DEFFNsavelists in listing 6.

Note too that PROCvalid and FNinputusing are needed to test these routines. Most of the routines are self-documenting, so I shall concentrate on the last three.

FNcheck is a small function which is called with a line like:

```
PRINT FNcheck(x,lo,hi)
```

where x is usually an unknown variable, and lo and hi are the range of acceptability for x. If x is in the range, the value -1 is returned otherwise a 0 is returned (true=-1 false=0). The routine is normally called at the end of a REPEAT UNTIL loop, to allow exit from the loop if the number is in range:

```
UNTIL FNcheck(stock,0,128)
```

FNsparefile is an equally short routine in listing 6 which is called with a line like:

PRINT FNsparefile(<filename>)

The function then searches for a file with the name indicated and returns a 0 (false) if one exists and a -1 (true) if one does not exist. Hence a true return indicates a spare file, ie, one which can be saved with the name given.

DEFPROCsave lists sequentially saves the items in the three related lists between item(0) and item(top). Notice that the number of items is save in line 450 as the first item in the file. Note also that line 190 must be deleted from listing 5 when combining with listing 6.

Routines to load lists

Listing 7 has three useful routines which can be used to retrieve the datafile from disc - FNfileexists, FNloadlists, and PROCprintlists. Again FNinputusing is needed to test the routines, or replace line 190 with INPUTf\$ (naughty!!). The first routine checks whether the named file exists and if so returns a true value. The second function loads the lists back from the sequential file, and the last procedure prints out the contents of the lists as far as the last item on file. The lists are left in

memory for further processing. This is demonstrated in figure 4.

Users will need to make one, two or three changes to the list manipulation routines of listings 5, 6, and 7. The first is to increase or decrease the initial size of the list. This is done with a DIM statement, and this normally appears outside the routines at the start of the program eg, in line 150 of listing 7.

The next alteration is to have different list types, for example an address\$() list instead of the reorder%() list. To cater for this remember to change all occurrences of reorder%(to address\$(in every program, and then alter the input routines to allow letter entry, and avoid calling FNcheck for that list.

The final alteration is to reduce the number of lists. Reducing the number of lists is demonstrated by the routines of listings 8 and 9 which work with single lists, and are self-documenting.

Just to encourage you to start looking for your own routines, we offer listings 10, 11 and 12, which each have one routine, FNaverage, FNmax and FNmin. FNaverage finds the average of a list of numbers.

FNmax finds the largest element and FNmin finds the smallest element. Again, they are self-documenting, so should be easy to follow. Remember that our list is called 'list' whereas yours may not be, so change the name to suit. Our highest element is called 'top' and this is sent to the functions as a parameter. If you don't have 'top', then send your equivalent end of data pointer.

Well there you go, about 27 library routines which you can convert to match your needs, to entertain you during the long winter hours.

Useful references

The following books will provide you with background reference material on functions and procedures:

Procedures and Functions in BBC Basic by D Gregory (Addison Wesley) - reviewed July 1985.

Handbook of Procedures and Functions for the BBC Micro by A and O Bishop (Granada) - reviewed November 1984.

Turn to the yellow pages' index on page 113 to find out where Joe's library routine listings are and how to enter them.

ASK YOUR LOCAL DEALER ABOUT THE HANTAREX ECONOMIC RANGE THAT COMBINES HIGH SPECIFICATION WITH LOW PRICE





HX-12

12" Comp. Video P 31.
£79.50

BIM ▶

12" PC Compatible
18.43kHz TTL P39
£99.00

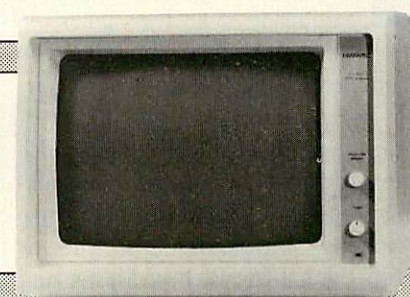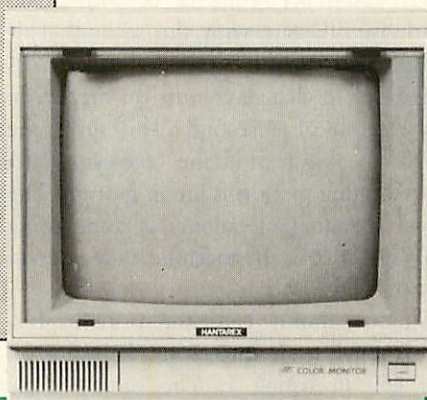


CT 9000

14" Colour PAL/RGB I.
MR (.51mm) £199.50
14" Colour RGB I/Grn/Amb
HR (.39mm) £339.50



HANTAREX®
QUALITY . RELIABILITY . SERVICE

Hantarex UK Limited,
Unit 2, 243 Kangley Bridge Road, Sydenham,
London SE26 5BA. Tel: 01-778 1414. Tx. 8952421 Hantar G.

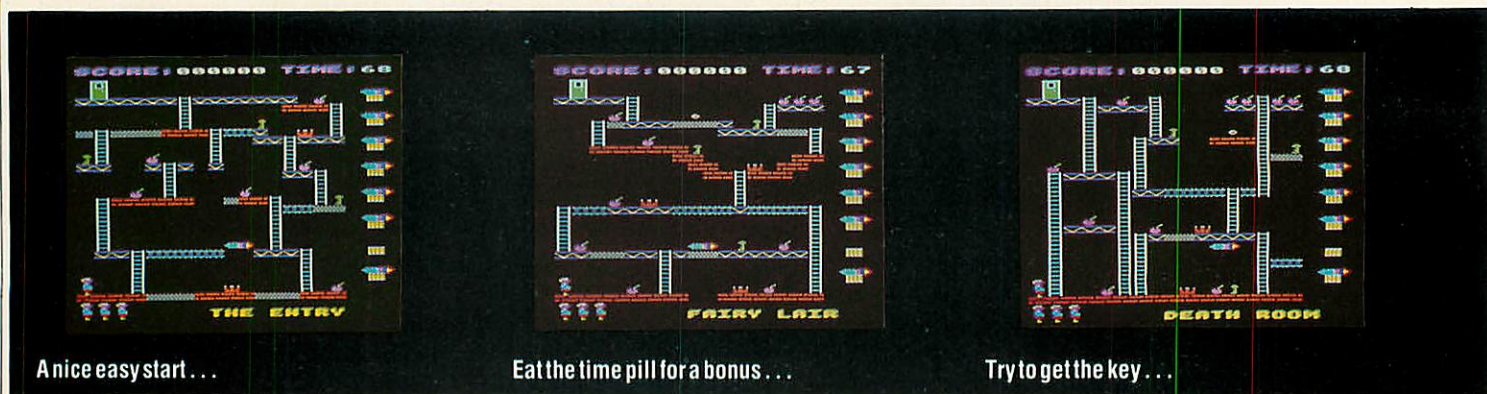

ENTER THE NIGHTMARE WORLD

Test your fingers and your brain
designing and playing screens on this platform game

Mark de Weger

Have you ever wanted to write an arcade game, but been put off by the amount and difficulty of coding? Or thought a commercial arcade game was much too difficult or too easy? Did you think you could do better? Then *Castle of Nightmares* is the game for you!

Within the limits of the program, which are almost the limits of your own imagination, you can create a platform-type game with *Castle of Nightmares*. The game is compatible with BBC B, B+, Master and Electron micros. It works with both cassette and disc, though Electron users with a Plus 3 will have to use the tape version, as the program needs all the available memory from &1200 upwards.

The program consists of three parts, the loader program, the screen designer and the game itself. The game features you in the role of the hero, Balbo. A mean dragon, named Smoke, has lured you into the *Castle of Nightmares*. In your hunt for keys to open the doors, you must negotiate the traps the dwarves have set, disappearing platforms, conveyor belts and exploding spikes to name but a few! Before you can enter this fantasy world of fear, des-

truction and heroism, you will have to enter the listings on the yellow pages (index, page 113). The first listing is the loader program for both the screen designer and the game. It assembles the machine code and sets up music and sprite data.

For the machine code enthusiasts, an explanation of how the assembler routines work follows. If, however, you think that ADC stands for 'Acorn users Do it with Computers', you can simply skip it.

The assembly consists of two main routines. I'll start with the second! This routine uses event five (interval timer crossing zero) to change colours on the screen every tenth of a second. This gives the player the impression the conveyor belts and vibrating platforms are in motion. The actual changing of colours is done using OSWORD &C, the machine code equivalent of VDU 19.

The first routine is for the sprite display, and is much more interesting. It begins on line 450 in listing 1. The value in the accumulator (passed from Basic through the variable A%) tells the routine what should happen to the sprite, after first deleting it. The movement is handled by routines such as 'right1' and 'left2'. The

main sprite display routine, 'sprite2', is then called to put the sprite onto the screen. Table 1 shows the addresses which are used by this routine.

In the September, October and November 1984 issues of *Acorn User*, Harry Sinclair explained the two main problems when creating mode 2 sprites, how one byte of the screen memory defines the colours of two pixels, this is done by means of 'interweaving' and how the screen memory is built up (see table 1).

If you understand the answers to these two problems, you won't have much difficulty in understanding the routine 'Sprite2'. Even if you don't quite understand it, you can set up the addresses as illustrated table 1 and use the routine for your own purposes.

'Sprite2' starts by copying the screen address of the sprite to be displayed into &86,87 and loading the X-register with the height of the sprite (lines 2050-2100). A byte of the sprite data is then loaded into the accumulator and EORed with the background colour, then pokes it to the screen (lines 2120-2140).

The sprite data address and the screen address are incremented by one. If the



Home sweet home ...



Watch out for the spikes ...



Don't forget the time pill ...

screen address is at the bottom of a mode 2 column, then it has to be incremented by $\&279$ (lines 2150-2310). If you look at figure 1, you will see why. The X-register, which holds the height of the sprite, is decremented and if this has not yet reached zero, the next byte of sprite data is poked to the screen (lines 2330-2340). Otherwise the screen address is incremented by eight (again, see figure 1) and this process repeated until all columns have been displayed (lines 2350-2440).

If you have followed the above, you will realise (provided you are not an absolute beginner) it would be quite easy to change the sprites used by *Castle of Nightmares*. The man-sprite, for example, is eight pixels wide and 16 high. As one byte of mode 2 screen memory defines two pixels, there are $(8/2) \times 16 = 64$ bytes to define. As the sprite routine works column by column, you should group the sprite data by column. It is quite a laborious task to define 64 bytes and it is best to write a simple sprite definer program.

Listing 2 on the yellow pages is the screen designer program, with which you can design screens that are saved to tape or disc, for later use in the game program.

To use the screen editor, chain the loader program (don't forget to set Page to $\&1700$) and select option one. You will be asked if you wish to load a screen from tape or disc. The first time, of course, you won't have created any screens, so answer 'N'. To load a screen, press 'Y'. Disc users will be presented with a catalogue. All screens are saved in directory S and are 'numbered' from A to Z. Press the appropriate letter to load a screen.

Now the program will build up the screen and a cursor will appear. It can be moved using Z, X, : and / keys for left, right, up and down. By pressing one of the number keys, you can place a building block at the cursor. The various blocks are shown at the top of the screen. The spacebar will erase a cell and Return will

New column: address + 8	
At bot- tom of co- lumn: ad- dress + $\&279$	$\&3000$ $\&3008$
	$\&3001$ $\&3009$
	$\&3002$ $\&300A$
	$\&3003$.
	$\&3004$.
	$\&3005$.
	$\&3006$.
	$\&3007$.
	$\&3280$.
	$\&3281$.
	.
	.
	.
	.
	.
$\&80,81$	screen address of sprite to be displayed
$\&82,83$	data address of this sprite
$\&84$	height of sprite
$\&85$	width of sprite

Figure 1. Top shows mode 2 screen layout and bottom, the bytes used by sprite routines.

repeat the last block placed on the screen.

It is not possible to edit the top and bottom left corners of the screen, as these are the places where the door and the man are when the game starts.

When you are satisfied with the result press Escape. You will be asked if you wish to save the screen to tape or disc. If so, you will be asked to enter a title of up to 10 characters. This is not the filename, but the title displayed at the bottom of the screen, when you play the game.

After that, a catalogue of the tape/disc will be displayed. Tape users should press Escape when the tape has reached the point at which they wish to save the screen. Then enter a single-character filename. Here you should take care, as the game program first

loads screen A, then screen B, etc, until it has reached the last one (this need not be screen Z), at which point the sequence will be repeated.

I would advise tape users to use a different tape for the screen data files and make a note of the tape counter value at the beginning of each screen. This makes it much easier to find and adapt the screens.

The next thing the program needs to know is whether you wish to create or edit another screen. If not, the loader program is chained on the disc version. If you use the tape version, the program simply ends, so that you can stop or chain the game.

The photographs on these pages will give you some idea of the type of things which can be done. The best screens are designed by giving your thoughts free play, changing them if problems occur when playing.

The game is selected as option two of the loader program. Tape users will be asked to enter the number of screens they wish to play before the game starts again. The screens need to have been saved consecutively on the data tape as 'S.A', 'S.B', etc. The disc version will scan the disc to see if there is a next screen to be played, so no need to enter the number of screens.

After loading, tape users will be asked to rewind the data tape, so that the first screen can be loaded. Then the first screen is built up and the fun begins. The object of the game is to collect three keys and use these to open the door in the top left corner of the screen. There is a time limit — on the first level you have 70 seconds. To make this difficult, you encounter many hazards, missiles that have to be avoided, belts transporting you into directions you don't want to go in and platforms that disappear when you walk over them. So there are plenty of ways to be killed! Fortunately, there are more pleasant features: the vibrating platforms give points when they disappear, as do cherries when they are picked up. A time pill restores the time left to complete a screen.



Get your timing right on the jump...



Nasty jumps and threatening missiles...



One of the hardest screens...

Of course you can make screens as easy or as fiendishly difficult as you want by using the screen editor.

Use Z, X, : and/to move left, right, up and down, press Return to jump, Copy to pause the game and Delete to start again. Escape will abort the current game and CTRL-Escape will return you to the loader program on the disc version. If the game is frozen, you can press Q to switch all sounds off and S to switch it on again.


When a screen is completed, the time left is multiplied by 10 and added to your score and the next screen will be loaded. After all screens have been successfully completed, the program will restart with the first screen - with 10 seconds less to complete it. At this point tape users will be asked to rewind the data tape.

For those interested in how the program works, I will give a description.

After the variables are set up and a screen loaded, the program enters the main loop, lines 50 to 120. This checks for the keys pressed and then moves the player. It also calls PROCm, which moves the missiles and plays music. Finally, PROCc is executed. This procedure obtains the character at the position of the man and then carries out the appropriate action, making him fall or pick up a key. The loop continues until the player has either completed a screen or been killed, after which lines 130 to 210 work out high scores, and restart the game.

The procedures l, r, u, d and j (jump) move the player if possible and also call PROCm to move missiles and play music. PROCm starts at line 440. It first calls PROCn, which prints the score and the time left, then it plays a note from the tune if there is any room in the sound buffers. Next, it moves a missile and calls PROCK, which kills the player if the missile has hit him, or makes a new missile flicker once when the old one has reached the left of the screen.

The final important procedure is

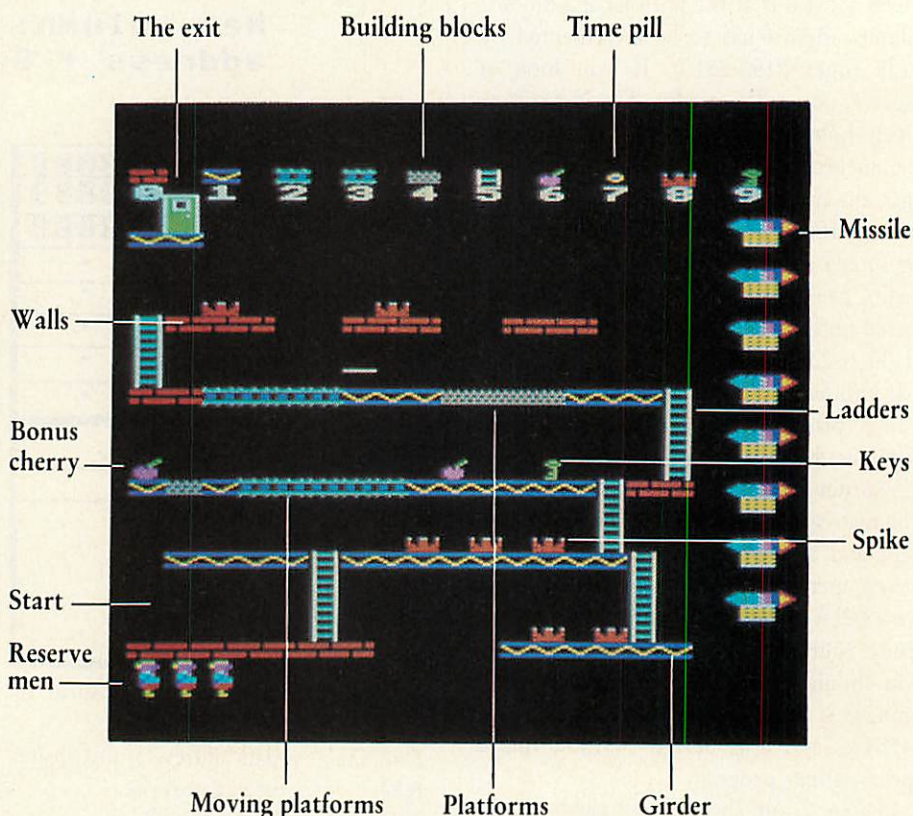

The Castle of Nightmares designer screen illustrates the components of the game, make them as simple or tough as you want using the screen editor.

PROCc, which starts at line 820. It first checks if the time has run out and, if so, calls PROCK, which kills the player. Otherwise it uses FNw to find out what the blocks around the man are. If necessary, it then calls certain procedures which restore the time left when a time pill was picked up, or make a vibrating platform disappear if the player walked over it.

As memory is used to full capacity, there is hardly any possibility for program extension. Tape users, however, could try to make the program load in more than one screen at a time - memory from &D00 to &1200 is free on tape-based BBC micros.

I hope you will have lots of fun in designing and playing screens. May *Castle of Nightmares* be a happy dream!

The nightmare continues

The nightmare continues next month when our Dutch author continues *The Castle of Nightmares* saga by explaining how to play the game to the full and will give away hints and tips for success enroute. For example, how to collect the key at the other end of a disappearing platform.

In addition Mark will discuss how to go about designing new screens for you to add and play, providing five more of his own in the process. Do you have any screens of your own? If so we'd like to see them and will publish a selection of the best in forthcoming issues of *Acorn User*. Send them to the office and mark your envelope NIGHTMARE!

Turn to page 113 for details of where to find *Castle of Nightmares* listings.

PROGRAM NOTES

Procedures and variables used in NIGHTM1		PROCsetup	sets up variables, envelopes, etc	H%	number of lives left
Integers		PROC-	pokes sprites data into memory	I%	hi-score
P%	used by assembler	sprites		J%	flag that is set when you have completed a screen
mc%	start address of machine code	PROCTune	pokes tune data into memory	K%	number of keys collected
sprites%	start address of sprites data	Procedures and variables used in NIGHTM2		L%	loop counter
tune%	start address of tune data	Integers		M%	X-co-ordinate of missile
Reals		X%, Y%	used by PROCoscli to point to string	N%	Y-co-ordinate of missile
block1-3	start addresses of data for interval-timer-crossing-zero event setup routine	a%, b%, c%, d%	co-ordinates used by PROCbox	O%	start of tune data
p-block	workspace for this routine	c1%, c2%	colours used by PROC3d	P%	entry address of most sprite routines
pass	used by assembler OPT statement	ch%	state of OPENUP	Q%	entry address for missile-sprite routines
Real arrays		loop%	loop counter	R%	time left to complete a screen
s()	start addresses of data for different sprites	nr%	various	S%	screen number
Main assembler labels		nx%, ny%	new X- and Y-co-ordinates of cursor	T%	pointer to tune data (offset from O%)
entry	entry for sprite routines. Jumps to appropriate routine to move man/missile, depending on the value of A%	ox%, oy%	old X- and Y-co-ordinates of cursor	U%-Y%	various
right . ./left	move various man-sprites (left-facing, right-facing etc) left, right etc.	prev%	value of last character put on screen	Z%	address of sprite routine to display a man-sprite
down . ./up . ./		x%, y%	various	t%	flag that is set when the tune is off
missile	moves missile	Strings		x%, y%	various
sprite1	sets up addresses for sprite2 and then enters this	fn\$	filename	Strings	
sprite 2	displays a sprite	key\$	key pressed	I\$	name of person with hi-score
delete	deletes man from screen	text\$	text to be printed by various procedures	t\$	string to be printed by PROCv
scr-addr	moves address of man-sprite (in &70,71) into &80,81, necessary for routine sprite2	yn\$	to be (yes) or not to be	Reals	
right/left/up/down	calculate new screen address for man-sprite event-driven routine to change colours (equivalent of VDU 19)	Functions		x, y	various
cols		FNfilename	asks for filename	Functions	
setup	loads interval timer with 1/10th of a second	FNyn	asks for yes or no	FNw	gives value of a position in screen data
clock	contains data for interval timer	Procedures		Procedures	
Zero page workspace of sprite routines		PROC3d	prints a string in '3D'	PROCa	pokes a value into the screen data area
&70,71	screen address of man-sprite	PROCbox	draws a box	PROCb	draws a box
&72,73	data address of the man-sprite previously displayed	PROC-	main routine in which screen is created	PROCc	works out the character at the position of the man and carries out the appropriate action
&76,77	screen address of missile	PROCcreate	issues MOS command	PROCd	moves man down
&7A	current direction of man (1=right, 2=left, 3=up)	PROCoscli	pokes a value into the screen data area (&900-&AFF)	PROCe	loads a new screen
Procedures		PROCpoke	creates screen from data in the screen data area	PROCF	updates variables and screen if a key is picked up
PROCas-	assembles machine code	PROCset	puts a character on screen	PROCg	pause routine
semble		PROCsetup	displays options	PROCj	makes man jump
PROCchars	defines user-defined characters	PROCstart	loads screen if necessary	PROCK	carries out the appropriate action when player is 'dead'
PROCchec-	calls PROCcs for various	Procedures and variables used in NIGHTM3		PROC1	moves man left
ksums	checksums	Integers:		PROCm	moves missile and plays tune
PROCcs	actual checksum calculating routine	A%	determines what happens to a sprite (deletion, move left, right, etc) when P% is called	PROCn	prints score and time left
PROCinstr	prints title and gives menu	B%	flag that is set when the player is 'dead'	PROCo	carries out MOS command
		C%	X-co-ordinate of man	PROCp	pauses a while to smooth the action
		D%	Y-co-ordinate of man	PROCr	moves man right
		E%	gives character at position of man	PROCcs	puts a character on screen
		F%	score	PROCT	makes man fall
		G%	maximum time to complete a screen	PROCu	moves man up
				PROCv	prints a string in 3D
				PROCz	creates screen from the data in the screen-data area

BAR CODE READERS

ACORN USER OFFER

New economy pack bar code reader only £29.95 each!



The bar code reader and user manual

At last there's an alternative for those of you who have always wanted to use the bar code reader, but have found it too expensive. PMF Design, the manufacturers of the reader for the teaching pack, have produced a new reliable economy version in conjunction with the Council for Educational Technology (CET).

The reader is designed for use with the simple software supplied, which will allow you to read and print bar codes. The pack includes the following:

- A new slim, easy to handle reader.
- 40/80 track disc or cassette.
- A manual included in the software.

The economy pack sells for the truly economical price of £29.95 (please add £1.50 for post and packing in the UK and £2.90 for overseas orders).

For use with the bar code reader economy pack, we are introducing a new version of the bar code listings, also in an economy version, to be published every month.

The listings will be supplied on a simple stapled A4 set of sheets. Thus keeping costs at a minimum, so we can supply you at the lowest price possible. Back issues of the bar code booklets from December 1984 to January 1986 are available.

To order your December issue bar code leaflet, or back issue booklets, please send £2.50 per item ordered (£3.25, Europe and £4.50, rest of world). Cheques should be made payable to Redwood Publishing. Please address your orders to Seran (BCL) at the address below.

Remember, the bar code teaching pack is

still available and some of you may consider it more suitable, especially those of you in education, as the software is more comprehensive.

Below is some of the software:

- printing and reading bar codes
- using the reader as a binary decoder encoding ASCII characters into bar codes
- reading supermarket bar codes
- music programs

In addition to the bar code reader and software – on disc or cassette, there is a comprehensive manual written by George Hill and a metal stencil for drawing your own bar codes.

The total price of the teaching pack is £83.84 (including VAT and £2.95 for post and packing).

Please send me _____ copies of the bar code reader economy pack at £29.95 each plus £1.50 p+p in the UK and £2.90 rest of world (per reader)

☐ 40-track disc ☐ or cassette

I enclose my cheque/postal order made payable to PMF Designs Ltd (official orders welcome).

NAME _____

ADDRESS _____

POSTCODE _____

SIGNED _____

DATE _____

Send this form with your remittance to: Bar Code Offer, Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF

Please send me _____ copies of the bar code reader teaching pack at £83.84 (inclusive).

☐ 40 track disc ☐ or cassette

I enclose my cheque/postal order made payable to Redwood Publishing Ltd, (official orders welcome).

NAME _____

ADDRESS _____

POSTCODE _____

SIGNED _____

DATE _____

Send this form with your remittance to: Bar Code Offer, Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF

ACORN SOFTWARE ACORN SOFTWARE BBC & ELECTRON

MICROPOWER

AMAZING OFFERS

ALSO NEW 3 1/2" COMPACT

VIEW WORDPROCESSING
CARTRIDGE

~~£29.95~~ **£12.95**

VIEW SPREAD SHEET
CARTRIDGE

~~£29.95~~ **£12.95**

For Electron only.
Telephone for special
price for BBC version.

● OR ONLY **£19.95** FOR BOTH *FOR A LIMITED PERIOD ONLY

BBC COMPACT NEW

TYNESOFT

Mousetrap	£9.95
Winter Olympics	£9.95
Jet Set Willy	£9.95
Ian Botham Test Match	£9.95
U.S. Drag Racing	£9.95
Vindaloo	£9.95
Commonwealth Games	£9.95
Bug Eyes III	£9.95

SUPERIOR

Speech!	£14.95
Karate Combat	£14.95
Citadel	£14.95
Repton 2	£14.95
Galaforce	£14.95
Stryker's Run	£14.95

MICROPOWER

**NEW *DR WHO AND
THE MINES OF TERROR
ONLY £9.95**

PRIMARY EDUCATION

Sentence Sequence	£6.99
Word Sequence	£6.99
Missing Signs	£6.99
Number Balance	£6.99
Talk Back	£6.99

ELECTRON

HOME INTEREST

Workshop	£6.99
Tree of Knowledge	£6.99
Peeko Computer	£6.99
The Complete Cocktail Maker	£6.99
Paul Daniels Magic Show	£6.99

BUSINESS

Desk Diary	£6.99
Personal Money Management	£6.99
Business Games	£6.99
Graphs & Charts	£6.99
Creative Graphics	£6.99

● SELECT ANY FIVE FOR ONLY **£7.95** ELECTRON

EDUCATION

Linkword German	£14.95
Linkword Spanish	£14.95
Linkword Italian	£14.95
I DO	£12.65

BBC & ELECTRON

Maths 'O' Level I	£12.65
Maths 'O' Level II	£12.65
Biology	£12.65
English	£12.65

● ANY TWO FOR **£5.95**

Magic Mushrooms	£11.95
Lisp Cassette	£9.95
Turtle Graphics Cassette	£9.95
Theatre Quiz	£12.95

ELECTRON ONLY

MICROPOWER GAMES

Bandits at 3 O'clock	£6.95
Escape from Moon Base Alpha	£7.95
Ghouls	£7.95
Stock Car	£7.95
Killer Gorilla	£7.95

BBC & ELECTRON

Rubble Trouble	£7.95
Swoop	£7.95
Croaker	£7.95
Bumble Bee	£7.95
Positron	£7.95

● ANY FIVE FOR ONLY **£7.95** ELECTRON ONLY

Adventure	£7.95
The Mine	£7.95
Felix in the Factory	£7.95
Gauntlet	£7.95
Jet Power Jack	£7.95

NEW!! MICROPOWER MAGIC COMPILATION

10 ORIGINAL HITS — FANTASTIC VALUE

BBC B/B + /MASTER CASSETTE	£7.95
BBC B/B + /MASTER 80T DISC	£7.95
BBC B/B + /MASTER 40T DISC	£7.95
BBC COMPACT DISC	£9.95

ELECTRON CASSETTE **£7.95**

● INCLUDES: STOCK CAR, BANDITS AT 3 O'CLOCK & CYBERTRON MISSION

TEN CLASSIC HITS

INCLUDING
● STOCK CAR
● KILLER GORILLA
● DUNE RIDER

DR WHO OFFERS

BBC ROM & CASSETTE	£18.95	£8.95
BBC + DISC & ROM	£19.95	£9.95
BBC MASTER/B + DISC	NEW	£9.95
BBC COMPACT DISC	NEW	£9.95

CASTLE QUEST MODEL B

BBC B DISC	£14.95	£7.95
BBC B CASSETTE	£12.95	£6.95

ROM CARTRIDGES

Logo Cartridge	£59.95	£29.95
ISO Pascal Cartridge	£59.95	£29.95
LISP Cartridge	£29.95	£9.95
Starship Command	£14.95	£2.95
Countdown to Doom	£14.95	£2.95

ELITE

plus 3 Games Disk	£12.95	£10.95
Me and My Micro	£19.95	£9.95
Book and Cassette	£12.95	£2.95
Electron Advanced User Guide	£9.95	£2.95

Micro Power Limited, Northwood House, North Street, Leeds LS7 2AA

MICROPOWER



CHEQUES PAYABLE TO MICRO
POWER. GOODS DESPATCHED
WITHIN 48 HRS. PRICES INCLUDE
V.A.T. ACCESS/VISA. SEND YOUR
ORDER TO: MICRO POWER LTD.,
NORTHWOOD HOUSE, NORTH
STREET, LEEDS LS7 2AA.
DEALERS ENQUIRIES WELCOME
TEL: 0532 458800/434006

Name _____

Address _____

PLEASE ADD 0.95p P&P

MICRO POWER LEEDS

Yorkshire's leading ACORN/BBC Specialist

Approved Repairs &
Econet Centre

ACORN/BBC MASTER COMPACT

AVAILABLE
NOW

Master Compact 128K + 640K
3.5 inch Disc Drive only **£399 + VAT**

Master Compact 128K + 640K
3.5 inch Disc Drive + High Res. Mono Monitor **£469 + VAT**

Micropower Wordprocessing Special
Master Compact 128K + 640K 3.5 inch disc drive,
Green Screen Monitor + Silver Reed EXP500 Printer **£599 + VAT**

MASTER COMPACT SOFTWARE!!

We will be stocking virtually every
software product available at
Compact Launch.
Send now for full list.
Doctor Who and the Mines of Terror —
£9.95
MicroPower Magic —
10 game compilation **£9.95 ONLY**

BBC Master 128K **£435.22 + Vat**
Turbo Upgrade **£109.35 + Vat**
512K Module **£348.26 + Vat**

Disc Drives

Acorn ADD 03 800K **£274.78 + Vat**
Pace Drives from **£95.00**
Cumana Drives from **£99.96**
(See our Special prices on 5.25 inch
disks)

Printers

Citizen 120D (120 cps inc.
tractor) **£199.00 + Vat**
Citizen LSP10 **£216.52 + Vat**

Monitors

We carry the latest models from
Philips, Taxan, Thompson, Hantarex
etc.

SPECIAL PURCHASE

10 DISCS IN FLIP OPEN PLASTIC CASE
Single sided, double density.

ONLY £8.70 + Vat

High Tech Products from ACORN COMPUTERS:—

View WP Rom **£59.80**
Viewstore Rom **£59.80**
Views 3.0 Rom **£89.70**
Hi-view Disc **£59.80**
Viewsheet Rom **£59.80**
Viewspell Rom **£39.95**
View Index Disc **£14.95**
Database Disc **£15.35**

Printer Driver Generator
Cass. **£9.95/Disc £11.50**

Forth Rom **£49.85**
Forth Disc **£19.90**
Master Lisp C. Rom **£59.80**
Lisp Rom **£49.85**
Lisp Disc **£19.90**
MicroProlog Rom. **£79.95**
Master ISO-Pascal C. Rom **£69.00**
ISO-Pascal Rom **£69.00**
ISO-Pascal S.A.G. Disc **£34.95**
Comal Rom **£49.85**
Basic Editor Rom **£29.90**
Termulator Rom **£34.50**
Master Logo C. Rom **£69.00**
Logo Rom **£69.00**
BCPL Rom **£59.80**
BCPL Calculations Disc **£34.50**
BCPL S.A.G. Disc **£49.90**
6502 Development Pack Disc **£49.85**
GXR Model B Rom **£29.90**
GXR Model B + Rom **£29.90**
MICROTEXT DISC **£59.80**
MICRO TEXT PLUS ROM **£253.00**

STOCK CLEARANCE

OFFERS—BBC MICRO

Lord of the Rings
(Melbourne House) **£15.95 £9.95**
Rebel Planet
(US Gold) **£9.95 £5.95**
Cosmic Battle Zones
(US Gold) **£9.95 £5.95**
Bounty Bob
(US Gold) **£9.95 £5.95**
The Complete BBC
(Audiogenic) **£19.95 £11.95**
Bug Eyes
(Audiogenic) **£7.95 £4.95**
Picture Builder
(Hill McGibbon) **£9.95 £5.95**
Friend & Foe
(Hill McGibbon) **£6.95 £4.95**

ELECTRON SOFTWARE

We have Massive Stocks of Acornsoft
and Micro Power Electron Software
— all at reduced Prices!!

Ring for details.

Official Orders from Local Authorities/Govt.
depts. etc. welcome.

Write or phone for quotations.

Carriage. UK. £5.00 per item on hardware,
all other items 0.95p/order.
Export carriage at cost.

MICRO POWER'S GREATEST HITS

Doctor Who &
the Mines of Terror

BBC B + /Master 5.25 inch Disc
£9.95 JUST RELEASED!!

BBC B (16K ROM + DISC) **£19.95 £9.95**
BBC B (16K ROM + DISC) **£18.95 £8.95**
Castle Quest DISC **£14.95 £7.95**
Castle Quest CASS. **£12.95 £6.95**

Northwood House, North Street, Leeds LS7 2AA. Tel: (0532) 458800/434006
Showroom open 9.00 a.m. to 5.30 p.m. Tuesday to Saturday. Mail Order — Ring Monday to Friday.

MICROPOWER

DIY WINDOWS

WIMPs have become a popular utility on micros, so here we present a program for you to create your own windows

David Lawrence

WIMPs (or Windows, Icons, Mice, Pointers) are becoming more common on micros, mainly on business machines, such as the Apple Macintosh and IBM PC. Operating systems such as Gem are, however, being converted for home computers.

The essence of WIMPs is, of course, the mouse, which provides a very user-friendly way of moving a pointer around the screen and indicating actions. A typical action might be pointing to a small picture of a typewriter, which would call up a word-processor, then pointing to a picture of a disc, which would give a disc catalogue. Further options such as page size or format might then be chosen from a pull-down menu. Half way through the document, a diary might be needed to check a date, so if the mouse was pointed to a picture of a


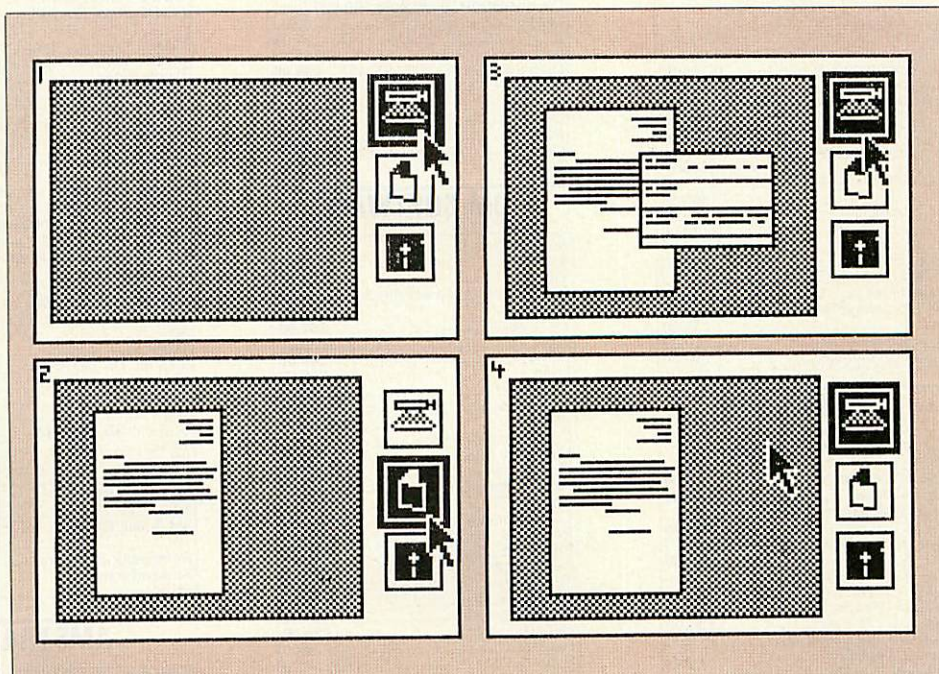


Figure 1. An example of WIMPs — pointing at the typewriter would call up a wordprocessor

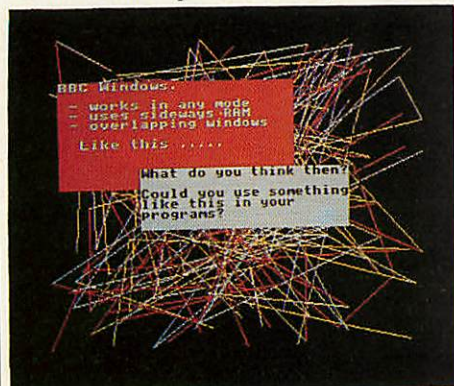

A window covering the original screen

diary, a window would be opened over the document. This window might cover some of the original screen area used by the wordprocessor, but when the diary is finished with, the window closed and control passed back to the wordprocessor, the original screen must be restored. This technique is known as 'windowing' and can also be used for constructing pull down menus (see figure 1).

A program for windowing isn't difficult to write. All it involves is copying the

section of screen memory behind the window to another part of memory and copying it back when the window is closed. My program uses sideways RAM for its window store. If you haven't got any sideways RAM, the program can be adapted to use normal memory, and if you need to do this, read the section below on adaption before continuing. This section should also be read if your sideways RAM is not in slot '&4'.

Listing 1 on the yellow pages is a machine code program that occupies two pages of memory (currently &9 and &A). Enter the program, save it and run it, the program will assemble the code, checksum it and save it as Window. If the checksum is wrong, go back and check the listing. Three procedures are needed in addition to this code, the first for initialisation, one for opening windows and lastly one for window closing.

These procedures can be found in listing 2, also on the yellow pages. They can also


be seen in listing 3 which is a short demonstration program.

If you are using sideways RAM and it has a write protect switch, ensure it is switched off before running any program using windows. The program will not work with shadow RAM.

How the program works

There are four main sections to the program, namely, 'Close Window' (lines 360-1110), 'Open Window' (lines 1130-1270), 'Main Routine' ('go) (lines 1290-2290) and 'Ending Routine' (bloop) (lines 2280-2990). 'Block header' refers to a block of memory that is saved in sideways RAM along with the window that tells the computer about various aspects of the window.

The Open Window routine starts by paging in the sideways RAM, and making a copy of the window co-ordinates (these are saved in the 'block header' in the ending routine). A flag is set to tell the main routine to copy from screen to sideways

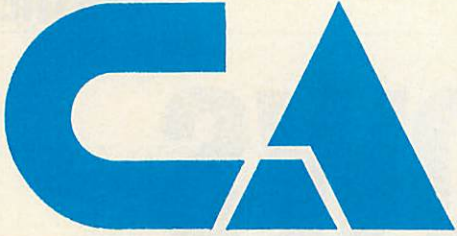

Computaccount (UK) Ltd
21 Spring Hill
Birmingham B18 7BH
Tel 021 236 3455

We are major supplier to the educational
and health sectors

Please send an SAE for our free extensive catalogue and price list. Hundreds of products listed at excellent prices.

ACORN

NEW MASTER COMPACT series. Standard system is 128K, single 3.5 inch drive, bundled software.

Compact entry system.....	£375.00
Compact TV system.....	£389.00
Compact with mono monitor.....	£459.00
Compact with colour monitor.....	£589.00
RS 232 interface for compact.....	£26.00
Extra 3.5in drive for compact.....	£99.00
PAL TV adaptor for compact.....	£26.00

Master 128.....	£395.00
Master ET.....	£319.00
Master econet module.....	£43.47
Turbo upgrade.....	£185.00
64K upgrade kit.....	£34.74
Z80 2nd processor with software.....	£346.00

6502 2nd processor.....	£175.00
10 Mbyte Hard disc with filesaver.....	£1086.95

30 Mbyte Hard disc with filesaver.....	£1608.95
Teletext receiver.....	£129.00
Prestel receiver.....	£120.00
Eprom cartridges.....	£13.00
Acorn DNFS kit.....	£82.00
1770 upgrade kit.....	£43.42
ADFS ROM.....	£26.04
ATPL Sideways RAM/ROM board.....	£36.00

View manual.....	£10.00
Viewsheets manual.....	£10.00

FLEA MARKET

All items subject to availability

EPROM programmer.....	£30.00
EPROM eraser.....	£25.00
1200/75 Modem + Comm software.....	£35.00

3.5in 1Mbyte drive, BBC B or Compact.....	£96.00
---	--------

5.25 in 1 Mbyte drive, BBC B or Compact.....	£99.00
Solidisc shadow RAM/ROM expansion BBC B.....	£50.00

256K expansion for above.....	£20.00
Spark Jet printer.....	£75.00
RH Electronics Light Pen for BBC with software.....	£36.00

Torch Light Pen.....	£25.00
Plannercalc. Torch CPN format.....	£35.00
Masterplanner. Torch CPN format.....	£85.00

Silicon Office complete. For IBM £200.00

MODEMS

Nightingale with Commstar.....	£135.00
Voyager 11.....	£99.95
WS 2000.....	£108.69

PRINTER ACCESSORIES

Epson FX 80/85 Tractor Unit.....	£32.00
Epson FX 80/85 Sheet Feeder.....	£125.00
Epson FX100/105 Sheet Feeder.....	£139.00
Brother HR sheet feeder.....	£209.00

Epson MX/RX/FX 80 Ribbons.....	£3.75
Epson MX/RX/FX 100 Ribbons.....	£4.50
Canon PW1080/1156 Ribbons.....	£8.00
Taxan Kaga KP810 Ribbons.....	£8.00
Citizen printer ribbons.....	£3.99

Massive range of other compatible ribbons available

DISC DRIVES

Opus 5802 400k DS 40/80 track.....	£95.61
Opus 5802DB dual 400k DS 40/80 track.....	£182.57

Opus 5802D dual 400k DS 40/80 with PSU.....	£234.74
Opus challenger 256k.....	£156.48
Opus Challenger 512k.....	£173.87
Pace PSD1P 100k 40T with PSU.....	£125.00

Pace PSD3P 400k 40/80T with PSU.....	£144.00
Pace PDD3P dual 400k 40/80T with PSU.....	£260.00

Akhter MD802E dual 400K DS 40/80T mounted in monitor stand.....	£266.00
Cumana CSX100 100k SS 40T.....	£99.00
Cumana CS100 100k SS 40T with PSU.....	£122.00

Cumana CS400S 400k DS 40/80T with PSU.....	£152.00
Cumana CD800S dual 400k SS 40T with PSU.....	£282.00

ROM SOFTWARE

Acorn:	
View 2.1.....	£45.00
View 3.0.....	£63.00
GXR (please state whether for B or B+)	

ISO Pascal.....	£23.00
LISP.....	£52.00
BCPL.....	£39.00
Logo.....	£46.00
Viewsheets.....	£45.00
Viewstore.....	£45.00
ADFS.....	£26.04

Computer Concepts:	
Wordwise Plus.....	£40.00
Printmaster.....	£25.00
Accelerator.....	£48.00
Speech ROM.....	£27.50
Communicator.....	£51.30
Intersheet.....	£48.00
Interchart.....	£28.50

Beebugsoft:	
Toolkit Plus.....	£33.00
Wordcase.....	£25.00
ICON master.....	£29.00

ROMIT.....	£29.00
Help II ROM.....	£27.00
Sleuth ROM.....	£27.00
Exmon II.....	£28.00

Spellcheck III.....	£32.00
MUROM.....	£24.00
Pace:	
Commstar.....	£29.57

SOFTWARE

Full range of professional CP/M and MSDOS/PCDOS software available at very attractive pricing. Call for details on Wordstar, dBase, Lotus, Framework, Symphony, Javelin, Delta, Cobol, Sage and hundreds more!

Vast Range of BBC/Acorn software for Business & Education, Scientific and Industrial applications. Send SAE for full lists and catalogue.

AMX

Please state whether for BBC or Master	
AMX mouse with Super Art ROM.....	£78.00
Pagemaker.....	£43.43
Paintpot.....	£13.00
Desk.....	£21.70
Super Art ROM.....	£43.43
Database.....	£21.70
3D Zicon.....	£21.70
Utilities.....	£13.00

DISCS

Computaccount Disks - 5.25" in sturdy library case (10's)	
SS DD 48 tpi.....	£8.50
DS DD 48 tpi.....	£9.50
DS DD 96 tpi.....	£10.50

Scotch 3m high quality 5.25" with lifetime warranty (10's)	
SSD 48 tpi Ref 744.....	£10.90
SS DD 96 tpi Ref 746.....	£15.90
DS DD 48 tpi Ref 745.....	£13.79
DS DD 96 tpi Ref 747.....	£17.50

Scotch 3M high quality 3.5" discs for Master Compact/Apricot	
Single Sided.....	£21.90
Double Sided.....	£30.20

Amstrad compatible 3" discs suitable for CF-2/CF2DD	
Double side.....	£35.00

All 5.25 discs have reinforced hub rings and carry a lifetime no quibble guarantee. They are supplied in 10's with a sturdy plastic library case for each ten. High capacity storage boxes from £8.90. Prices per 10:

5.25 inc SS DD 48tpi	
10.....	£8.50
30+.....	£7.75
100+.....	POA
5.25 inc DS DD 48tpi	
10.....	£9.50
30+.....	£8.50
100+.....	POA
5.25 inc DS DD 96tpi	
10.....	£10.50
30+.....	£9.50
100+.....	POA
3M 3.5inc SS	
10.....	£21.90
3M 3.5inc DS	
10.....	£30.20
Remember prices include library box	
Amstrad 3 inc	10.00
CF2.....	£35.00

AMSTRAD

NEW PC 1512: Prices start at £395 for basic single drive + mono monitor system. Phone for prices of other systems.	
PCW 8256.....	£399.00
PCW 8512.....	£499.00
2nd disc drive for PCW8256.....	£155.00
Serial interface for PCW.....	£59.00
Modem with Chat Chat software.....	£169.00
Wordstar deluxe.....	£60.00
Supercalc.....	£43.00
Safesoft Popular Accounts Plus.....	£130.00
Dbase II.....	£103.00
3 inch discs for PCW's.....	£4.20

'TAILOR MADE' BUSINESS SYSTEMS

Tell us your requirement and we will make up a system for you.

ACCESSORIES

Listing Paper	
11 x 9.5 (2000 sheets).....	£11.50
11 x 14.5 (2000 sheets).....	£14.50
Labels 1000 90 x 36 mm 1 across.....	£4.99
Ribbons for Epson FX/RX/MX80.....	£4.50
Ribbons for Juki, Canon etc.....	£ CALL
Computer maintenance kit.....	£13.50

PRINTERS

DOT MATRIX	
Epson LX86 120 cps 80 col NLQ.....	£229.00
Epson FX85 160 cps 80 col NLQ.....	£315.00
Epson FX105 160 cps 132 col NLQ.....	£430.00
Epson JX80 7 colour 160 cps 80 col.....	£329.00
Epson LX80/86 tractor unit.....	£20.00
Epson LO 800 180 cps 24 pin matrix NLQ.....	£459.00
Epson LQ 1000 180 cps 24 pin 132 col NLQ.....	£659.00
Olivetti DM100 80col NLQ 120cps.....	£225.00
Olivetti DM280 80col NLQ 160cps.....	£349.00
Canon PW1080A NLQ 80col 160 cps.....	£236.52
Canon A50 NLQ 80col 180 cps draft.....	£299.00
Canon A55 NLQ 156col 180 cps draft.....	£409.00
Brother 1109 Par. + Ser. 100cps + NLQ.....	£209.00
Brother 1409 Par. + Ser.....	£349.00
Brother 1509 Par. + Ser. 180cps + NLQ.....	£449.00
Brother 2024 Par./Ser. NLQ 24pin 160cps.....	£750.00
STAR. Full range stocked. Call for prices	
Star NL 10 serial NLQ 80 col 120cps.....	£279.00
Star NL 10 parallel NLQ 80 col 120cps.....	£239.00
Citizen 120D parallel 120 cps NLQ 80col.....	£199.00
Citizen LSP10 120cps Eps/IBM comp NLQ.....	£225.00
Citizen MSP10E 160cps Eps/IBM comp NLQ.....	£296.00
Panasonic KX-P 1080.....	£158.00
Panasonic KX-P 1090.....	£233.00
Panasonic KX-P 1092.....	£315.00
Panasonic KX-P 1592.....	£405.00
Micro-P MP165 NLQ.....	£208.70
Micro-P MP200 ★NEW★.....	£299.00
Parallel printer cable BBC.....	£9.00
Parallel printer cable IBM, etc from.....	£15.00

DAISY WHEELS

Sanyo PR3000.....	£199.00
Sanyo PR5200.....	£299.00
Brother HR10.....	£239.00
Brother HR15.....	£349.00
Brother HR25.....	£650.00
Brother HR35.....	£825.00
Juki 6100.....	£247.75
Juki 6200.....	£454.00
Juki 6300.....	£694.00
Juki 2200 typewriter/printer.....	£238.00

MONITORS

Mono:	
Sanyo DM4112.....	£75.00
Philips green Hi-res 7502.....	£76.00
Philips amber Hi-res 7522.....	£82.61
Zenith green.....	£78.00
Zenith amber.....	£85.00
Colour:	
Microvitec std-res 1431.....	£191.00
Microvitec med-res 1451.....	£229.00
Microvitec hi-res 1451.....	£399.00
Philips 8533 RGB Med-res + composite video.....	£251.00
Monitor cables (state types required)	
Monitor bridge single height.....	£3.50
Monitor bridge double height.....	£14.90

HOW TO ORDER

Please add 15% VAT
Payment by cheque to:
COMPUTACCOUNT (UK) LTD
Carriage: Items less than
£50: £2.50: £50-£100: £4.50
Carriage and insurance on
items more than £100: £9.50

Send to Computaccount (UK) Ltd., 21 Spring Hill, Birmingham B18 7BH or telephone 021 236 3455

NAME.....				
ADDRESS.....				
Quantity	Item	Price		Carr
		£.....	£.....	
		£.....	£.....	
		£.....	£.....	
		VAT 15% £.....		
		TOTAL £.....		

RAM and the main routine is called. Then the Main Routine finds the address of the top left hand corner of the window.

The method it uses is slightly naughty as it directly peeks the VDU variables in page three of memory (&300 - &3ff). This address is stored three times. One is stored in the block header, one is used as the address of the start of each line (pointer 1) and the other as the address for each character on the line (pointer 2). A copy is then made of the sideways RAM memory pointer which is stored in the block header. This is the address to where the window is saved in sideways RAM. Two nested loops are used for the actual transfer, one for each line and the inner one for each character. The transfer is performed within these loops. Pointer 2 is incremented, one byte at a time, in the inner loop along with the sideways RAM memory pointer. Pointer 1 is incremented by a whole line of bytes in the outer loop (again using VDU variables). These loops are repeated until the whole window is saved or recalled.

The Ending Routine contains code for both opening and closing windows. The main body of the ending routine involves creating the block header for the window saved. Figure 2 illustrates what a block header looks like. The following information is saved: window co-ordinates; sideways RAM memory pointer at the beginning of the memory block; the old text cursor co-ordinates; the foreground and background text colours. The block header is actually a block ender as it is saved after the window, making window closing easier. Finally, a text window is defined to cover the area saved, the foreground and background colours are set as specified and Basic is paged back in.

The Close Window routine pages in sideways RAM, then reads the block header. The co-ordinates of the old window are recovered and used to redefine the text window, the sideways RAM memory pointer is changed to the start of the window in sideways RAM, and then the cursor position and the old colours are restored. Colour restoration, however, is not as easy as you might think. The actual colour numbers (red = 1 etc) are not stored. Instead, the value that would be stored in a byte of screen memory to completely colour that byte to the colour required is stored (see Advanced User Guide, page 277). When a window is opened, this value is stored in the block header, but the VDU variables are write only, so simply writing the values back

does not change the colours. Therefore to change the colours back, each colour is selected in turn and the VDU variable is compared with the value stored, and when these are the same, the colour is correct. A flag is set to tell the main routine to copy from sideways RAM to screen and then the main routine is called. The section in the Ending Routine for closing windows simply resets the memory pointer to where it was before the window was opened ready for the next window.

The Basic procedures

The following procedures, PROCinit,

available for window storage, I suggest that this is set to the value of HIMEM in the mode you are using. HIMEM should be set near the beginning of your program to start, to prevent the windows being corrupted. Don't worry about the value of slot, as it can be left as it is and nothing nasty will happen.

A fair amount of memory is needed for the storage of windows, especially in modes 0, 1 and 2 (eg, 3200 bytes for a 10 x 10 mode 2 window). So think carefully about the window size.

If the sideways RAM is not in slot &4, change line 90 in listing 2 as appropriate.

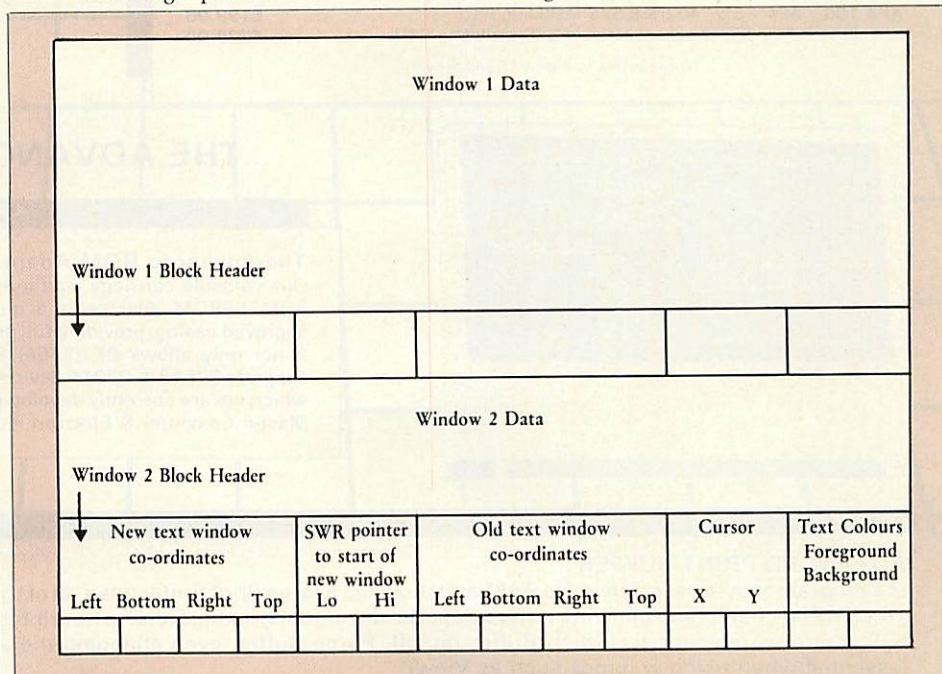


Figure 2. An illustration of the block header and information saved

PROCopen (L,B,R,T,f,b) and PROCclose should be included in your programs. All three are shown in listing 2. PROCinit sets up the variables used by the program: 'start', 'end', 'open', 'close' and 'slot'.

PROCopen opens a window. The parameters refer to left X, bottom Y, right X, top Y foreground colour and background colour. PROCclose closes the current window. PROCopen and PROCclose both contain error checking, ie, trying to open a window that is too big to fit into the remaining memory or trying to close too many windows.

Adapting the program

If you do not have sideways RAM or it is not in slot '&4', don't despair! The program is adaptable for use in normal memory. Simply change the value of start in line 70 of listing 2 to the address where you wish the windows to be stored. End should also be changed to the highest address

Also change line 640 of listing 3.

As far as I know, this program should work with any sideways RAM. It has been tested with Acorn User's UserRAM, Watford's Disc RAM and HCR's 32k board.

Unfortunately there is not enough normal RAM available to run listing 3 in its current form. Listing 3a contains some minor modifications that can be made to listing 3 to make it run in mode 4.

If anyone has any ideas for improvements or extensions to this program, I would be very pleased to hear about them. I am currently working on putting the machine code into sideways RAM as well, so windows can be opened and closed simply with *OPEN and *CLOSE. It would also be possible to compact the windows as they are stored thus enabling more, larger, windows to be opened.

Turn to page 113 on the yellow pages for details of where to find David Lawrence's 'windows' program and how to enter it.

Advanced Computer Products

THE ADVANCED PLUS FOUR

The Advanced Plus Four (A.P.4.)

- A FULLY ACORN COMPATIBLE disc I/face for the 'ELK' & Plus 1
- Accepts any standard 5 1/4" or 3 1/2" disc drive with PSU
- Supplied with 1770 DFS (as supplied on the B+ & Master series) (A.E.D. is still available for Plus 3 users at £24.15 inc.)
- Page stays at &E00, the same as Tape F.S. NO LOSS of RAM
- Will allow more tape software to be run from disc
- Access compatible BBC disc-based software. No conversion program needed
- Extra sideways ROM socket fitted as standard
- A self-contained, well finished and fully tested product
- No 'short cuts' in design, finish or components
- ROM s/ware includes format, verify, free space and utils.
- Achieve greater BBC compatibility

£69.55 (+VAT)

"I can recommend it to anyone contemplating upgrading to disc".

Electron User, June '86

"The AP4 should be considered the standard interface for the Electron".

Acorn User, July '86


AP4 SPECIAL PACKAGE PRICES

AP4 100 = AP4 + 5 1/4" 40 track S/S including PSU **£199.00**
 AP4 400 = AP4 + 5 1/4" track switchable D/S including PSU **£229.00**

These prices include VAT and delivery

"Disc drive compatibility at long last"


ELECTRON USER, JUNE '86

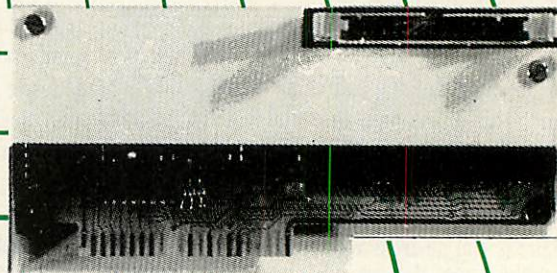

THE ADVANCED ROM ADAPTOR II

The Advanced ROM Adaptor II

Our versatile cartridge continues to grow in popularity and demand. This ROM/EPROM adaptor is a quality product fully enclosed in an Acorn approved casing, providing full protection for your valuable firmware! A.R.A. 2 not only allows 8K (2764) & 16K (27128) ROMS/EPROMS but also supports 27513 & 27011 devices (when used with the correct software) for which we are currently developing new products. Fully compatible with the Master Computer & Electron Plus I

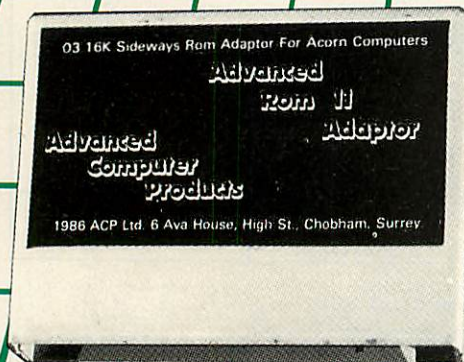

ADVANCED PRINT BUFFER

(5 1/4 ADFS) /B/M/C/ **£5.95**

Is a program that runs in sideways RAM and provides a large Print Buffer, instead of the resident 63 bytes. Large means over 14K (14700 characters) allowing letters, reports, documents, listings, etc. to be printed while you carry on with another task. Full control is provided to switch Buffer on/off, Purge Buffer, even changing the effect <ESCAPE> has on the Buffer (essential when using w/procs such as View)

ADVANCED ELITE Fs

/M/C **£5.95**

Allows Master users to run their BBC Elite Program Disc on the Master & Master Compact (5 1/4 ADFS)

ADVANCE BBC DFS E00

(5 1/4 DFS) /B+ **£19.99**

Enables B+ or upgraded B users to run 1770 DFS at E00 when used in 16K sideways RAM

AMX MOUSE

POINTS THE WAY FOR THE ELECTRON USER

AMX MOUSE

Catch an incredible AMX MOUSE! The advanced opto-mechanical device that brings to your ELECTRON facilities once only available on more expensive computers. Now you can use ICONS, WINDOWS, AND POINTERS in your own programs.

AMX PACKAGE


Plug the MOUSE into the user port, and the EPROM into your A.P.5. The latter contains fast machine code routines for creating on-screen windows, icons and pointers. And means that the MOUSE buttons can be programmed for use with commercial software such as Wordwise and View. There are two manuals included, explaining how to operate the MOUSE and the ROM routines, which are available in both basic and machine code programs.

Included in the package are two superb programs:

AMX ART has to be seen to be believed! It's a computer-aided drawing program that's just as good for serious applications - such as the preparation of detailed architectural and engineering drawings or teachers' worksheets - as it is for having lots of family fun! And if you're artistically inclined, you'll be astonished at the quality of work you can produce and save. It makes full use of on-screen menus, pull-down menus and icons: the ideal, easy way for novices to learn and gain in confidence.

ICON DESIGNER is an invaluable program for creating and storing icons for use in your OWN programs.

The ACP/AMX mouse package may be used on an ELECTRON fitted with a PLUS I & AP5. The 'ART' software is supplied on cassette but can be transferred to DISC (DFS not ADFS)

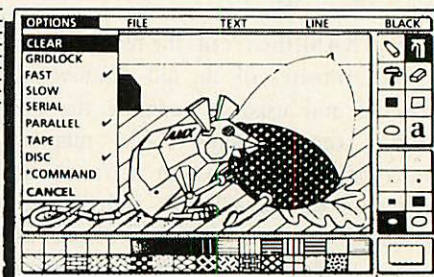

£69.95

MENU MAKER

By altering the standard Compact software, you can have a personalised Desktop menu for your own discs

David Atherton

Many Compact owners will have realised that the Desktop software, the pointer-based file selection system that comes with the machine, only knows about the files on the Welcome disc. Wouldn't it be nice if the headings and lists could be changed so that other discs could be accessed?

This article is about doing just that. Rather than alter individual lines of the Desktop program, we received Acorn's kind permission to alter the whole program and republish it (see yellow pages). The revised program reads the relevant information from a 'directory file', which we tell you how to create.

The Compact Welcome disc starts with a sequence which shows the Master logo, loads some special programs into memory and then brings up the black on light blue screen with pointer and menu bars. It is this last part which we will be altering. The program which does this last display is called Menu and is found in *DIR WELCOME on the Welcome disc.

The Menu program supplied by Acorn works in a very straightforward way. All the files and messages displayed are set up as strings of characters in the program, which makes no attempt to ascertain which files are actually on the disc. We have altered the program to read the names of files and directories which will make up your personalised menu screen from a pre-created text file, so that you don't have to tinker with lines of Basic every time you wish to extend your range of menu items. However, there is no check made that the information in the text file matches the files on the disc - that's up to you!

With our new Menu program, which you can type in from this month's yellow pages, you can have a Desktop Menu on all of your discs. Certain other files must also be on the disc, and there are some rules to be followed on the use of directories. Follow the step-by-step guide in the box

```
.....*.....*.....*.....*
Personalised Desktop Software
for the Master Compact
Acorn User December 1986
3
```

```
DIR Applications,App
View Wordprocessor,VIEW
Logotron Logo,LogLOGO
```

```
DIR Sound and Vision,Fun
Sound1,SOUND1
Sound2,SOUND2
Sound3,SOUND3
Triangle,TRI
Square,SQ
Filled Triangle,FTRI
Filled Square,FSQ
```

```
DIR Miscellany,Misc
Return to BASIC,QUIT
Return to View,*WORD
```

Figure 1. Directory file as typed into View

on page 102 to set up your Desktop. The guide has been designed to be clear even to those with little programming experience. Once installed the system is easy to use.

It might have occurred to you to alter the original program on the Welcome disc to save yourself some typing. Sadly, this is not practical. Although many lines of code in the Welcome disc program perform identical functions to the listing in the yellow pages, it is not really possible to amend the original. This is because the original program has been compressed by joining lines together, to save space. All the REMs and unnecessary spaces have been removed, and also all the variable names have been reduced to the shortest possible number of letters to save space. Acorn kindly supplied us with the original program before compression, using meaningful variable names such as MN\$ for menu name, PROCbox to draw a box etc, and the modifications have been done to this version, as a compressed program is almost impossible to modify.

More ambitious layouts

When you select an item on the Desktop Menu, the appropriate disc filename is used

to work out which program to read in. This assumes that all the programs are in Basic. However, you may wish to run machine code programs, which have to be started with *RUN, or perhaps you would like the Desktop selection to activate an operating system '*' command. Any non-destructive '*' command will, after execution, return to the main pointer routine.

To do this, just place a star in front of the filename. In the example (figure 1), selecting 'Wordprocessor' from the Desktop will start View. If View is not installed in the machine RAM, the system will try to *RUN a machine code program called Word on the disc. Sometimes, you can't be sure which ROMs might be in a particular Compact, and thus which names might be picked up as commands, so we have included an extra feature. Type two asterisks and the system will look only on disc, and not use a '*' command.

If you understand ADFS well, you will probably have realised that the file and directory instructions after the comma can refer to directories other than the selected one. For example if a chess program was in DIR Applic, then putting \$.Applic.CHESS next to the entry in the games list will find the right file even though the game is not in the directory where it ought to be. Files actually in the \$ directory can be accessed by placing them in any directory list, under a filename prefixed by '\$'.


Adding to the system

You may want to add small utilities to the Desktop which can be activated from within the Desktop itself. One way of doing this is to write a short Basic program which runs and chains back to the Menu program. This is quite easy; the program can do whatever is necessary and should end with the lines:

```
*DIR^
CHAIN "MENU"
```


Of course the Basic program itself should not alter the current directory.

At last a machine code development system that *really* does outperform ADE

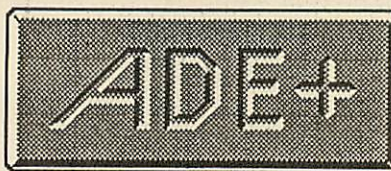

Features

- Runs on BBC B, B+, Master, Compact, ADFS, DFS, ANFS, NFS
- Full use of all available RAM
- Intelligent memory management unit (MMU)
- User switches on all main features
- Automatic search for macros on disc
- Assemble absolute or relocatable code
- Source program tokenised or full text
- REPEAT..UNTIL, WHILE..WEND etc. high level language constructs
- Macros nestable to any depth
- Excellent error diagnostics
- Link with libraries of assembled modules
- Full professional specification at home computing price!
- Print spooling system
- Links to symbolic debugger
- Editor and symbolic disassembler provided

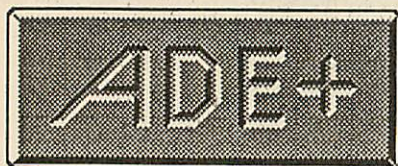

Versions and prices

Recommended for Master Compact...

ADE+ MMU and 65C00 series assembler on disc (3.5" ADFS). 32K sideways RAM required.

£42.00 + vat

Recommended for BBC B, B+ ...


ADE+ MMU and 65C00 series assembler on 2 16K EPROMS with DFS 5.25" utilities disc.

£46.00 + vat

Recommended for Master 128, turbo..

ADE+ MMU and 65C00 series assembler on EPROM cartridge with 5.25" ADFS utility disc.

£49.00 + vat

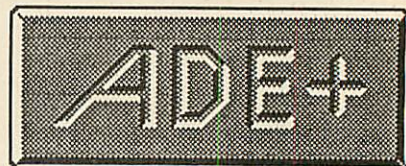

The Ultimate Assembly

Language Development Tool.

ADE+ is 65C00 series assembler system supporting all the mnemonics of the 65C12 used in the latest BBC microcomputers plus the additional 'Rockwell' instructions. ADE+ is fast, faster in fact than the in-built BASIC assembler and all rival products that we have tested. The assembler produces absolute code that can be *RUN or linker modules that can be merged with the output from other programs using the ADE+ linker. ADE+ is the only assembler available on the BBC to support a linker, normally a feature only found on minis and mainframes. The linker will even link the output from compilers with your assembly language programs. Full library support for both the linker and the assembler. Fast searching for unknown instructions in a random access macro library. ADE+ is built as a modular system with many exciting modules to add later such as a mouse based editor or a Z80 cross assembler! A print spooling system uses sideways RAM as a print buffer to eliminate waiting time: your listing runs off as a background job! Use the print spooler from BASIC or your own programs. ADE+ uses ALL available memory. With a second processor attached the IO processor spare memory is used as a buffer to reduce the amount of disc access. Up to 220K of memory is handled by ADE+'s intelligent memory management module. Use your own favourite editor or the one provided. Assemble from disc or memory. Full error diagnostics. Typeset manual with tutorial and reference guide. Supporting software disc. Available in most media formats to order, three formats as standard. (No requests for paper tape please!) Full utilities including librarians, converter for BBC BASIC etc. 32K of ROM software in the basic system. ADE+ must be *the* bargain of 1986/7! Available now.

A comparison of three 65C12 assemblers

Feature	ADE ♦	BBC Basic	MACROM
Number of pseudo-ops	64	4	36
Use of all available RAM	Yes	No	No
Macros	Yes	No	Yes
String functions	Yes	Yes	No
True macro libraries	Yes	No	No
Relocatable output	Yes	No	No
Linker with libraries	Yes	No	No
High level constructs	Yes	Yes	No
Use any editor?	Yes	No	No
Number of error reports	39+ warnings	3+BASIC errs	20
65C00 extended opcodes	All	65C12 only	65C12 only
Switch off 65C12 opcodes	Yes	No	No
ROM size	32K	16K	16K
Disassembler	Symbolic	No	Simple
Label restrictions	No	Yes	Yes

SYSTEM
Software

12 Collegiate Crescent
Sheffield S10 2BA

Tel. (0742) 682321

Access and Barclaycard welcome.

Further Information available

Listing 2 in the yellow pages is an example program which displays the amount of free space available on the disc (using *FREE) and Returns.

Another idea is to put a second copy of the program with a different DIRFILE further down in the directory structure. This would work perfectly well as long as you provided (by use of filenames like \$.MENU or ^.Prog) a route back up to the top level. The whole Menu system has been described in terms of the top-level '\$' directory, but in fact can work at any level.

Limitations

There are two conditions where the directory file is set up correctly but the software might still produce an incorrect display. The first is where the menus run off the end of the screen. The general way to avoid this is to make sure that the sum of all menu titles doesn't exceed about 65 characters. Also, for the last menu (the one furthest to the right on screen) don't generate long selection titles or the text will wrap around and spoil the display.

The other condition is a memory problem. The sprite ROM which is automatically loaded in by the Desktop front end uses sprite definition space to store the data 'underneath' a pull down menu so that it can be restored when the menu is removed. If a menu is large, for example 10 items with long descriptions, then there may be insufficient room to store the 'behind' screen and the error 'No room to get sprite' will appear.

The maximum number of items that may be placed in a menu list is 11. Using more than 11 names in a single directory entry will cause the menu to crash. Of course you can have more than 11 files in a directory, but only 11 can be accessed directly from the Desktop menu. In general it is good to restrict yourself to say half-a-dozen entries, each containing approximately six files with descriptions of up to 15 characters.

Transferring files

When you create your personalised desktop disc you have to transfer several files from the Welcome disc. You may be wondering just what each of these files is responsible for, so here are a few words on each - we will be covering them in greater depth in a forthcoming article.

● **SPRITER** This program stores one or more little pictures, known as 'sprites', and then places them anywhere you choose on screen. The Desktop calculator and clock

are sprites. Repeated drawing at slightly different positions gives an animation effect. Also included in the program is an editor to design your own sprites.

● **PMFS** This program generates and moves the pointer and stores a preferred set of screen colours which can be recalled at any time by the command *SETPAL. Once the program is installed, the pointer is activated by typing *KEYS, and then *POINTER. After this, the brown arrow keys will move the pointer around. The *DIGITAL and *MOUSE commands

(01) and Sprite ROM 0.6 (01).

Creating a boot file

A boot file is simply a collection of instructions for the computer to carry out. In essence you could call it a Basic program but without the line numbers. When a boot file is executed, the computer reads in the boot file a line at a time and executes the commands in the line. When the commands have been carried out the next line is read in and executed and so on until the end of the file has been reached.

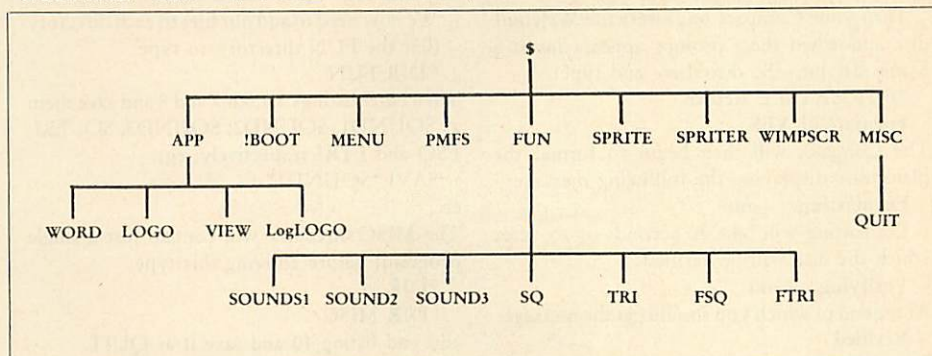


Figure 2. Directory tree for Acorn User Front End

allow you to use a joystick or mouse.

● **WIMPSPR** A collection of sprite pictures, held on disc, which are designed to work with the spriter program when using the Desktop system. There are 17 sprites in the file. To see, say, sprite five (the floppy disc), type *SCHOOSE 5 Return, then PLOT 237,640,512. To see other sprites, just type a different number after *SCHOOSE. You should first select screen MODE 128.

All three of these programs are loaded in an unusual way, using *SLOAD and *SRLOAD instead of the usual LOAD and CHAIN commands. This is because they are loaded into and run from different areas of memory than most programs. The SPRITER and PMFS programs are known as 'ROM images' because they are written in the same format as a ROM-based program (such as View or ADFS) and loaded into sideways RAM.

Most of the Desktop program code reproduced here is that from the Acorn original. I am very grateful to Acorn for their permission to do this. Although the program stands alone, it cannot work without the Pointer and Sprite ROMs. Acorn have asked me to say that they reserve the right to alter the specification of the entry point into the Pointer and Sprite ROMs.

The Personalised Desktop was developed from the unpacked version of WELCOME.MENU on the Master Compact Welcome Disc v1.02, with PMFS 136

There are two ways to create a boot file, and you should try the following demonstrations so that you become familiar with the construction and operation of each. First insert a disc into your drive and type:

*MOUNT

When the prompt reappears type:

*BUILD PRINT

The disc will whirl and a number one will appear. Type the following after the line and press Return:

MODE 7

The number two will appear so type:

PRINT "HELLO THERE"

Press Return and the number three will appear. Now press the Escape key. Once the disc has finished whirling the boot file will be complete. To test it type:

*EXEC PRINT

and the result should be some text on a mode 7 screen. The *BUILD method is fine for small boot files but for long ones it's not really useful as there is no editing facility. In such cases we can use View to write the boot file.

To try this, install View in your micro. With the Welcome disc inserted this is done using the command:

*WORD

Now type:

LOAD PRINT

Now press Escape and you should see:

MODE 7

PRINT "HELLO THERE"

Move the cursor to a blank line at the

STEP BY STEP GUIDE

Customising the front end

This guide allows you to build up a very simple personalised front end of your Master Compact. It will give you a choice of three pull down menus from which some simple options and programs may be chosen. The demonstration programs have been kept deliberately very simple to avoid confusion.

The text below is printed in a variety of ways. Information printed on screen by the computer is shown in bold print, and information that you have to type is in ordinary type.

Turn your Compact on, insert the Welcome disc and when the > prompt appears insert a blank disc into the disc drive and type:

*FORMAT 0 L Return

Format: 0? YES

The Compact will then begin to format the blank disc displaying the following message:

Formatting... <no>

Formatting will take 30 seconds or so, after which the disc will be verified:

Verifying... <no>

At the end of which you should get the message:

Verified

If any other message appears then repeat the formatting. Once you are satisfied, remove the disc and label it "AU Front End". Re-insert the Welcome disc and boot it (press Shift and Break together).

When the Welcome disc Menu program appears you can use the Device/Colour menu to select your default colours, if required. Once this is done, press Break. You will return to the plain start up screen (although it may be in a different mode).

Remove the Welcome disc and re-insert the AU Front End (AUFE) disc. Type the following, pressing Return at the end of each line:

*MOUNT

*SRSAVE PMFS 8000 A000 5

*SRSAVE SPRITER 8000 A400 4

*SPRITE

*SSAVE WIMPSPR

Type:

NEW Return

and enter the "Menu" listing (listing 1) in the yellow pages (index page 113). Once entered (and double checked), save it in the following manner:

*DIR

SAVE "MENU"

Next we need to build a boot file called \$.SPRITE and the boot file section above provides details on how to do this. The information that must be written into the boot file is as follows:

*SRLOAD SPRITER 8000 4 I

*SRLOAD PMFS 8000 S I

*SPRITE

*SLOAD WIMPSPR

Then build another boot file called !BOOT containing this text:

*BASIC

*DIR \$

CHAIN "MENU"

After this has been performed type:

*OPT 4,3

We have now completed the main task of

'conversion'. The next action on this agenda is to add our own programs. With the AUFE disc in the drive, type:

*DIR

*CDIR APP

*CDIR FUN

*CDIR MISC

As each *CDIR command is entered the disc drive will whirl as it creates new directories called APP (for applications), FUN (for games, etc) and MISC (for miscellaneous items).

We now need to add our files to each directory – first the FUN directory so type:

*DIR FUN

Then enter listings 3,4,5,6,7 and 8 and save them as SOUND1, SOUND2, SOUND3, SQ, TRI, FSQ and FTRI respectively, eg:

SAVE "SOUND1"

etc.

The MISC directory will contain just a single program; before entering this type:

*DIR

*DIR MISC

and end listing 10 and save it as QUIT.

The applications directory is slightly more complex as we need to transfer the View and Logo files from the Welcome disc to the AUFE. So take care and proceed as follows. Insert the Welcome disc and type:

*MOUNT

*WORD

this will place you in View. Insert the AUFE disc and type:

*MOUNT

*DIR APP

*SRSAVE WORD 8000 +4000 7

The View wordprocessor has now been transferred to the AUFE disc. The next step is to transfer Logotron Logo. Insert the Welcome disc, boot this and once in Logo, press CTRL and Break. Insert the AUFE disc into the disc drive and type:

*MOUNT

*DIR APP

*SRSAVE LOGO 8000 +4000 7

Enter listing 11 and save this as LogLOGO. Enter listing 12 and save this as View. The LogLOGO and View programs are responsible for loading Logo and View.

You might now like to try booting the AUFE disc, so press Shift-Break. You will get a STOP message on the screen which says 'Error, Can't find Dirfile'.

DIRFILE is the file which contains the information for the MENU bar. This can be written as a boot file. (See the directory file section opposite.) Before doing this, however, it is worth sketching out the directory tree structure of the AUFE disc. If you are not familiar with the way a directory tree is constructed, read through the Compact User Guide sections F7 to F13. Figure 2 shows the directory tree structure for the Acorn User Front End disc.

Once DIRFILE is installed on disc the AUFE finally is ready for use. This is done by booting the disc in the normal manner and selecting from the menu à la Welcome disc.

bottom and type the following:

PRINT "Compact Lovers!"

There should now be three lines of text, and you can add to this as required.

Return to the Command mode of View and save the new file using the command WRITE as follows:

WRITE PRINT

Then type:

*BASIC

*EXEC PRINT

to see the effects of the new command.

Preparing the directory file

The Desktop Menu works by reading in details from a directory file, DIRFILE, prepared in advance. You must adhere to the file format precisely for the program to work. The file is a text file and can be prepared using *BUILD or View, as described above.

The format for DIRFILE is as follows:

Lines 1–3 Three lines of text for screen 'Welcome' box

Line 4 Number of directories defined in file

Line 5 Must be blank

Line 6 DIR Screenname, Discname

Line 7 First file, FIRST

Second file, SECOND

and so on. Each directory starts with a line of the form DIR Arcade Games, GAMES1 where Arcade Games is the title which will appear on screen, and GAMES1 is a directory on the disc (containing the games).

After the directory description come the files within that directory. Each should be entered by giving the name to be displayed and the filename, separated by a comma. So an entry of Star Fire, SF1 represented a visible menu item called Star Fire which if selected will chain a file called SF1. The file SF1 will, in this case be in directory GAMES1. Figure 1 shows an example of a directory file (typed into View).

Note that spaces, colons, asterisks and so on which are not allowed in filenames can of course be used freely in the display text part of the data, which is the bit before the comma on each line.

Remember that as the Menu program is not directly reading filenames from the disc, there is no problem with multi-part programs. The directory file should however, contain a reference to only the first file in such a program.

If you are finding all these files and directories hard going have a look at the ADFS tutorial on your Welcome disc, and pages F8–F19 of the Acorn Compact Welcome manual.

reflex MAGNETICS

Now the Same High Quality but with Even More Choice

We ran the advertisement opposite and it certainly generated a lot of orders. We had a lot of people on the 'phone asking if we could supply slightly fewer disks, and as you can see, we're now offering quantities of 10's and 30's as well.

So now you can buy the same specification disks and we'll despatch the 10's and 30's in our unique Interlocking DiskBank filing system. For quantities of 50, we'll send them in a free lockable storage box.

Every disk carries a lifetime guarantee - if a disk is faulty send it back for two free replacements.


To order, just clip the coupon below.

We accept orders from all government bodies, schools, universities, PLC's etc. We despatch on receipt of an official purchase order.

If you've got a technical query ring 01-722 9727

If you're a credit card holder ring and place an immediate order on 01-722 9231.

Personal callers welcome.

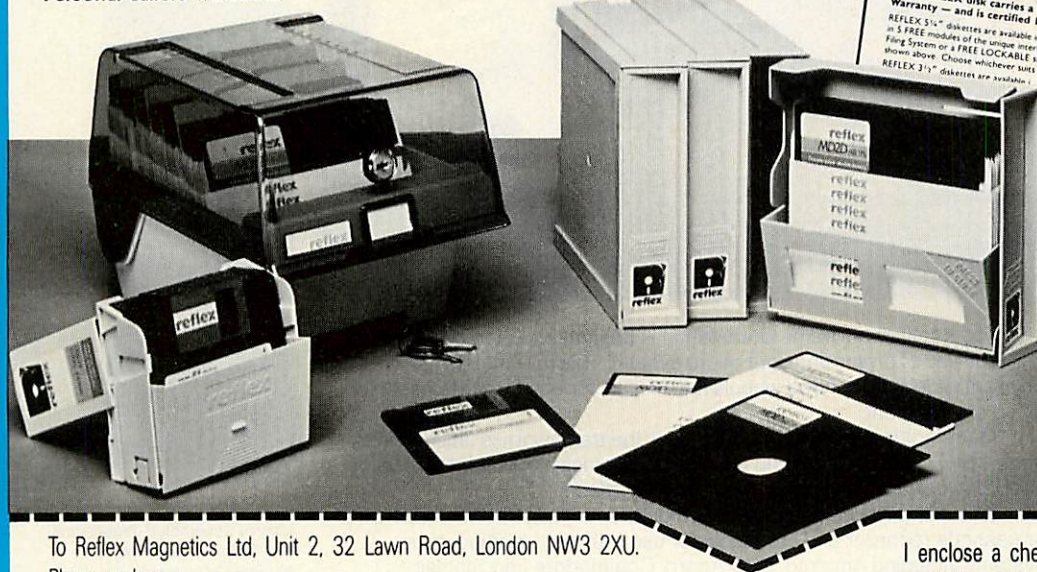

To Reflex Magnetic Ltd, Unit 2, 32 Lawn Road, London NW3 2XU.
Please rush me:

5 1/4" SSDD 48TPI	10 disks in a Diskbank box	_____ qty.	£12.80 each
	30 disks in a Diskbank box	_____ qty.	£36.40 each
	50 disks in a Lockable box	_____ qty.	£54.80 each
5 1/4" DSDD 48TPI	10 disks in a Diskbank box	_____ qty.	£15.80 each
	30 disks in a Diskbank box	_____ qty.	£46.50 each
	50 disks in a Lockable box	_____ qty.	£63.90 each
5 1/4" DSDD 96TPI	10 disks in a Diskbank box	_____ qty.	£18.10 each
	30 disks in a Diskbank box	_____ qty.	£51.10 each
	50 disks in a Lockable box	_____ qty.	£78.00 each
3 1/2" SSDD	10 disks in a Storage box	_____ qty.	£27.90 each
3 1/2" DSDD	10 disks in a Storage box	_____ qty.	£31.90 each

Prices include VAT and postage & packing.


I enclose a cheque for _____
or debit my Access/Visa card
number _____
Signature _____
Name _____
Address _____

Postcode _____
Telephone _____

MAGNETICS
reflex
DISKETTES DIRECT BY MAIL
FROM THE MANUFACTURER

AT LAST A BRIGHT IDEA IN COMPUTER WORKSTATIONS

For only £79.50.



FREE

with every workstation ordered this Plug/Tidy basket will accommodate a 4 socket in-line distribution block.

The Klick colourframe workstation is designed to provide a highly efficient way of organising your micro system. This fully mobile unit runs on silent glide rubber tyred wheels and is ideal for use in the domestic or office environment.

Manufactured from heavy duty steel, the framework is finished in a choice of 5 stylish colours and the high quality melamine faced chipboard shelves are available in either White or Teak effect.

This unit will accommodate your monitor, computer, printer, disk drive or cassette recorder and is suitable for use with most leading micro systems including Amstrad, BBC Acorn, Commodore and Sinclair.


This offer is available to UK Mainland residents only.



Buttercup Yellow



Leaf Green



Marine Blue



Mahogany Brown

Overall assembled dimensions are: 845mm (33 1/4") high, 810mm (31 7/8") wide and 610mm (24") deep.

To Store Stock Systems Ltd, FREEPOST Manchester M23 9BH

Please send me _____ (quantity) of units at £79.50 inc. VAT & carriage

I enclose a cheque for £_____ made payable to Store Stock Systems Ltd or debit my ACCESS/VISA

Card No.

Card expiry date _____ Signature _____

Name _____

Address _____

Postcode _____

(BLOCK LETTERS PLEASE)

Please write the number of units required in the boxes provided

Frame colour	Shelf colour	
	White	Teak
Poppy Red		
Buttercup Yellow		
Leaf Green		
Marine Blue		
Mahogany Brown		

Klick

ADDING COLOUR TO
COMPUTER FURNITURE



(Please allow 28 days for delivery)


B1

COMPETITION

TAKE CONTROL!

Play the numbers game and win one of five £129 Red Box control systems

Simon Dally

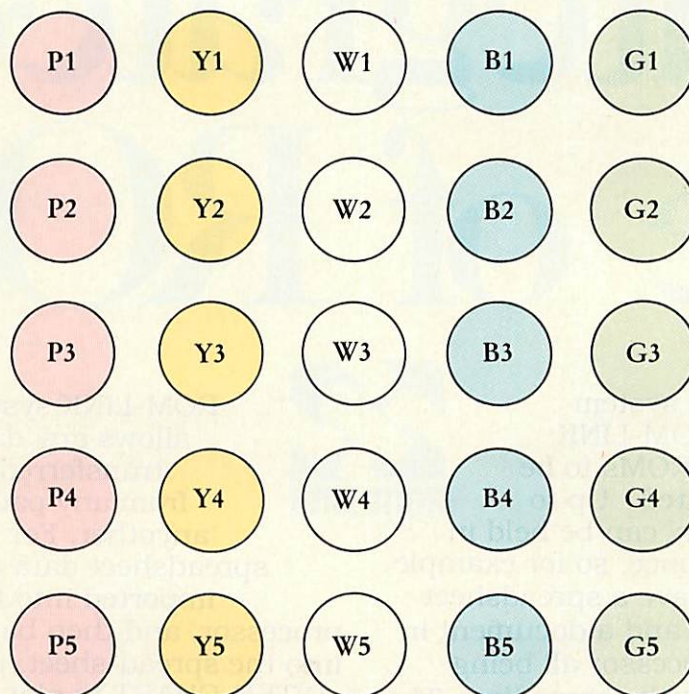

General Information Systems' Red Boxes, reviewed by Bruce Smith on page 150, are an exciting new control system for the BBC micro (including the Master and the Compact). Now you can win a Red Box starter pack – worth £129 – in this month's brain-bending competition.

The starter pack consists of three devices: Red Leader, which interfaces with your micro and which you program, Red One, which switches mains devices on and off, and Red Two, a heat-sensitive movement detector. We're giving away five of these packs to the senders of the first five correct solutions we open after December 20.

To enter the competition, you must solve all three of the following teasers, designed to get your brains and possibly your micros whirring.

1 Defining 1 billion the American way (ie, 1000 million), what is the number obtained by adding together all the numbers from 1 to a billion?

1 _____

2 _____

3 (Fill in P1, Y2, etc in the circles)

NAME _____

ADDRESS _____

2 What is the smallest integer consisting exclusively of the digits 3, 5 and 7 which is exactly divisible by each of these three digits, and the sum of whose digits is also exactly divisible by 3, 5 and 7?

3 In the illustration above, there are five different coloured counters, pink, yellow, white, blue and green, each numbered 1 to 5. Rearrange the counters in the same format (five across and five down) so that no colour or number appears more than once in any of the rows or columns, or in either of the two main diagonals.

How to enter



Fill in your answers in the entry form, left, using the blank circles for question 3, add your name and address, stick the form on a postcard or the back of a sealed envelope and send to December Competition, Acorn User, 141-143 Drury Lane, London WC2B 5TF, to arrive by December 20, 1986.

The only truly integrated suite of ROMs

This unique system allows all ROM-LINK compatible ROMs to be fully integrated. Up to 16 'packages' can be held in memory at once, so for example you could have a spreadsheet and a chart and a document in the word processor all being worked on at the same time. The



ROM-LINK system also allows any data to be transferred directly from any package to anyother. For example spreadsheet data could be imported into the word processor, and then back again into the spread-sheet, then into INTER-CHART to plot a graph.

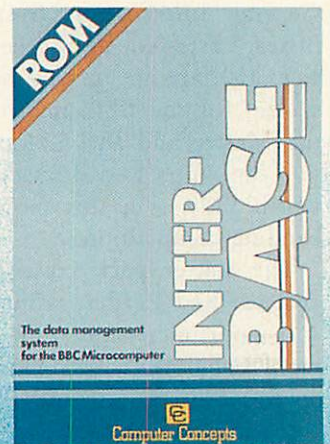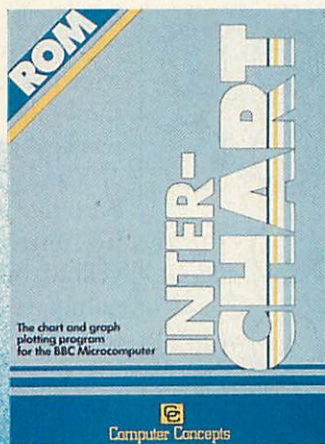

* TO BE RELEASED SOON

FOR THE BBC MICRO



Computer Concepts

The Master Compact
Compatible

INTER-WORD

The latest word processor from the same stable as WORDWISE and WORDWISE PLUS, the most successful programs ever written for the BBC Micro computer. With years of experience and feedback from users, the authors of INTER-WORD have ensured that it suits everyone's needs. A great deal of attention has been paid to ensuring that INTER-WORD is fast, efficient and above all simple to use. Being menu operated the newcomer does not need to remember strange key combinations or command names. The menus are not a burden to the experienced user since there are shortcuts to access many of the features.

REVIEWS

"the most significant program since WORDWISE." ...
"INTER-WORD on the BBC Micro compares favourably with word processors costing five or ten times as much on the IBM PC and the like." ... "INTER-WORD is a real pleasure ... a truly worthy successor to WORDWISE"

Gordon Taylor A&B Computing

"Rulers can be used to manipulate text to your satisfaction. This is a joy to use."

"INTER-WORD is certainly an advance on most other word processor packages."

Popular Computing Weekly, July '86

Technically, too, the program is astounding ...
"... quite stunning handling characteristics"

Viewfax Tubelink—August '86

"INTER-WORD is the most powerful and comprehensive word processor available for the Beeb today. It is more powerful and flexible than View and still retains much of the friendliness and ease of use of Wordwise. Inter-Word looks set to become the standard word processor for the BBC Micro."

Beebug, Aug/Sept '86

Some of its special features are:

•Automatic re-formatting

This enables the user to just type - no keys to press to re-format the paragraph after changes to the text or margins have been made; the margins on the rulers can simply be dragged, all text being instantly re-formatted to the new settings.

•Multiple documents in memory.

Most people do not work on one document at a time. INTER-WORD allows up to 16 documents to be stored in memory at once, and text to be transferred from one to another.

•Multi column

Built in facilities for printing text in up to 5 columns.

• Pull down menu operation

Simple and fast selection of all INTER-WORD options and page layout.

20% discount

Available to all WORDWISE PLUS owners. Simply quote you serial number, name and address when ordering direct. Discount price; £39.20 + VAT (£45.08 incl.)

THE NEW WORDPROCESSOR FOR THE BBC MICRO

Multi-file	File list
Current document	CHAPT1 1
manual	CHAPT2 3
Current file	CHAPT3 10
CHAPT1	CHAPT4 17
	CHAPT5 24
Insert filename	CHAPT6 30
Remove filename	CHAPT7 37
Print document	INDEX 45
Create new document	

•Multi-file operation

Very large documents can be handled with ease. INTER-WORD's unique multi-file mode puts virtually no limits on document size and allows simple and fast movement to any point in the document.

•Block operations

These are common to most word processors, but with INTER-WORD any part of the text can be marked and then instantly moved, copied, deleted, printed, saved, underlined etc. There is no limit to the amount that can be marked.

•Specific page printing

Any page or range of pages may be printed, even in multi-file mode, with any number of copies.

•File selector

The file selector displays a list of all files - move to one and select it. You will never have to type or remember filenames again.

```
Save entire text=====
IBOOT          11          accounts
CHAPT1         CHAPT2     CHAPT3
CHAPT4         CHAPT5     codes
DUMP           EXAMPLE    flist
FSEL           INDEX      IWERRATA
IWERRATA1     IWORD      LABELS
LABLIST        LETTERS    LOAD
MANUAL         PRINTERS   RAMDUMP
RUBBISH        S1
```

Select or enter filename


Select or enter filename

•On screen style changes

Underline, bold and a special 'dotted' style are shown on screen exactly as they would appear on the final printout. Also left, centred and right justified text is shown on screen as you edit. What you see on screen is really what you get on the printout.

•On screen page breaks

You need never lose your place on the page. Top and bottom spaces, with any associated headings, footings or page numbers etc. are shown at all times. Like most features in INTER-WORD, a menu option lets you turn paging off.

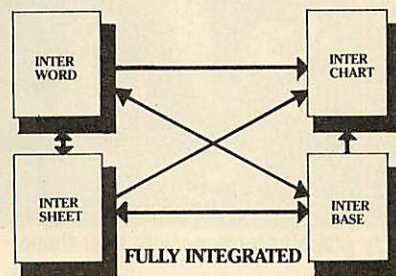

•Integrated spelling checker

To be made available soon, this entirely ROM based spelling checker allows text to be checked as it is typed or after typing, at over 9000 words per minute.

•40,53,80 and 106 column screen modes

•Mail merge

•Integrates with all other parts of INTER family

•Automatic page numbering, with headers and footers

•Very fast and smooth scrolling

•Powerful search and replace facilities including wildcards, upper/lower case sensitivity, stored search and replace strings for instant re-use.

•Automatic word count

•Fast simple cursor movement to any point

•Easily tailored to any printer

•Line numbering

•Selectable screen colours

•Compatible with the B, B+ and Master; Solidisk, Aries and Watford shadow RAM boards.

Software is now more important than the hardware, especially with today's falling hardware prices.

INTER-WORD is the most sophisticated and professional word processing package available for the BBC Microcomputer.

£49.00+ vat (£56.35)



Computer Concepts

Gaddesden Place, Hemel Hempstead,
Herts. HP2 6EX, England.
Telephone (0442) 63933

MONEY-BACK


Guarantee

Buy INTER-WORD—if you don't like it—send it back for a full refund!
(Available when purchasing direct from Computer Concepts)

ROMS

A C O R N U S E R O F F E R S

User Dump – Acorn User's printer control ROM – £19.95

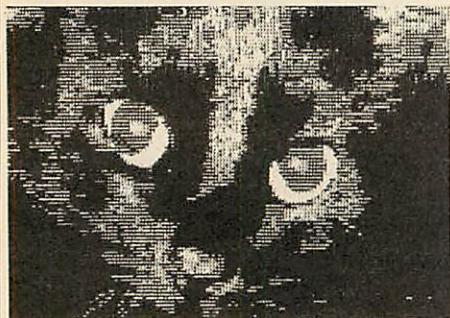

Dump graphics screens with User Dump

User Dump includes a ROM chip which plugs into any free sideways ROM socket on your BBC micro, and an easy-to-follow manual. With the *User Dump* ROM installed you'll have access to a wide range of commands to help you control your printer's facilities – all for just £19.95.

You will be able to dump any screen image in any display mode by entering a single command – either as a line of your program or alternatively by typing in


direct from the keyboard. *User Dump* will also give a perfect dump while a machine code program is running.

This versatile ROM will work with all the popular dot-matrix printers, including all those with single and double density big-image graphics.

Send an A4 SAE to Seran at Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF, for details.

Order form on page 130.

User ROM – Acorn User on a chip only £19.95

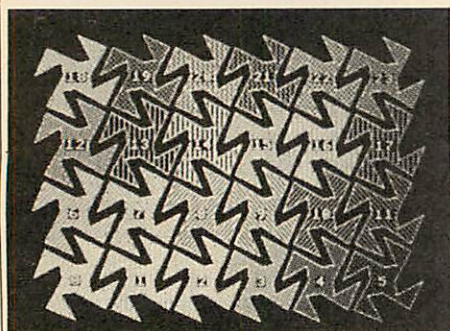

Dotfill routine from UserROM

The *Acorn User UserROM* brings the best of *Acorn User* into your micro. Put together by our technical editor, Bruce Smith, this 8k ROM chip is packed with your favourite *Acorn User* routines. Simply plug the ROM chip into a sideways ROM socket and all the routines are instantly accessible via easy-to-use *commands – what could be simpler?

Routines include the popular colour fill and dot fill routines, bad program recov-

ery, variable lister, function key lister, a graphics compiler, a circle drawing routine, sound compiler, plus lots, lots more!

Included with *UserROM* is a 22-page manual which explains how to get the most from your *UserROM*, and you'll find many demonstration programs showing how to use the new commands.

Full details available by sending an A4 SAE to Seran, Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF.

Acorn User Assembler Extension ROM just £19.95!

```
Assembler Extension ROM (AXR) 1.10
BITS (Use *BITS for help on OPT)
ASSM <src> <OPT 1> <OPT 2> <dest>
DSM <address> <ROM>
LVAR
STRIP <fsp> <(>)
FX 104,0,0 to disable
Condition: On
```

AXR for machine code programmers

The *Acorn User Assembler Extension ROM (AXR)* is aimed at the machine code programmer. It is compatible with Basic versions 1 and 2 – a Master version is due.

The AXR extends the Basic assembler to allow a variety of assembly options and commands. Some are outlined below.

- Bit 0 to 2 – Usual OPT functions
- Bit 3 set – Write to file and RAM
- Bit 4 set – Write to file only
- Bit 5 set – Branch to jump

- Bit 6 set – Enhanced error reporting
- Bit 7 set – Flag duplicate labels

The AXR adds several new pseudo op codes to the assembler. These are: ORG – sets the origin for assembly; DST – specify destination; DFB – defines a byte; DFW – define word; DFD – define double word; DFR – define string; SWR – set the sideways RAM number.


Please send an SAE to Seran at Redwood Publishing for full details.

Telephone Orders 01-836 2441 9.30am to 5.30pm. Ask for Seran – Order form on page 130

PROGRAM LISTINGS

A C O R N U S E R O F F E R S

December listings on cassette £3.95 and disc £5.95

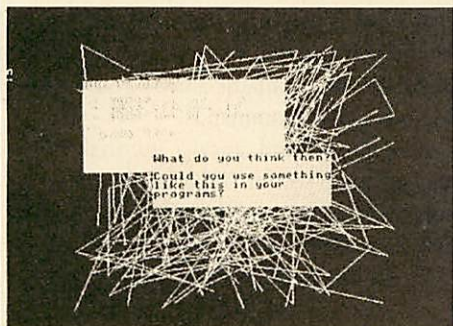

Windows from the December listings


Face the perils of *Castle of Nightmares*, this month's feature program listing. This game is especially designed to allow you to vary the level of skill required, by creating your own screens through which the hero Balbo must find his way!

Plus, use Joe Telford's procedures in your programs; combine several different screens with David Lawrence's 'Windows' and personalise the standard software included with your Compact.

All the programs in this issue are on both disc and cassette. The disc is fully menu driven and a good buy at only £5.95. Electron owners remember the disc is compatible with Advanced Plus 4 disc interface with 5.25in disc drives. There's a special graphics bonus on the cassette and disc. The cassette versions for both the BBC and Electron contains a tape to disc transfer program — all for just £3.95.

Order form on page 129.

Free offers with disc and cassette subscriptions!

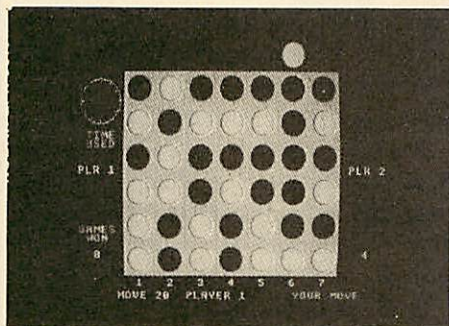

Quadline on the free Games Competition

This month you can receive our superb quality disc binder worth £9.95 when you subscribe to our monthly listings disc. Made up in grey cloth, it includes six transparent inserts each capable of holding two 5.25in discs and a protective slip case. Send £69 while this offer lasts. Overseas readers should add £7 for surface mail (and airmail to Europe), or £15 for airmail delivery (to the rest of the world).


Plus receive our new *Acorn User Games*

Compendium cassette, free, when you subscribe to our monthly cassette listings, regularly delivered each month for £45.

The *Games Compendium* features some great entertainment for BBC micro, Master and Electron owners. It includes old favourites such as *Spectramania*, *Quadline*, *Picture Slide* and *3-D Maze*. You can also go collecting apples in *Shuggy's Garden*, or be all at sea in, *Run Silent, Run Deep*.

Order form on page 129.

Acorn User bibliography on disc from £7.95

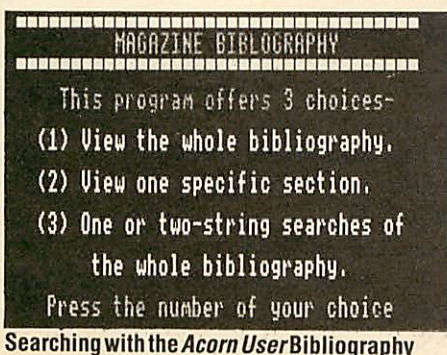

If you've ever spent hours looking through your copies of *Acorn User* for an elusive article, which you know you've seen but can't remember when or where, then what you need is the *Acorn User* bibliography!

Our bibliography contains information on where to find games, listings, educational and utility programs; reviews of hardware, firmware, peripherals, software and books; and feature articles of specific and general interest. You'll even find refer-

ence to readers' letters! The *Acorn User* bibliography is sold in parts, in a specially enhanced format, to make your searches even faster, taking about 15 seconds on the 40-track and 40 seconds on the 80-track disc. Location of a reference is by one- or two-string searching and the user may specify the starting month and year.

There are three parts currently available; part 4, will be released soon.

Order form on page 130.

Telephone Orders 01-836 2441 9.30 to 5.00pm. Ask for Seran — Order form on page 130

SPECIAL PROGRAMS

ACORN USER OFFERS

Get out of trouble with the Disc Help Disc – only £6.95

Using discs & disc drives with
your BBC Micro

MENU

- A. What are discs & disc drives?
- B. Saving & loading BASIC programs
- C. Catalogues, Directories & Libraries
- D. Copying files & whole discs
- E. Deleting files & stopping accidental deletion
- F. All about auto-booting discs
- G. All sorts of odd commands
- H. Transferring BASIC programs from cassette to disc
- I. Test on the DFS
- J. About NAMEBUG

Press A-J to run the program you want
(ESCAPE brings you back to this Menu)

The Disc Help Disc's menu page

Have you just bought a disc interface or disc drive? Do you have a disc interface and drive but are bamboozled by all the jargon? Do you simply want to know all about discs and how to use your disc filing system ROM to its full potential?

If you answer yes to any of these questions then *Acorn User* has the answer in the form of the *Disc Help Disc*, specially developed for the magazine by the North and Mid-Essex BBC Users Group.

Simply insert the *Disc Help Disc* into your drive and all the information you will ever need is at your fingertips. All aspects of file maintenance are covered and a disc filing system simulator allows you to practise use of the commands.

A question and answer tutorial at the end of each section ensures that you are able to evaluate your own knowledge. The disc is in 80-track format only.

Order using the form on page 130.

Wise up with the Education Disc at just £7.95



The Education Disc menu page

The *Education Disc* contains programs drawn from *Acorn User* magazine.

Eco-Fax is a sophisticated viewdata-type database for use on Econet systems, and comes with its own versatile frame editor. There is a colourful version of *Turtle Logo*; a program which shows equations as graphs; and a music writing program which allows you to edit tunes.

Graphics are a strong feature of the collection, including the *Easyplot* drawing

software, supported by two other programs which use *Easyplot* screens as an electronic noticeboard or in place of an overhead projector. A bulletin board displays messages in scrolling characters.

There are routines to use in your own Basic programs – screen dumps, a machine code utility and graphics plotting and drawing commands in mode 7. The disc is available in 40 track format only.

Order form on page 130.

Network Utility Disc only £19.95



Bring teletext information to networks

The *Acorn User Network Utility Disc* is the logical addition to your network, combining a wide range of invaluable routines with a sophisticated, yet easy-to-use teletext information system. The disc features:

- NetFax – our hybrid information system, provides thousands of pages of information which may be read without affecting any text or program in memory. It features an advanced teletext editor.
- Utilities for all network users, including

a file locator and directory size finder.

- Utilities for network managers, including a bridge-compatible screen viewer and an efficient 'notify-all' facility.
- An auto-installer to transfer all of our utilities to your net painlessly.
- 150 NetFax pages, including instructions, help pages and sample indexes.

The *Acorn User Utility* disc is in 80-track format and costs just £19.95.

See page 130 for your order form.

Telephone Orders 01-836 2441 9.30am to 5.00pm. Ask for Seran – Order form on page 130

SPECIAL PROGRAMS

ACORN USER OFFERS

Graphics Utilities Disc a bargain at £7.95



The Graphics Utilities Disc makes life easy

The *Graphics Utilities Disc* is divided into three easy to use sections.

The Basic procedure library includes multi-height text, shape drawing and screen rotation.

The sprites section designed as a fully integrated package includes: sprite designer, editor, mover, wipe collision detection and levels.


The third section contains an assortment of useful one-off machine code utilities,

which perform specific functions such as mode conversion routines, colour filling routines, block graphics, move and copy routines, block rotation and reflection routines.

This disc is only available in 40-track format, but includes an 80-track transfer program. Please note that *Acorn User* retains the right to alter the contents of this disc without obligation.

Turn to page 130 to order.

Acorn User's comprehensive Printer Help Disc at £7.95

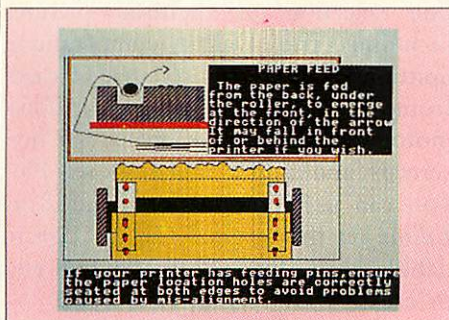

Printer Help Disc: much more than a manual

Written by Benjamin Rietti, the programs and tutorials on this disc will help you to understand your printer's facilities.

Printer manuals often don't fully cover the needs of Master and BBC micro series owners – our printer help disc will! It includes what to look for in a printer, controlling type styles, using *Wordwise* and *View*, screen images, printer care, an ASCII standard codes table plus how to print £ signs, clear diagrams illustrating


various stages of printer use and a program to display type styles. The *Printer Help Disc* will help you solve problems.

The disc is available in 40 and 80 track format, and is compatible with the BBC models B, B+ and Master 128.

For more printer compatibility details please send a stamped addressed envelope to Seran, Redwood Publishing 141-143 Drury Lane, London WC2B 5TF.

Order form on page 130.

Acorn User's Sideways RAM Utilities Disc £9.95

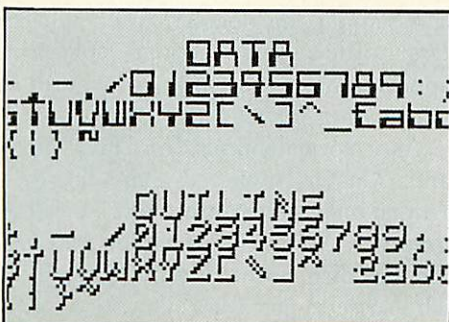

Fonts from the Sideways RAM Utilities Disc

What could be more helpful than our new *Sideways RAM Utilities Disc*?

Available in 40 track format with a transfer program for 80 track users, the disc includes:

- Standard header – tack on your own assembly language programs to form into a sideways RAM image.

- On screen fonts – redesign the standard BBC micro character set using the built in character designer and display the new

fonts in any graphics mode.

- *HLP ROM – gives instant help on sideways RAM and facilities to add your own *HLP messages.

- *RLOOK and *ROMS look into sideways RAM memory locations and list the ROMs present.


Plus lots, lots more. Order using the form on page 130. Note: *Acorn User* retains the right to alter the contents of this disc without obligation.

Telephone Orders 01-836 2441 9.30am to 5.30pm. Ask for Seran – Order form on page 130

SPECIAL PROGRAMS

ACORN USER OFFERS

Acorn User Finest Favourites Cassette – just £3.95

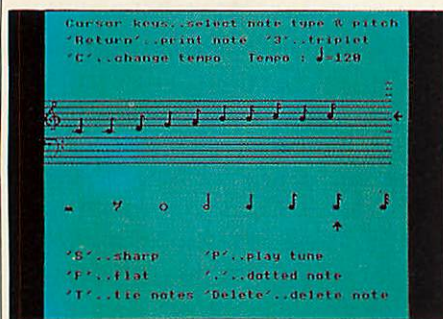

Tunemaker: an Acorn User favourite

Following the popularity of the *Best of Acorn User* Cassette, we introduce our new favourites selection.

Don't miss captivating curves with *Lisajous Figures* (Nov 85). Use our *Screen Fonts* (Dec 85) to annotate charts and diagrams. And why not save those graphics screens in less space with the *Screen Compression* program (Dec 85).

Cheat at the popular game *Elite* with our *Elite Editor* (Feb 86). Try entering

music with *Tunemaker* (March 86). There are *Basic Extensions* (Apr 86) and for the graphics treat of the year the *Mandelbrot Set* (May 86). And last but not least, *Puzzles* (July 86).

Programs will work on the Electron BBC and Master computers. You'll find the order form for *Finest Favourites* and *Best of Acorn User* on page 130 – order now and start having some fun!

New this month! The Gallery Collection – great graphics for only £6.95!



Dallas captured on the Gallery Collection

Christmas is not far around the corner, and with you in mind we've put together another stunning range of graphics screens, called the *Gallery Collection*. Combine the *Gallery* disc and *Gallery Collection* disc and you'll have an ideal gift for the graphics enthusiast or treat yourself!

The *Gallery Collection* features an automatic scrolling display of over 25 exciting graphics screens. Enjoy our

fine selection of digitised pictures including the Dallas compendium, Spitting Images, and a picture of earth from space. Plus super cartoons, motor cars, some science fiction screens and much much more. Plus you can use *Super Painter* and *Pixel Editor* on the original *Gallery* disc to dabble with a little creativity and edit or create your own screens.

See page 130 for your order form.

Acorn User's Games Compendium Cassette – £3.95



Shuggy's Garden on the Games Compendium

The *Acorn User Games Compendium* brings the best games published in *AU* over the past two years to BBC micro, Master and Electron owners. Included are David Acton's blockbuster *Spec-tramania* and the popular *Quadline* – see if you can get four in a row! Puzzle fanatics will get great enjoyment from our *Picture Slide* game while many will be amazed at Dave Lawrence's 3-D *Maze*. Adventurers

can sample the delights of the *Acorn User* office. Why not go, collecting apples in *Shuggy's Garden*, or be all at sea in *Run Silent, Run Deep*?

As a special bonus for BBC micro and Master owners, there is Rob Anderson's adventure with scrolling graphics. All programs can be transferred to disc automatically if desired. The cassette costs £3.95.

See page 130 for your order form.

Telephone Orders 01-836 2441 9.30 to 5.00pm. Ask for Seran – Order form on page 130

ACORN USER MAGAZINE
SUBSCRIPTIONS
A CHRISTMAS GIFT THAT
IS APPRECIATED EVERY
MONTH OF THE YEAR

At only £17.50, a year's subscription to Acorn User, the most stimulating, informative and entertaining magazine for the complete Acorn range of micros, makes the perfect present for family or friends.

Take out a subscription today and we'll send you the Acorn User Games Compendium cassette worth £3.95, absolutely FREE. The Games Compendium cassette includes Maze, Spectrmania, Shuggy's Garden and many more of your favourite games.

This offer is only available to UK subscribers. Please allow 28 days for delivery of your cassette.

Please start a year's subscription to Acorn User from the _____
issue and send it to the following address:

NAME	ADDRESS
	POSTCODE

Tick box ☐ if you would like a gift card to be sent.

I would like the FREE Acorn User Games Compendium cassette to go to

NAME	ADDRESS
	POSTCODE

I enclose my cheque/postal order for £17.50 made payable to Redwood Publishing Ltd ☐
Please debit £17.50 from my Access/Barclaycard/American Express ☐

Account No:

--	--	--	--	--	--	--	--	--	--

 Expiry Date

--	--	--

SIGNED _____ DATE _____

SEND THIS FORM WITH YOUR REMITTANCE TO CHRISTINE ALLEN, ACORN USER SUBSCRIPTION,
LAMBOURN WOODLANDS, NEWBURY, BERKSHIRE, RG16 7TW.

ORDER YOUR COPY NOW!

Your local newsagent or Computer dealer will be pleased to reserve a copy of Acorn User each month. Many newsagents will deliver Acorn User straight to your door. To take advantage of these services, complete the coupon below. Please reserve me a copy of ACORN USER every month until further notice.

☐ I will collect it ☐ Please deliver to my house
(tick as required)

NAME _____

ADDRESS _____

Acorn User is distributed to the news trade by Comag.

Tel: (0895) 4440555.

Computer Dealers can place orders with Seran on 01-836 2441.

ACORN USER'S GRAPHICS GALLERY

The Gallery Collection disc and our original Gallery disc will make an ideal Christmas gift for all graphics fans. The new Gallery Collection contains digitised screens which automatically scroll through scenes from Dallas, spitting images, a picture of earth from space, as well as many cartoons and sci-fi screens. Both discs are a real Christmas bargain at only £6.95 each.

ACORN USER SPECIAL CASSETTES FOR CHRISTMAS

For great stocking fillers at only £3.95 each, Acorn User special cassettes are perfect Christmas gifts. There are four special cassettes in the range, including the popular Best of Acorn User and Acorn User Graphics cassettes, which are joined this month by Acorn User's Finest Favourites and the Acorn User Games Compendium.

You will find many more Christmas gift ideas on the Acorn User offer pages (108-112).

YELLOW PAGES

INDEX / COMPATIBILITY

Program	Page	BBCB	BBCB+/ 128k	BBC with ADFS	Shadow RAM	Electron	Electron with Plus 1	Electron with Plus 1 & Plus 3	Master 128	Master 128+ ADFS	Master Compact	6502SP	Econet	Monthly tape & disc
Joe's Jottings Listing 1-12	113	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Castles of Nightmares Listing 1	117	Y	Y	N	N	Y	Y	N	Y	Y	Y	N	Y	Y
Listing 2	120	Y	Y	N	N	Y	Y	N	Y	Y	Y	N	Y	Y
Listing 3	122	Y	Y	N	N	Y	Y	N	Y	Y	Y	N	Y	Y
Listing 4	123	Y	Y	N	N	Y	Y	N	Y	Y	Y	N	Y	Y
Windows Listing 1	124	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	Y	Y
Listing 2	125	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	Y	Y
Listing 3	126	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	Y	Y
Listing 3a	126	Y	Y	Y	N	Y	Y	Y	Y	Y	Y	N	Y	Y
Menu Maker Listings 1-12	127	N	N	N	N	N	N	N	N	N	Y	N	N	Y

Y = Yes N = No

See Joe's Jottings, page 81

Listing 1. Procedure to do PRINTUSING

```

10 REM Listing 1 - PROCusing
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 REM Procedure to do PRINTUSING
70 :
80 REPEAT:PRINT
90 INPUT x:PROCusing("#.##E+",x)
100 PRINT:PROCusing("+###.###",x)
110 PRINT:PROCusing("L###.###",x)
120 PRINT:PROCusing("*   ##.###      *"
,x)
130 PRINT:PROCusing("*   ##.#####  *-"
,x)
140 PRINT:PROCusing("+*   ##      *
",x)
150 UNTIL FALSE
160 :
170 DEF PROCusing(m$,no)
180 LOCAL v$,min,mpos,spos,eflag,lp%,dp
,dps,fig,figs
190 v$="`$ *":IF no<0 min=1 ELSE min=0
200 no=ABS(no):dp=INSTR(m$,".")
210 dps=dp
220 REPEAT:dps=dps+1
230 UNTIL MID$(m$,dps,1)<>"#"
240 dps=dps-dp-1:fig=INSTR(m$,"#")
250 figs=0
260 REPEAT:fig=fig+1:figs=figs+1
270 UNTIL INSTR("#.",MID$(m$,fig,1))=0
OR fig>LENm$
280 spos=INSTR(m$,"+")
290 IF spos>1 spos=2
300 mpos=SGN(INSTR(m$,"-"))
310 IF spos>0 mpos=0

```

Continued ►

◀ Joe's listing 1 continued

```

320 eflag=SGN(INSTR(m$,"E"))*&010000
330 @%=&020000-eflag+(dps+(eflag DIV &1
0000))*256+figs
340 IF eflag=0 AND dp=0 THEN @%=figs:no
=INTno
350 FOR lp%= 1 TO LENm$
360 IF INSTR(v$,MID$(m$,lp%,1))>0 PRINT
MID$(v$,INSTR(v$,MID$(m$,lp%,1)),1);
370 IF MID$(m$,lp%,1)="#" PROCsigns(spo
s,min,mpos,0):PRINTno;:PROCsigns(spos,min
,mpos,1):lp%=lp%+figs-1
380 NEXT lp%
390 @%=&090A
400 ENDPROC
410 :
420 DEF PROCsigns(sp,m,mp,pos)
430 IF pos=0 AND sp=1 AND m=0 PRINT"+";
440 IF pos=0 AND sp<2 AND m=1 AND mp=0
PRINT"-";
450 IF pos=1 AND sp=2 AND m=0 PRINT"+";
460 IF pos=1 AND (sp=2 OR mp=1) AND m=1
PRINT"-";
470 ENDPROC

```

Listing 2. To check length and valid characters

```

10 REM Listing 2 - FNinputusing
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 REM Function to handle smart
70 REM INPUT checking length and

```

Continued ►

YELLOW PAGES

JOE'S JOTTINGS

◀ Joe's listing 2 continued

```

80 REM valid characters. PROCvalid
90 REM should always be used with
100 REM FNinputusing.
110 :
120 PROCvalid
130 forename$=FNinputusing(cap$+" ", "#
#####")
140 PRINT forename$
150 END
160 :
170 DEF FNinputusing(valid$,match$)
180 PRINT match$;STRING$(LENmatch$,CHR
$8);
190 LOCAL a$,b$,char
200 char=ASC(LEFT$(match$,1))
210 a$=""
220 REPEAT
230 b%=GET
240 IF b%=13 UNTIL TRUE:=a$
250 IF b%=127 AND a$>" " a$=LEFT$(a$,LE
Na$-1):VDU 8,chr,8:UNTIL FALSE
260 IF INSTR(valid$,CHR$b%)=0 OR LENA$
=LENmatch$ OR b%=127 VDU 7:UNTIL FALSE
270 VDU b%
280 a$=a$+CHR$b%
290 UNTIL FALSE
300 :
310 DEF PROCvalid
320 cap$="ABCDEFGHIJKLMNOPQRSTUVWXYZ"
330 low$="abcdefghijklmnopqrstuvwxyz"
340 pun$=".,;:!' "
350 nos$="01234567890"
360 math$="nos$+"~^.*<+>"
370 all$=""
380 FOR loop%=32 TO 126
390 all$=all$+CHR$(loop%):NEXT
400 ENDPROC

```

Listing 3. Entering titles such as Dear

```

10 REM Listing 3 - Enter title
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 REM Function to enter title
70 REM as in Dear ..... Uses
80 REM FNinputusing and PROCvalid
90 :
100 title$=FNtitle
110 END
120 :
130 DEF FNtitle
140 LOCAL t$,title$:PROCvalid:CLS
150 PRINTTAB(0,12);"Please enter your
title: ";
160 REPEAT PRINTTAB(25,12);
170 title$=FNinputusing("DFMIRS", "....
")
180 t$=title$+STRING$(4-LENtitle$, " ")
190 UNTIL INSTR("DR FR MR MS SR M
RS SIR MISS",t$)>0
200 PRINT " O.K."
210 =title$

```

Listing 4. Procedure to enter and check date

```

10 REM Listing 4 - Enter date
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 REM Procedure to enter and check
70 REM date. Uses FNinputusing+PROCva
lid
80 :
90 date$=FNgetdate
100 END
110 :
120 DEFFNgetdate
130 PROCvalid
140 CLS
150 REPEAT
160 REPEAT
170 PRINT TAB(0,12);"Please enter date
: DD/MM/YY"
180 REPEAT
190 PRINTTAB(19,12);
200 day$=FNinputusing(nos$,"DD")
210 UNTIL LENday$=2 AND day$<"32" AND
day$>"00"
220 REPEAT PRINTTAB(22,12);
230 mon$=FNinputusing(nos$,"MM")
240 UNTIL LENmon$=2 AND mon$<"13" AND
mon$>"00"
250 IF INSTR("04060911",mon$)>0 AND da
y$="31" VDU7:UNTIL0
260 IF mon$="02" AND day$>"29" VDU7:UN
TILO
270 UNTIL TRUE
280 REPEAT PRINTTAB(25,12);
290 yr$=FNinputusing(nos$,"YY")
300 UNTIL LENyr$=2
310 IF VAL(yr$) MOD 4 > 0 AND mon$="02
" AND day$="29" VDU7:UNTIL0
320 UNTIL TRUE
330 PRINT " O.K."
340 =yr$+mon$+day$

```

Listing 5. Creating initial stocklist

```

10 REM Listing 5 - Enterstock
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 MODE 3
70 PROCvalid:max=100:CLS
80 DIM Item$(max),stock$(max),reorder
$(max)
90 PRINT"Creating Initial stocklist -
Type END to conclude"
100 :
110 total=0
120 FOR item%=1 TO max
130 total=total+1:PRINT
140 Item$(item%)=FNitemname(item%)
150 IF Item$(item%)="END" top=item%:it
em%=max+1
160 IF item%<=max stock$(item%)=FNstoc
kamount
170 IF item%<=max reorder$(item%)=FNda
ngerlevel
180 NEXT item%
190 END
560 :

```

Continued ▶

YELLOW PAGES

JOE'S JOTTINGS

◀ Joe's listing 5 continued

```

570 REM simple itemname input routine
580 DEF FNitemname(n)
590 PRINT n;" Item name: ";
600 REPEAT PRINTTAB(22,VPOS);
610 item$=FNinputusing(all$,"-----
-----")
620 UNTIL item$>" "
630 =item$
640 :
650 REM Get amount of stock
660 DEF FNstockamount
670 PRINTTAB(38,VPOS);"Stock: ";
680 REPEAT PRINTTAB(45,VPOS);
690 stock=VAL(FNinputusing(nos$,"###")
)
700 REM but check until stock is
710 REM between 0 and 128 items
720 UNTIL FNcheck(stock,0,128)
730 =stock
740 :
750 REM enter reordering level
760 DEF FNdangerlevel
770 PRINTTAB(58,VPOS);"Reorder at: ";
780 REPEAT PRINTTAB(71,VPOS);
790 reorder=VAL(FNinputusing(nos$,"###
"))
800 REM must occur between 12 and 60
810 UNTIL FNcheck(reorder,12,60)
820 =reorder
830 :
840 REM Now the range check function
850 DEF FNcheck(quantity,low,high)
860 IF quantity>=low AND quantity<=high
THEN =TRUE
870 VDU 7:=FALSE
880 DEF FNinputusing(valid$,match$)
890 PRINT match$;STRING$(LENmatch$,CHR
$8);
900 LOCAL a$,b$,char
910 char=ASC(LEFT$(match$,1))
920 a$=""
930 REPEAT
940 b%=GET
950 IF b%=13 UNTIL TRUE:=a$
960 IF b%=127 AND a$>" " a$=LEFT$(a$,LE
Na$-1):VDU 8,char,8:UNTIL FALSE
970 IF INSTR(valid$,CHR$b%)=0 OR LENA$
=LENmatch$ OR b%=127 VDU 7:UNTIL FALSE
980 VDU b%
990 a$=a$+CHR$b%
1000 UNTIL FALSE
1010 :
1020 DEF PROCvalid
1030 cap$="ABCDEFGHIJKLMNPOQRSTUVWXYZ"
1040 low$="abcdefghijklmnopqrstuvwxyz"
1050 pun$=".,:!' "
1060 nos$="01234567890"
1070 math$=nos$+"=-~^.* /+<>"
1080 all$=""
1090 FOR loop%=32 TO 126
1100 all$=all$+CHR$(loop%):NEXT
1110 ENDPROC

```

Listing 6. Routine to add to listing 5

```

10 REM Listing 6 - Save Lists
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :

```

Continued ▶

◀ Joe's listing 6 continued

```

200 REM these routines can be added
210 REM to Listing 5, the ENTERSTOCK
220 REM program
230 :
240 REPEAT
250 PRINT "Save to Filename: ";
260 f$=FNinputusing(cap$,"=====")
270 UNTIL FNsparefile(f$)
280 PROCsavelists(f$,top)
290 END
300 :
310 REM rest of program....
320 REM function to check disc
330 REM for an unused file
340 :
350 DEF FNsparefile(f$)
360 LOCAL channel
370 :
380 channel=OPENIN(f$):CLOSE# channel
390 IF channel=0 THEN =TRUE ELSE =FALS
E
400 :
410 REM procedure to save lists
420 DEF PROCsavelists(f$,t)
430 LOCAL loop%:PRINT
440 channel=OPENOUT(f$)
450 PRINT# channel,t
460 FOR loop%=1 TO t
470 PRINT"Records left to save:"t-loop
%:VDU 11
480 :
490 PRINT# channel,Item$(loop%)
500 PRINT# channel,stock%(loop%)
510 PRINT# channel,reorder%(loop%)
520 NEXT
530 CLOSE# channel
540 PRINT"All saved. ";STRING$(25," ")
550 ENDPROC

```

Listing 7. To load a set of related lists

```

10 REM Listing 7 - Load lists
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 REM Program and routines
70 REM to load a set of related
80 REM lists from a sequential file
90 REM FNinputusing & PROCvalid are
100 REM both needed.
110 :
120 MODE 3
130 PROCvalid
140 max=100:CLS
150 DIM item$(max),stock%(max),reorder
%(max)
160 :
170 REPEAT
180 PRINT "Load from filename: ";
190 f$=FNinputusing(cap$,"=====")
200 UNTIL FNfileexists(f$)
210 top=FNloadlists(f$)
220 PROCprintlists(top)
230 END
240 :
250 REM Check disc for a named file
260 DEF FNfileexists(f$)
270 LOCAL channel

```

Continued ▶

YELLOW PAGES

JOE'S JOTTINGS

◀ Joe's listing 7 continued

```

280 channel=OPENIN(f$)
290 CLOSE# channel
300 IF channel=0 THEN =FALSE ELSE =TRUE
E
310 :
320 REM Loading routine
330 DEF FNloadlists(f$)
340 LOCAL loop%,t:PRINT
350 channel=OPENIN(f$)
360 INPUT# channel,t
370 FOR loop%=1 TO t
380 PRINT"Records left to load:"t-loop
%:VDU 11
390 INPUT# channel,item$(loop%)
400 INPUT# channel,stock%(loop%)
410 INPUT# channel,reorder%(loop%)
420 NEXT
430 CLOSE# channel
440 PRINT"All loaded. ";STRING$(25," ")
450 =t
460 :
470 REM Print whatever is loaded
480 DEF PROCprintlists(t)
490 FOR loop%=1 TO t
500 PRINT item$(loop%);STRING$(20-LENi
tem$(loop%)," ");
510 PRINT stock%(loop%);
520 PRINT reorder%(loop%)
530 NEXT
540 ENDPROC

```

◀ Joe's listing 9 continued

```

130 INPUT# channel,list$(loop%)
140 NEXT
150 CLOSE# channel
160 PRINT"All loaded. ";STRING$(25," ")
170 =t

```

Listing 10. Function to return the average

```

10 REM Listing 10 - Average List
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 DIM list(100)
70 PRINT"Enter numbers: enter -1 to f
inish"
80 top%=0
90 REPEAT top%=top%+1
100 INPUT list(top%)
110 UNTIL list(top%)=-1 OR top%=100
120 IF list(top%)=-1 THEN top%=top%-1
130 PRINT"The average of these numbers
is: ";FNaverage(top%)
140 END
150 :
160 DEF FNaverage(t%)
170 LOCAL total,loop%
180 total=0
190 FOR loop%=1 TO t%
200 total=total+list(loop%)
210 NEXT
220 =total/t%

```

Listing 8. To save a list of items

```

10 REM Listing 8 - Save Lists
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 DEF PROCsavelist(f$,t)
70 LOCAL loop%,t
80 PRINT
90 channel=OPENOUT(f$)
100 PRINT# channel,t
110 FOR loop%=1 TO t
120 PRINT"Records left to save:"t-loop
%:VDU 11
130 PRINT# channel,list$(loop%)
140 NEXT
150 CLOSE# channel
160 PRINT"All saved. ";STRING$(25," ")
170 ENDPROC

```

Listing 11. Function to return largest number in a list

```

10 REM Listing 11 - Max List
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 DIM list(100)
70 PRINT"Enter numbers: -1 ends."
80 top=0
90 REPEAT top=top+1
100 INPUT list(top)
110 UNTIL list(top)=-1 OR top=100
120 IF list(top)=-1 THEN top=top-1
130 item=FNmax(top)
140 PRINT"The largest item is no: ";it
em
150 PRINT"Which has a value of : ";lis
t(item)
160 END
170 :
180 DEF FNmax(t)
190 LOCAL max,item,loop%
200 max=-1E38:item=0
210 FOR loop%=1 TO top
220 IF list(loop%)>max THEN max=list(l
oop%):item=loop%
230 NEXT
240 =item

```

Listing 9. Function to load a list from a sequential file

```

10 REM Listing 9 - Load List
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 DEF FNloadlist(f$)
70 LOCAL loop%,t:PRINT
80 channel=OPENIN(f$)
90 INPUT# channel,t
100 DIM list$(t)
110 FOR loop%=1 TO t
120 PRINT"Records left to load:"t-loop
%:VDU 11

```

Continued ▶

YELLOW PAGES

JOE'S JOTTINGS

Listing 12. Find the smallest item in a list

```

10 REM Listing 12 - Min List
20 REM by Joe Telford
30 REM for BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 DEF FNmin(t)
70 LOCAL min,item,loop%
80 min=1E38:item=0
90 FOR loop%=1 TO t
100 IF list(loop%)<min THEN min=list(
loop%):item=loop%
110 NEXT loop%:return item

```

How to enter Castle of Nightmares

Listing 1 contains four separate checksums, so any typing errors will show up. The program will not checksum the VDU 23 statements on a Master, therefore double check the VDU 23 statements.

Due to lack of memory listing 3 is very compact. Be careful when entering the listing as any extra characters will give a 'no room' error. Also, do not enter the REMs at the beginning of the program.

The game stores code from £1200 to £1900 so BBC ADFS and Electron users with Plus 3 will have to use the tape version.

Listing 4 contains three sample screens in a special compacted format to start you off. When run screens A to C will be created, checked for errors and saved in the 'S' directory. Master users should create the directory 'S' first by inserting the disc and typing:

```
*CDIR S RETURN *DIR S RETURN
```

To make the game works from tape, enter the listings as they are and make the changes listed below.

Cheats, can make the following changes after which, resave the game. Now when you are asked to press Space (after the high score), pressing 'A' will start on screen A, 'B' on screen B and so on. The cheat mode allows you to start on any level.

See Enter the Nightmare World, page 88

Changes to listing 1 for use with tape

```

85 *OPT 1,1
4885 IF G%=1:GOTO 4890
4886 PRINT "Number of screens? (1-26)
";:INPUT "nrs%: IF nrs%<1 OR nrs%>26:GOTO
4886 ELSE ?%CFF=nrs%

```

Changes to listing 2 for use with tape

```

1 REM Delete lines 770, 810 and 2260
800 ch%=1
2181 COLOUR 1
2182 PRINT "Press <ESCAPE> to save."
2183 ON ERROR GOTO 2545
2184 COLOUR 3
2195 ON ERROR GOTO 2350

```

Changes to listing 3 for use with tape

```

30 ON ERROR GOTO 33
31 K%=0:IF S%=?%CFF OR S%=0:S%=0:G%=6
%-100:PROCo("FX13,5"):VDU22,1:COLOUR1:PR
INT "Rewind data tape and press <ESCAPE>
."':COLOUR3:PROCo(" ")
33 MODE2:PROCo("FX14,5"):CALL &165C:VD
U23;8202;0;0;0;ON ERROR GOTO 1100
34 PROCo
530 DEFPROCo:S%=S%+1
540 PROCo("LOAD S."+CHR$(S%+64)+" 900"
):CLS:PROCo:ENDPROC
1100 PROCo("FX15"):GOTO 170

```

Cheat mode changes to listing 3

```

10 S%=0:P%=&1400:Z%=&154E:Q%=&14E7:O%
=&1390:I%=0:I%="The Master":t%=0:ON ERRO
R GOTO 1100
20 G%=7000:F%=0:PROCo("FX13,5"):MODE2
:VDU23;8202;0;0;0;H%=3:CALL &165C:*FX14
,5
210 PROCo("FX15"):S%=GET-65:GOTO 20

```

Listing 1. The sprite display

```

10 REM Castle of Nightmares Listing 1
20 REM By Mark de Weger
30 REM BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 IF PAGE<>&1700 THEN PRINT "PAGE sh
ould be at &1700":END
70 *FX 13,5
80 MODE 6
90 IF (!&220 AND &FFFF)<&8000:GOTO 160
100 PROCsetup
110 PROCsprites
120 PROctune
130 PROCchars
140 PROCassemble
150 PROCchecksums
160 PROCinstr
170 END
180 :
190 DEF PROCsetup
200 DIM s(6)
210 sprites%=&1200
220 tune%=&1390
230 mc%=&1400
240 block1=&1680
250 block2=&1686
260 block3=&168C
270 p_block=&1692
280 block1!0=&9000B
290 block1!4=&8070A
300 block1!8=&A0709
310 block1!12=&9070B
320 block1!16=&A
330 p_block!1=0
340 ENVELOPE1,2,-1,1,-1,0,0,0,126,126,
-3,-3,80,80
350 ENVELOPE2,1,-10,20,-10,33,33,33,25
,-1,-1,-2,100,80
360 ENVELOPE3,1,0,0,0,0,0,0,127,-1,-1,
-1,100,70
370 ENVELOPE4,1,2,3,4,21,21,21,127,0,0
,-127,126,0
380 *FX 4,1
390 ENDPROC
400 :
410 DEF PROCassemble
420 FOR pass=0 TO 2 STEP 2

```

Continued ►

YELLOW PAGES

GAMES

◀ Castle of Nightmares listing 1 continued

430 P%=mc%	1160 :	1900 LDA #s(6) DIV 256	2640 :
440 [OPT pass	1170 .up1	1910 STA &B3	2650 .right
450 :	1180 JSR up	1920 LDA #B	2660 LDA &70
460 .entry	1190 .u_enter	1930 STA &B5	2670 CLC
470 PHA	1200 LDX #s(5) MOD 256	1940 JMP sprite2	2680 ADC #B
480 CMP #&F	1210 LDY #s(5) DIV 256	1950 :	2690 STA &70
490 BCC man	1220 LDA #3	1960 .sprite1	2700 BCC nh3
500 JMP missile	1230 STA &7A	1970 STX &72	2710 INC &71
510 .man	1240 JMP sprite1	1980 STX &82	2720 .nh3
520 JSR delete	1250 :	1990 STY &73	2730 JSR scr_addr
530 PLA	1260 .up2	2000 STY &83	2740 RTS
540 CMP #1	1270 JSR up	2010 LDA #4	2750 :
550 BEQ right1	1280 JMP right1	2020 STA &85	2760 .left
560 CMP #2	1290 :	2030 :	2770 LDA &70
570 BEQ right2	1300 .up3	2040 .sprite2	2780 SEC
580 CMP #3	1310 JSR up	2050 LDA &80	2790 SBC #B
590 BEQ left1	1320 JMP left1	2060 STA &86	2800 STA &70
600 CMP #4	1330 :	2070 LDA &81	2810 BCS nh4
610 BEQ left2	1340 .up4	2080 STA &87	2820 DEC &71
620 CMP #5	1350 JSR up	2090 LDY #0	2830 .nh4
630 BEQ up1	1360 JMP r_enter	2100 LDX &84	2840 JSR scr_addr
640 CMP #6	1370 :	2110 .loop	2850 RTS
650 BEQ up2	1380 .up5	2120 LDA (&82),Y	2860 :
660 CMP #7	1390 JSR up	2130 EOR (&86),Y	2870 .up
670 BEQ up3	1400 JMP l_enter	2140 STA (&86),Y	2880 LDX #2
680 CMP #8	1410 :	2150 INC &82	2890 .loop2
690 BEQ up4	1420 .down1	2160 BNE nh1	2900 LDA &70
700 CMP #9	1430 JSR down	2170 INC &83	2910 AND #7
710 BEQ up5	1440 JMP u_enter	2180 .nh1	2920 BEQ at_top
720 CMP #&A	1450 :	2190 LDA &86	2930 DEC &70
730 BEQ down1	1460 .down2	2200 AND #7	2940 .end_loop2
740 CMP #&B	1470 JSR down	2210 CMP #7	2950 DEX
750 BEQ down2	1480 JMP right1	2220 BNE one_down	2960 BNE loop2
760 CMP #&C	1490 :	2230 LDA &86	2970 JSR scr_addr
770 BEQ down3	1500 .down3	2240 ADC #&78	2980 RTS
780 CMP #&D	1510 JSR down	2250 STA &86	2990 .at_top
790 BEQ down4	1520 JMP left1	2260 LDA &87	3000 LDA &70
800 CMP #&E	1530 :	2270 ADC #2	3010 SEC
810 BEQ down5	1540 .down4	2280 STA &87	3020 SBC #&79
820 :	1550 JSR down	2290 JMP over	3030 STA &70
830 .right1	1560 JMP r_enter	2300 .one_down	3040 LDA &71
840 JSR right	1570 :	2310 INC &86	3050 SBC #2
850 .r_enter	1580 .down5	2320 .over	3060 STA &71
860 LDX #s(1) MOD 256	1590 JSR down	2330 DEX	3070 JMP end_loop2
870 LDY #s(1) DIV 256	1600 JMP l_enter	2340 BNE loop	3080 :
880 LDA #1	1610 :	2350 CLC	3090 .down
890 STA &7A	1620 .missile	2360 LDA &80	3100 LDX #2
900 JMP sprite1	1630 PLA	2370 ADC #B	3110 .loop3
910 :	1640 LDA #s(6) MOD 256	2380 STA &80	3120 LDA &70
920 .right2	1650 STA &82	2390 BCC nh2	3130 AND #7
930 JSR right	1660 LDA #s(6) DIV 256	2400 INC &81	3140 CMP #7
940 LDX #s(2) MOD 256	1670 STA &83	2410 .nh2	3150 BEQ at_bot
950 LDY #s(2) DIV 256	1680 LDA &76	2420 DEC &85	3160 INC &70
960 LDA #1	1690 STA &80	2430 BNE sprite2	3170 .end_loop3
970 STA &7A	1700 LDA &77	2440 RTS	3180 DEX
980 JMP sprite1	1710 STA &81	2450 :	3190 BNE loop3
990 :	1720 LDA #B	2460 .delete	3200 JSR scr_addr
1000 .left1	1730 STA &84	2470 JSR scr_addr	3210 RTS
1010 JSR left	1740 LDA #B	2480 LDA &72	3220 .at_bot
1020 .l_enter	1750 STA &85	2490 STA &82	3230 LDA &70
1030 LDX #s(3) MOD 256	1760 JSR sprite2	2500 LDA &73	3240 CLC
1040 LDY #s(3) DIV 256	1770 LDA &76	2510 STA &83	3250 ADC #&79
1050 LDA #2	1780 SEC	2520 LDA #16	3260 STA &70
1060 STA &7A	1790 SBC #16	2530 STA &84	3270 LDA &71
1070 JMP sprite1	1800 STA &76	2540 LDA #4	3280 ADC #2
1080 :	1810 BCS nh6	2550 STA &85	3290 STA &71
1090 .left2	1820 DEC &77	2560 JMP sprite2	3300 JMP end_loop3
1100 JSR left	1830 .nh6	2570 :	3310 :
1110 LDX #s(4) MOD 256	1840 LDA &76	2580 .scr_addr	3320 .right3
1120 LDY #s(4) DIV 256	1850 STA &80	2590 LDA &70	3330 JSR delete
1130 LDA #2	1860 LDA &77	2600 STA &80	3340 JSR right
1140 STA &7A	1870 STA &81	2610 LDA &71	3350 LDX &72
1150 JMP sprite1	1880 LDA #s(6) MOD 256	2620 STA &81	3360 LDY &73
	1890 STA &82	2630 RTS	

Continued ▶

YELLOW PAGES

GAMES

◀ Castle of Nightmares listing 1 continued

```

3370 LDA #1
3380 STA &7A
3390 JMP sprite1
3400 :
3410 .left3
3420 JSR delete
3430 JSR left
3440 LDX &72
3450 LDY &73
3460 LDA #2
3470 STA &7A
3480 JMP sprite1
3490 :
3500 .cols
3510 PHP
3520 CMP #5
3530 BNE out
3540 PHA
3550 TXA
3560 PHA
3570 TYA
3580 PHA
3590 JSR setup
3600 LDA &7C
3610 CMP #1
3620 BEQ 11
3630 CMP #2
3640 BEQ 12
3650 CMP #3
3660 BEQ 13
3670 :
3680 .11
3690 LDA #2
3700 STA &7C
3710 LDA #block1 MO
D 256
3720 STA &89
3730 LDA #block1 DI
V 256
3740 STA &8A
3750 JMP drop
3760 :
3770 .12
3780 LDA #3
3790 STA &7C
3800 LDA #block2 MO
D 256
3810 STA &89
3820 LDA #block2 DI
V 256
3830 STA &8A
3840 JMP drop
3850 :
3860 .13
3870 LDA #1
3880 STA &7C
3890 LDA #block3 MO
D 256
3900 STA &89
3910 LDA #block3 DI
V 256
3920 STA &8A
3930 :
3940 .drop
3950 LDY #&FF
3960 .me
3970 INY
3980 LDA (&89),Y
3990 STA p_block
4000 INY
4010 LDA (&89),Y
4020 STA p_block+1
4030 TYA
4040 PHA
4050 LDX #p_block M
OD 256
4060 LDY #p_block D
IV 256
4070 LDA #&C
4080 JSR &FFF1
4090 PLA
4100 TAY
4110 CPY #5
4120 BNE me
4130 :
4140 .aline
4150 PLA
4160 TAY
4170 PLA
4180 TAX
4190 PLA
4200 .out
4210 PLP
4220 RTS
4230 :
4240 .setup
4250 LDA #4
4260 LDX #clock MOD
256
4270 LDY #clock DIV
256
4280 JMP &FFF1
4290 :
4300 .clock
4310 J
4320 NEXT pass
4330 :
4340 ?&220=cols MOD
256
4350 ?&221=cols DIV
256
4360 ?&7C=1
4370 !clock=&FFFFFF
F6
4380 clock?4=&FF
4390 ENDPROC
4400 :
4410 DEF PROCsprite
s
4420 FOR loop%=0 TO
95
4430 READ A$
4440 sprites%!(loop
%*4)=EVAL("&"+A$)
4450 NEXT loop%
4460 FOR loop%=1 TO
6
4470 s(loop%)=sprit
es%+(loop%-1)*64
4480 NEXT loop%
4490 ENDPROC
4500 :
4510 DEF PROCtune
4520 FOR loop%=0 TO
89
4530 READ tune%?loo
p%
4540 NEXT loop%
4550 ENDPROC
4560 :
4570 DEF PROCchecks
ums
4580 PRINT "Calcula
ting checksums ...."

```

Continued ▶

◀ Castle of Nightmares listing 1 continued

```

4590 PROCcs(entry,delete-1,"assembler t
o label 'delete'",&8D48)
4600 PROCcs(delete,clock-1,"assembler f
rom label 'delete'",&7A47)
4610 PROCcs(sprites%,sprites%+383,"sprit
es data",&155B)
4620 PROCcs(tune%,tune%+89,"tune data",
&F1D)
4630 IF INKEY(-256)<>253 AND INKEY(-256)
<>245 THEN PROCcs(&C00,&CBF,"VDU 23 sta
tements",&26E2)
4640 PRINT "Checksums O.K."
4650 FOR loop%=1 TO 5000:NEXT loop%
4660 ENDPROC
4670 :
4680 DEF PROCcs(start%,finish%,text$,cs
%)
4690 sum%=0
4700 FOR loop%=start% TO finish%
4710 sum%=sum%+?loop%
4720 NEXT
4730 IF sum%<>cs%:PRINT "Checksum error
" "Please check ";text$:END
4740 ENDPROC
4750 :
4760 DEF PROCinstr
4770 CLS
4780 PRINT "CASTLE OF NIGHTMARES"
4790 PRINT "by Mark de Weger"
4800 PRINT "" Do you want to:"
4810 PRINT " 1. Create screens"
4820 PRINT " 2. Play the game"
4830 PRINT "" Enter option: "
4840 *FX15,1
4850 REPEAT
4860 G%=GET-48
4870 UNTIL G%=1 OR G%=2
4880 PRINT;G%
4890 IF G%=1 THEN CHAIN "NIGHTM2" ELSE
CHAIN "NIGHTM3"
4900 ENDPROC
4910 :
4920 DEF PROCchars
4930 VDU23,224,&FB00;&00FB;&DFO0;&00DF;
4940 VDU23,225,&FF00;0;0;&00FF;
4950 VDU23,226,0;&4281;&1824;0;
4960 VDU23,227,0;&6600;&0066;0;
4970 VDU23,228,&0080;0;0;0;
4980 VDU23,229,&0010;0;0;0;
4990 VDU23,230,&0002;0;0;0;
5000 VDU23,231,&4242;&4242;&4242;&4242;
5010 VDU23,232,&3C00;0;&3C00;0;
5020 VDU23,233,0;&2800;&7C7C;&387C;
5030 VDU23,234,&0402;&0008;0;0;
5040 VDU23,235,0;&1800;&0018;0;
5050 VDU23,236,0;&2418;&1824;0;
5060 VDU23,237,0;&9900;&DB99;&FF7E;
5070 VDU23,238,0;&0099;0;0;
5080 VDU23,239,&AA00;&5500;&AA00;0;
5090 VDU23,240,0;&0055;&00AA;&0055;
5100 VDU23,241,0;&00AA;&0055;&00AA;
5110 VDU23,242,&120C;&040C;&0C04;&1C04;
5120 VDU23,243,&00FF;0;0;&00FF;
5130 VDU23,244,&AA00;&AFFF;&AFFF;0;
5140 VDU23,245,&1020;&3442;&1441;&0102;
5150 VDU23,246,0;&8800;&2A54;&2084;
5160 VDU23,247,&FFFF;&FFFF;&FFFF;&FFFF;
5170 ENDPROC
5180 :
5190 REM Sprites data
5200 DATA 0,0,0
5210 DATA 0,111B1B05,14140011

```

Continued ▶

YELLOW PAGES

GAMES

◀ Castle of Nightmares listing 1 continued

```

5220 DATA 1111010,0,3332330F
5230 DATA 34203922,3033C34,F0B0203
5240 DATA 220000,0,2022B2B
5250 DATA 0,0,0
5260 DATA 0,0,111B1B05
5270 DATA 14140011,1011414,A0E0100
5280 DATA 3332330F,34203922,3133B30
5290 DATA 5040103,220000,0
5300 DATA 2022B2B,A000000,110000
5310 DATA 0,1011414,0
5320 DATA 3331330F,38103611,3033C3B
5330 DATA F040103,2227270A,2B280022
5340 DATA 2222020,0,0
5350 DATA 0,0,0
5360 DATA 110000,0,1011414
5370 DATA 5000000,3331330F,38103611
5380 DATA 3233430,A0B0203,2227270A
5390 DATA 2B280022,2022B2B,50D0200
5400 DATA 0,0,0
5410 DATA 0,0,0
5420 DATA 0,0,11270F05
5430 DATA 3C140011,1033C3C,5040101
5440 DATA 330F0F0F,3C3C2B33,3033C3C
5450 DATA 5040101,220A00,28000000
5460 DATA 22B2B,0,3C140000
5470 DATA 14,3B2C3800,3B2C
5480 DATA 1B241800,1B24,39343900
5490 DATA 3934,33333300,3333
5500 DATA 30003000,3000,F0B0302
5510 DATA 2030B,3020000,2
5520 :
5530 REM Tune data
5540 DATA 81,4,81,4,89,4,89,4,81,8
5550 DATA 69,8,81,4,81,4,89,4,89,4
5560 DATA 81,8,69,8,81,4,81,4,89,4
5570 DATA 97,4,101,8,109,8,97,8,89,2
5580 DATA 97,4,89,2,81,8,89,4,97,4
5590 DATA 101,8,97,4,89,4,81,16,89,8
5600 DATA 81,4,73,4,69,12,73,4,81,4
5610 DATA 81,4,53,4,73,4,69,8,61,8
5620 DATA 53,16,53,4,53,4,53,4,53,4

```

Listing 2. The screen designer program

```

10 REM Castle of Nightmares Listing 2
20 REM By Mark de Weger
30 REM BBC B/B+/M/C/E
40 REM (c) Acorn User December 1986
50 :
60 *FX 13,5
70 MODE 1
80 ON ERROR GOTO 2000
90 PROCstart
100 MODE 2
110 CALL &165C
120 *FX 14,5
130 PROCsetup
140 IF yn$<>"N":PROCscreen ELSE $AE1=
""
150 PROCcreate
160 END
170 :
180 DEF PROCset(x%,y%,nr%)
190 VDU 5
200 MOVE x%*64,1024-y%*32
210 GCOL 0,0
220 VDU 247,8
230 ON nr%+1 GOSUB 270,290,300,330,410
,490,530,560,590,620,650
240 VDU 4
250 ENDPROC

```

Continued ▶

◀ Castle of Nightmares listing 2 continued

```

260 :
270 RETURN
280 :
290 GCOL 3,1:VDU 224:RETURN
300 GCOL 3,4:VDU 225,8:GCOL 3,3
310 VDU 226:RETURN
320 :
330 GCOL 3,6:VDU 225,8:GCOL 3,4
340 VDU 227,8:GCOL 3,8:VDU 228,8
350 GCOL 3,9:VDU 229,8:GCOL 3,10
360 VDU 230,8:PLOT 0,0,-28
370 GCOL 3,10:VDU 228,8:GCOL 3,9
380 VDU 229,8:GCOL 3,8:VDU 230
390 RETURN
400 :
410 GCOL 3,6:VDU 225,8:GCOL 3,4
420 VDU 227,8:GCOL 3,10:VDU 228,8
430 GCOL 3,9:VDU 229,8:GCOL 3,8
440 VDU 230,8:PLOT 0,0,-28
450 GCOL 3,8:VDU 228,8:GCOL 3,9
460 VDU 229,8:GCOL 3,10:VDU 230,8
470 RETURN
480 :
490 GCOL 3,8:VDU 239,8:GCOL 3,9
500 VDU 240,8:GCOL 3,10:VDU 241
510 RETURN
520 :
530 GCOL 3,7:VDU 231,8:GCOL 3,6
540 VDU 232:RETURN
550 :
560 GCOL 3,5:VDU 233,8:GCOL 3,2
570 VDU 234:RETURN
580 :
590 GCOL 3,4:VDU 235,8:GCOL 3,3
600 VDU 236:RETURN
610 :
620 GCOL 3,1:VDU 237,8:GCOL 3,12
630 VDU 238:RETURN
640 :
650 GCOL 3,2:VDU 242:RETURN
660 :
670 DEF PROCsetup
680 FOR loop%=0 TO 9
690 PROCset(loop%*2,1,loop%+1)
700 PRINT TAB(loop%*2,2);loop%
710 NEXT
720 ENDPROC
730 :
740 DEF PROCstart
750 yn$=FNyn("Load screen from tape/di
sc? (Y/N) ")
760 IF yn$="N":FOR loop%=&900 TO &AFC
STEP 4:loop%=0:NEXT:ENDPROC
770 *CAT
780 REPEAT
790 fn$=FNfilename
800 ch%=OPENUP("S."+fn$)
810 CLOSE #0
820 IF ch%=0:VDU 7
830 UNTIL ch%
840 PROCoscli("LOAD S."+fn$+" 900")
850 ENDPROC
860 :
870 DEF PROCpoke(x%,y%,nr%)
880 ?(&900+x%+(y%-5)*20)=nr%
890 ENDPROC
900 :
910 DEF PROCscreen
920 PRINT TAB(0,0);
930 FOR y%=5 TO 28
940 FOR x%=0 TO 20
950 PROCset(x%,y%,?(&900+x%+(y%-5)*20)
)
960 NEXT

```

Continued ▶

YELLOW PAGES

GAMES

◀ Castle of Nightmares listing 2 continued

```

970 NEXT
980 ENDPROC
990 :
1000 DEF PROCcreate
1010 PROCset(0,28,1)
1020 PROCset(0,5,2)
1030 PROCset(1,5,2)
1040 PROCpoke(0,28,1)
1050 PROCpoke(0,5,2)
1060 PROCpoke(1,5,2)
1070 FOR y%=4 TO 25 STEP 3
1080 ?&84=8
1090 !&76=&3240+y%*&280
1100 CALL &14E7
1110 VDU 5
1120 MOVE 1176,1030-(y%+1)*32
1130 GCOL 0,7
1140 VDU 243,8
1150 GCOL 0,3
1160 VDU 244
1170 NEXT
1180 VDU 4
1190 FOR x%=0 TO 2
1200 !&70=&7880+x%*32
1210 !&72=&1200
1220 CALL &154E
1230 NEXT x%
1240 PROCbox(56,864,115,936,2)
1250 PROCbox(74,910,102,930,0)
1260 PLOT 69,98,896
1270 PROC3d(8,30,2,3,$&AE1)
1280 prev%=-15
1290 nx%=1
1300 ny%=28
1310 REPEAT
1320 PRINT TAB(nx%,ny%);
1330 key%=GET$
1340 IF ASC(key%)=13:key%=CHR$(prev%+47)
)
1350 IF key%>="0" AND key%<="9":prev%=V
AL(key%)+1:PROCset(nx%,ny%,prev%):PROCpo
ke(nx%,ny%,prev%):UNTIL 0
1360 IF key%=" ":PROCset(nx%,ny%,0):PRO
Cpoke(nx%,ny%,0):prev%=-15
1370 ox%=nx%+(key%="Z")-(key%="X")
1380 oy%=ny%+(key%=":")-(key%="/")
1390 IF ox%<0 OR ox%>16 OR oy%<5 OR oy%
>28 OR (ox%=0 AND oy%=28) OR (ox%<2 AND
oy%=5):UNTIL 0
1400 nx%=ox%
1410 ny%=oy%
1420 UNTIL 0
1430 :
1440 DEF PROCoscli($&BA0)
1450 X%=&A0
1460 Y%=&B
1470 CALL &FFF7
1480 ENDPROC
1490 :
1500 DEF PROCbox(a%,b%,c%,d%,nr%)
1510 VDU 24,a%;b%;c%;d%;
1520 GCOL 0,128+nr%
1530 CLG
1540 GCOL 0,7
1550 GCOL 0,128
1560 MOVE a%,b%
1570 DRAW a%,d%
1580 DRAW c%,d%
1590 DRAW c%,b%
1600 IF nr%<>2:DRAW a%,b%
1610 VDU 26
1620 ENDPROC
1630 :

```

Continued ▶

◀ Castle of Nightmares listing 2 continued

```

1640 DEF PROC3d(x%,y%,c1%,c2%,text$)
1650 VDU 5
1660 MOVE x%*64,1024-y%*32
1670 GCOL 0,c1%
1680 PRINT text$
1690 MOVE x%*64-4,1022-y%*32-2
1700 GCOL 0,c2%
1710 PRINT text$
1720 VDU 4
1730 ENDPROC
1740 :
1750 DEF FNyn(text$)
1760 COLOUR 1
1770 PRINT text$;
1780 COLOUR 2
1790 *FX 15,1
1800 REPEAT
1810 yn%=GET$
1820 UNTIL INSTR("YN",yn%)
1830 PRINT yn%
1840 COLOUR 3
1850 =yn%
1860 :
1870 DEF FNfilename
1880 COLOUR 1
1890 PRINT "Enter filename: ";
1900 COLOUR 2
1910 PRINT "S.";
1920 REPEAT
1930 fn%=GET$
1940 UNTIL fn%>="A" AND fn%<="Z"
1950 PRINT fn%
1960 COLOUR 3
1970 =fn%
1980 :
1990 REM Error trapping routine
2000 *FX 13,5
2010 MODE 1
2020 IF ERR<>17:PRINT:REPORT:PRINT
2030 yn%=FNyn("Save screen to tape/disc
? (Y/N) ")
2040 IF yn%="N":GOTO 2220
2050 COLOUR 1
2060 PRINT "Old title: ";
2070 COLOUR 2
2080 PRINT $&AE1
2090 COLOUR 1
2100 REPEAT
2110 PRINT "Enter new title (<RETURN>: s
ame) "
2120 COLOUR 2
2130 INPUT "title$
2140 IF LEN(title$)>10:VDU7
2150 UNTIL LEN(title$)<=10
2160 IF title$<>"":$&AE1=title$
2170 COLOUR 3
2180 CLS
2190 *CAT
2200 fn%=FNfilename
2210 PROCoscli("SAVE S."+fn%+" 900 +1FF
")
2220 yn%=FNyn("Create/edit another scre
en? (Y/N) ")
2230 IF yn%="Y":RUN
2240 *FX 13,5
2250 MODE 6
2260 CHAIN "NIGHTM1"

```


YELLOW PAGES

GAMES

Listing 3. The Castle of Nightmares game

```

1 REM Castle of Nightmares Listing 3
2 REM by Mark de Weger
3 REM for BBC B/B+/M/C/E
4 REM (c) Acorn User December 1986
5 :
6 REM Don't type in lines 1 to 7!
7 :
10 P%=&1400:Z%=&154E:Q%=&14E7:D%=&1390
:I%=0:I$="The Master":t%=0:ON ERROR GOTO1
100
20 S%=0:G%=7000:F%=0:PROCc("FX13,5"):M
ODE2:VDU23;8202;0;0;0;H%=3:CALL &165C:*F
X14,5
30 K%=0:PROCe
40 J%=0:B%=0:T%=-2:C%=0:D%=0:!*70=&710
0:!*72=&1200:CALL Z%:!*76=&6940:?!84=8:M%
=40:N%=7
50 REPEAT
60 IF INKEY-74:PROCj:GOTO120
70 IF INKEY-98:PROCl:GOTO120
80 IF INKEY-67:PROCr:GOTO120
90 IF INKEY-73:PROCu:GOTO120
100 IF INKEY-105:PROCd:GOTO120
110 IF INKEY-106:PROCg
120 PROCc(C%,D%):PROCm:UNTIL B% OR J%
130 PROCc("FX15"):IF B%:GOTO150
140 F%=F%+100+R%*10:PROCp(1000):SOUND0,
-10,4,50:FOR L%=1 TO 33:PRINTTAB(0,31):PR
OCp(100):NEXT:CLS:GOTO30
150 PROCp(1000):H%=H%-1:IF H%=-1:GOTO 1
70
160 FOR L%=32 TO 0 STEP -1:PRINTTAB(0,3
2-L%):SPC(20):SOUND1,-15,L%*3,1:PROCp(30)
:NEXT:CLS:PROCc:GOTO40
170 IF F%<I%:GOTO190 ELSE PROCb(256,30
0,1040,724,0):I%=F%:PROCv(6,11,4,3,"Hi-sc
ore!"):PROCv(5,13,2,1,"Enter name:"):VDU2
8,5,15,15,15
180 INPUT"I$":IF LEN(I$)>10:VDU7:CLS:GO
TO180
190 VDU26:PROCb(256,300,1040,724,0):PRO
Cv(6,11,4,2,"Hi-score:")
200 PRINTTAB(7,13):STRING$(6-LEN(STR$(I
%)), "0");I$:TAB(5,17):SPC((10-LEN(I$))/2)
:I$:PROCv(9,15,3,1,"by"):PROCv(5,20,3,5,"
Press SPACE")
210 PROCc("FX15"):REPEAT:UNTIL GET=32:G
OTO20
220 DEFPROC1:IF C%=0 OR D%/2<>INT(D%/2)
:ENDPROC ELSE C%=C%-1:IF ADVAL-5=15:SOUN
D0,-11,2,1
230 A%=4:CALL P%:PROCm:A%=3:CALL P%:END
PROC
240 DEFPROC2:IF C%=32 OR D%/2<>INT(D%/2)
:ENDPROC ELSE C%=C%+1:IF ADVAL-5=15:SOUN
D0,-11,2,1
250 A%=2:CALL P%:PROCm:A%=1:CALL P%:END
PROC
260 DEFPROC3:IF D%=46 OR NOT(FNW(C%,D%+
2)=6 OR FNW(C%,D%+1)=6):ENDPROC ELSE D%=D
%+1:IF ADVAL-5=15:SOUND0,-11,2,1
270 A%=5:CALL P%:PROCm:A%=5:CALL P%:END
PROC
280 DEFPROC4:IF D%=0 OR NOT(FNW(C%,D%)=
6 OR FNW(C%,D%+1)=6):ENDPROC ELSE D%=D%-1
:IF ADVAL-5=15:SOUND0,-11,2,1
290 A%=10:CALL P%:PROCm:A%=10:CALL P%:E
NDPROC
300 DEFPROCp(A%):FOR x=1 TO A%:NEXT:END
PROC

```

Continued ►

◀ Castle of Nightmare listing 3 continued

```

310 DEFPROCj:IF NOT INKEY-67 OR C%>30:G
OTO350 ELSE IF D%/2<>INT(D%/2):ENDPROC
320 IF ADVAL-5=15:SOUND0,-11,2,1
330 FOR L%=1 TO 2:A%=6:CALL P%:A%=6:CAL
L P%:C%=C%+1:D%=D%+1:PROCm:NEXT:IF C%=32:
ENDPROC ELSE A%=FNW(C%,D%):IF A%>0 AND A%
<7:ENDPROC
340 C%=C%+1:A%=1:CALL P%:A%=1:CALL P%:P
ROCm:A%=FNW(C%,D%):IF C%>30 OR (A%>0AND A
%<7):ENDPROC ELSE FOR L%=1 TO 2:A%=11:CAL
L P%:A%=11:CALL P%:C%=C%+1:D%=D%-1:PROCm:
NEXT:ENDPROC
350 IF NOT INKEY-98 OR C%<2:GOTO390 ELSE
IF D%/2<>INT(D%/2):ENDPROC
360 IF ADVAL-5=15:SOUND0,-11,2,1
370 FOR L%=1 TO 2:A%=7:CALL P%:A%=7:CAL
L P%:C%=C%-1:D%=D%+1:PROCm:NEXT:IF C%=0:E
NDPROC ELSE A%=FNW(C%,D%):IF A%>0 AND A%<
7:ENDPROC
380 C%=C%-1:A%=3:CALL P%:A%=3:CALL P%:P
ROCm:A%=FNW(C%,D%):IF C%<2 OR (A%>0AND A%
<7):ENDPROC ELSE FOR L%=1 TO 2:A%=12:CAL
L P%:A%=12:CALL P%:C%=C%-1:D%=D%-1:PROCm:N
EXT:ENDPROC
390 A%=?&7A:IF A%=1:V%=8:W%=13:GOTO 410
:ELSE IF A%=2:V%=9:W%=14:GOTO410
400 V%=5:W%=10
410 IF ADVAL-5=15:SOUND0,-11,2,1
420 FOR L%=1 TO 2:A%=V%:CALL P%:A%=V%:C
ALL P%:D%=D%+1:PROCm:NEXT:A%=FNW(C%,D%):X
%=FNW(C%-1,D%):Y%=FNW(C%+1,D%):IF (A%>0 A
ND A%<7) OR (X%>0 AND X%<6) OR (Y%>0 AND
Y%<6):ENDPROC
430 FOR L%=1 TO 2:A%=W%:CALL P%:A%=W%:C
ALL P%:D%=D%-1:PROCm:NEXT:ENDPROC
440 DEFPROCm:PROCh:IF ADVAL-6<5 OR t%:G
OTO460 ELSE T%=T%+2:IF T%=90:T%=0
450 SOUND1,1,T%*0%,0%?(T%+1):SOUND3,1,T
%*0%,0%?(T%+1)
460 IF M%>6:GOTO510 ELSE M%=M%-1:IF M%=
5:?!84=8:CALL Q%:?!76=&3240+(29-N%)*&280:
?!84=8:CALL Q%:ENDPROC
470 IF M%<>4:GOTO 500
480 y%=29-((INT(D%/6)+RND(3)-2)*3+1):IF
y%<4:y%=4 ELSE IF y%>25:y%=25
490 N%=29-y%:!*76=&3240+y%*&280:ENDPROC
500 IF M%=2 OR M%=3:?!84=8:CALL Q%:ENDP
ROC ELSE IF M%=1:M%=41:ENDPROC
510 M%=M%-1:A%=15:CALL P%:IF D%-N%*2<-2
:IF D%-N%*2>-8:IF M%-C%<7:IF M%-C%>4:PROC
k(1)
520 ENDPROC
530 DEFPROCe:S%=S%+1:A%=OPENUP("S."+CHR
$(S%+64)):CLOSE#0:IF A%=0:S%=1:G%=G%-1000
540 PROCc("LOAD S."+CHR$(S%+64)+" 900")
:PROCc:ENDPROC
550 DEFPROCc(x%,y%,w%):VDU5:MOVE x%*64,
1024-y%*32:ON W%+1 GOSUB 570,580,590,600,
610,620,630,640,650,660,670
560 VDU4:ENDPROC
570 RETURN
580 GCOL3,1:VDU224:RETURN
590 GCOL3,4:VDU225,8:GCOL3,3:VDU226:RET
URN
600 GCOL3,6:VDU225,8:GCOL3,4:VDU227,8:G
COL3,8:VDU228,8:GCOL3,9:VDU229,8:GCOL3,10
:VDU230,8:PLOT0,0,-28:GCOL3,10:VDU228,8:G
COL3,9:VDU229,8:GCOL3,8:VDU230:RETURN

```

Continued ►

YELLOW PAGES

GAMES

◀ Castle of Nightmares listing 3 continued

```

610 GCOL3,6:VDU225,8:GCOL3,4:VDU227,8:G
COL3,10:VDU228,8:GCOL3,9:VDU229,8:GCOL3,8
:VDU230,8:PLOT0,0,-28:GCOL3,8:VDU228,8:GCOL
3,9:VDU229,8:GCOL3,10:VDU230,8:RETURN
620 GCOL3,8:VDU239,8:GCOL3,9:VDU240,8:G
COL3,10:VDU241:RETURN
630 GCOL3,7:VDU231,8:GCOL3,6:VDU232:RET
URN
640 GCOL3,5:VDU233,8:GCOL3,2:VDU234:RET
URN
650 GCOL3,4:VDU235,8:GCOL3,3:VDU236:RET
URN
660 GCOL3,1:VDU237,8:GCOL3,12:VDU238:RE
TURN
670 GCOL3,2:VDU242:RETURN
680 DEFPROCc(x%,y%,W%):?(&900+x%+(y%-5)
*20)=W%:ENDPROC
690 DEFPROCc:PRINTTAB(0,0):FOR y%=5 TO
28:FOR x%=0 TO 20:PROCc(x%,y%,?(&900+x%+
(y%-5)*20)):NEXT:NEXT
700 FOR y%=4 TO 25 STEP 3:?&84=8:!!&76=&
3240+y%*&280:CALL &14E7:VDU5:MOVE 1176,10
30-(y%+1)*32:GCOL0,7:VDU243,8:GCOL0,3:VDU
244:NEXT:VDU4
710 IF H%<>0:FOR x%=0 TO H%-1:!!&70=&788
0+x%*32:!!&72=&1200:CALL &154E:NEXT
720 PROCb(56,864,115,936,2):PROCb(74,91
0,102,930,0):PLOT69,98,896:PROCv(8,30,2,3
,!!&AE1):PROCv(0,1,4,5,"SCORE"):PROCv(13,
1,4,5,"TIME"):IF K%>3:K%=3
730 IF K%<>0:FOR L%=1 TO K%:COLOUR2:PRI
NTTAB(3+L%,30):CHR$242:COLOUR7:NEXT
740 TIME=0:PROCn:ENDPROC
750 DEFPROCc(%&BA0):X%=&A0:Y%=&B0:CALL &
FFF7:ENDPROC
760 DEFPROCc(U%,V%,X%,Y%,W%):VDU24,U%:V
%:X%:Y%:GCOL0,128+W%:CLG:GCOL0,7:GCOL0,1
28:MOVE U%,V%:DRAW U%,Y%:DRAW X%,Y%:DRAW
X%,V%:IF W%<>2:DRAW U%,V%
770 VDU26:ENDPROC
780 DEFPROCc(x%,y%,X%,Y%,t%):VDU5:MOVE
x%*64,1024-y%*32:GCOL0,X%:PRINTt%:MOVE x%
*64-4,1022-y%*32-2:GCOL0,Y%:PRINTt%:VDU4:
ENDPROC
790 DEFPROCc:R%=(G%-TIME)/100:PRINTTAB(
6,1):STRING$(6-LEN(STR$(F%)),"0"):F%:TAB(
18,1):STRING$(2-LEN(STR$(R%)),"0"):R%:END
PROC
800 DEFFNW(x%,y%):x=x%*.5:y=28-y%*.5:IF
x<>INT(x):=-1 ELSE IF y<5:=0
810 IF y%*.5<INT(y%*.5):=-2 ELSE IF ?(&9
00+x%+(y-5)*20)
820 DEFPROCc(x%,y%):IF C%<4:IF D%>45:IF
K%>2:J%=-1:ENDPROC
830 IF TIME>6%:TIME=G%-99:PROCn:PROCK(2
):ENDPROC ELSE E%=FNW(x%,y%+2):IF E%=7:F%
=F%+50:PROCa(x,y,0):PROCc(x,y,7):SOUND0,3
,10,10
840 IF E%=8:TIME=0:PROCa(x,y,0):PROCc(x
,y,8):SOUND&0002,4,25,10 ELSE IF E%=9:PRO
CK(2):ENDPROC
850 IF E%=10:PROCf
860 E%=FNW(x%,y%)
870 IF E%=1 OR E%=2 OR E%=6:ENDPROC ELS
E IF E%=0 OR E%>6:PROCT:ENDPROC
880 IF E%=-2:ENDPROC
890 IF E%=4:IF C%<>32:CALL &15CF:CALL &
15CF:C%=C%+1 ELSE IF E%=3:IF C%<>0:CALL &
15E0:CALL &15E0:C%=C%-1
900 IF E%=5:SOUND&0002,1,200,5:PROCa(x
,y,0):PROCc(x,y,5):F%=F%+10

```

Continued ▶

◀ Castle of Nightmares listing 3 continued

```

910 E%=FNW(x%+1,y%)
920 IF E%<>3 AND E%<>4:E%=FNW(x%-1,y%):
IF E%<>3 AND E%<>4 AND E%<>0 AND E%<>7:END
PROC ELSE IF E%=4:IF C%<>32:CALL &15CF:CA
LL &15CF:C%=C%+1
930 IF E%=3:IF C%<>0:CALL &15E0:CALL &1
5E0:C%=C%-1 ELSE IF E%=0 OR E%>6:E%=FNW(x
%+1,y%):IF E%=0 OR E%>6:PROCT
940 ENDPROC
950 DEFPROCf:K%=K%+1:IF K%<4:COLOUR2:PR
INTTAB(3+K%,30):CHR$242:COLOUR7:F%=F%+10
0:SOUND2,2,200,1
960 PROCa(x,y,0):PROCc(x,y,10):ENDPROC
970 DEFPROCt:A%=?&7A:IF A%=1:V%=13:GOTO
990 ELSE IF A%=2:V%=14:GOTO990
980 V%=10
990 U%=D%:REPEAT:FOR L%=1 TO 2:D%=D%-1:
A%=V%:CALL P%:PROCm:A%=V%:CALL P%:NEXT:A%
=FNW(C%,D%):UNTIL A%>0 OR (A%=-1 AND (FNW
(C%-1,D%)>0 OR FNW(C%+1,D%)>0)) OR D%<0
1000 IF U%-D%>4:PROCK(3) ELSE IF D%<0:PR
OCK(2)
1010 ENDPROC
1020 DEFPROCK(U%):PROCc("FX15"):IF B%=-1
:ENDPROC ELSE B%=-1
1030 IF U%=1:SOUND&10,3,6,1:VDU5:FOR U%=
1 TO 15:GCOL0,RND(7):MOVE C%*32+(RND(3)-
2)*RND(75))-12,D%*16+RND(50)+150:VDU245,2
46:NEXT:VDU4:GCOL0,7:ENDPROC
1040 IF U%=3:SOUND&10,3,100,1:PRINTTAB(0
,0):CHR$11:PROCp(1000):PRINTTAB(0,31):EN
DPROC
1050 IF U%=2:FOR U%=1 TO 20:SOUND&03,1,(
U% MOD 2)*50+100,1:A%=1:CALL P%:PROCp(10)
:A%=3:CALL P%:PROCp(10):NEXT:PROCc("FX15"
):SOUND0,-15,6,2:CALL Z%:PROCp(500):ENDPR
OC
1060 DEFPROCg:U%=TIME:PROCc("FX15"):REPE
AT:IF INKEY-17:*FX210,1
1070 IF INKEY-82:*FX210
1080 IF INKEY-36:t%=0 ELSE IF INKEY-55:t
%=1
1090 UNTIL INKEY-90:TIME=U%:ENDPROC
1100 PROCc("FX15"):CLOSE#0:IF INKEY-2:PR
OCc("FX13,5"):MODE6:CHAIN"NIGHTM1" ELSE 1
70

```

Listing 4. Sets up three games screens

```

10 REM Castle of Nightmares Listing 4
20 REM By David Lawrence
30 REM For BBC B/B+/M/C/E
40 REM (C) Acorn User December 1986
50 :
60 MODE 6
...
80 screen%=65:DIM os 100
90 REPEAT
100 FOR I%=&900 TO &AFC STEP 4
110 !I%=0:NEXT
120 addr%=&900
130 READ name$:$&AE1=name$
140 PRINT"Creating ":"name$
150 REPEAT
160 READ A$
170 IF A%<>"*" PROCpoke(A$)
180 UNTIL A%="*"
190 READ check

```

Continued ▶

YELLOW PAGES

GAMES

◀ Castle of Nightmares listing 4 continued

```

200 TX=0:FOR IX=&900 TO &AFF
210 TX=TX+?IX:NEXT
220 IF TX<>check PRINT"Please check da
ta for 'name$;'.":VDU7:END
230 PROCoscli("SAVE S."+CHR$(screen%)
+" 900+1FF")
240 screen%=screen%+1:UNTIL screen%=68
250 PRINT"Screens completed.":VDU 7
260 END
270 :
280 DEF PROCpoke(S%)
290 REPEAT
300 B%=LEFT$(S%,1)
310 IF B%<"A" ?addr%=ASC(B%)-47:addr%=
addr%+1
320 IF B%="A" FOR MX=0 TO ASC(B%)-65:
MX?addr%=0:NEXT:addr%=addr%+MX
330 S%=MID$(S%,2):UNTILS%=""
340 ENDPROC
350 :
360 DEF PROCoscli(os%)
370 %os=os%
380 X%=%os MOD 256:Y%=%os DIV 256
390 CALL &FFF7
400 ENDPROC
410 :
420 DATA THE ENTRY
430 DATA 11111151111111A6J5F0005I5I5I5
440 DATA D9D5C454440005221BBA5D5F5B115
450 DATA 111D5F5D5F95B6C5D5F11B151A1D5
460 DATA 6J5B115I5I5B6A5D6D5E50000B40
470 DATA 05B59D5J53344D5J5H5J5H5J5H5J5
480 DATA H1153333B1115H5J5H5J5H5J5H5E
490 DATA 8D5A6C00004440000444000D
500 DATA *,1247
510 DATA FAIRY LAIR
520 DATA 11115I66665H5111F65C7D5H54111
530 DATA 4441A95H5B1111445E5B6J5E00000
540 DATA 09B5J00F00K00B8A00M005000P5S5
550 DATA K6ABE5H5221111222213333C505C
560 DATA 505C505C5619B6A5C114411514411
570 DATA 11115I5I5I5I5I5I5B6A5D8A6B5C0
580 DATA 0000000B0000000D
590 DATA *,1251
600 DATA DEATH ROOM
610 DATA 1115A6A5D66566F51115D11511F5C
620 DATA 5F5H5C5F5H5C59C7A5H5B511B0005
630 DATA H5B5G5A9F5B5G544D6A5B5G5F5111
640 DATA 55B5F5C55B5F5C5112222525F5C5F
650 DATA 5H5C5F5H5A6A5F5H51115A6B8A5H5
660 DATA C5514411115F5C55B5F5C55B5F5C5
670 DATA 5B533D5C55B5F5C55B5F5B655B8A6
680 DATA 9A5E0000000000000000D
690 DATA *,1433

```

See DIY Windows, page 95

Listing 1. Assembles main Windows code

```

10 REM Windows - Listing 1
20 REM by David Lawrence
30 REM for BBC B/B+/M/C/E
40 REM (C) Acorn User December 1986
50 :
60 MODE 6
70 PROCvars
80 PROCassemble
90 PROCchecksum
100 PROCsave
110 END
120 :
130 DEF PROCvars
140 left=&70:bottom=&71:right=&72
150 top=&73:coords=&70:width=&74 Continued ▶

```

◀ Windows listing 1 continued

```

160 rom=&75:count=&76:left1=&77
170 coords2=&77:slot=&7B:flag=&7F
180 point1lo=&80:point1hi=&81
190 point1=&80:point2lo=&82
200 point2hi=&83:swrlo=&84:swrmem=&84
210 swrhi=&85:copylo=&86:copyhi=&87
220 fore=&88:back=&89:temp1=&8E
230 temp2=&8F:latch=&FE30:RAMcopy=&F4
240 wind=&302:text1=&308:texttt=&30B
250 Xpos=&318:Ypos=&319:byteschar=&34F
260 TLHClo=&350:TLHChi=&351
270 bytesrowlo=&352:bytesrowhi=&353
280 forecol=&357:backcol=&358
290 oswrch=&FFEE
300 ENDPROC
310 :
320 DEF PROCassemble
330 FOR pass=0 TO 3 STEP 3

```

```

340 P%=&900
350 LOPT pass
360 .close
370 LDA RAMcopy
380 STA rom
390 LDA slot
400 STA latch
410 STA RAMcopy
420 LDA swrlo
430 SEC
440 SBC #14
450 STA swrlo
460 LDA swrhi
470 SBC #0
480 STA swrhi
490 LDY #0
500 .aloop
510 LDA (swrmem),Y
520 STA coords,Y
530 INY
540 CPY #4
550 BNE aloop
560 LDA (swrmem),Y
570 STA temp1
580 INY
590 LDA (swrmem),Y
600 STA temp2
610 INY
620 LDA #28
630 JSR oswrch
640 .nloop
650 LDA (swrmem),Y
660 JSR oswrch
670 INY
680 CPY #10
690 BNE nloop
700 LDA #31
710 JSR oswrch
720 LDA (swrmem),Y
730 SEC
740 SBC text1
750 JSR oswrch
760 INY
770 LDA (swrmem),Y
780 SEC
790 SBC texttt
800 JSR oswrch
810 INY
820 LDY #0
830 .coloop1
840 LDA #17
850 JSR oswrch
860 TXA
870 JSR oswrch
880 INX
890 LDA forecol
900 CMP (swrmem),Y
910 BNE coloop1
920 INY
930 LDX #128
940 .coloop2
950 LDA #17
960 JSR oswrch
970 TXA
980 JSR oswrch
990 INX
1000 LDA backcol
1010 CMP (swrmem),Y
1020 BNE coloop2
1030 LDA temp1
1040 STA swrlo
1050 STA copylo
1060 LDA temp2
1070 STA swrhi
1080 STA copyhi
1090 LDA #0
1100 STA flag
1110 JMP go
1120 \
1130 .open
1140 LDA RAMcopy
1150 STA rom
1160 LDA slot
1170 STA latch
1180 STA RAMcopy
1190 LDY #0
1200 .sloop
1210 LDA coords,Y
1220 STA coords2,Y
1230 INY
1240 CPY #4
1250 BNE sloop
1260 LDA #1
1270 STA flag
1280 \
1290 .go
1300 LDA right
1310 SEC
1320 SBC left
1330 STA width
1340 INC width
1350 INC bottom
1360 INC right

```

Continued ▶

YELLOW PAGES

UTILITIES

◀ Windows listing 1 continued

```

1370 LDA TLHClo
1380 STA point1lo
1390 LDA TLHChi
1400 STA point1hi
1410 LDY top
1420 CPY #0
1430 BEQ next1
1440 .loop1
1450 LDA point1lo
1460 CLC
1470 ADC bytesrowlo
1480 STA point1lo
1490 LDA point1hi
1500 ADC bytesrowhi
1510 STA point1hi
1520 DEY
1530 BNE loop1
1540 .next1
1550 LDY left
1560 CPY #0
1570 BEQ next2
1580 .loop2
1590 LDA point1lo
1600 CLC
1610 ADC byteschar
1620 STA point1lo
1630 LDA point1hi
1640 ADC #0
1650 STA point1hi
1660 DEY
1670 BNE loop2
1680 .next2
1690 LDA point1lo
1700 STA point2lo
1710 LDA point1hi
1720 STA point2hi
1730 LDA swrlo
1740 STA copylo
1750 LDA swrhi
1760 STA copyhi
1770 LDY #0
1780 .yloop
1790 LDA left
1800 STA count
1810 .xloop
1820 LDX byteschar
1830 .cloop
1840 LDA flag
1850 BEQ get
1860 LDA (point1),Y
1870 STA (swrmem),Y
1880 JMP cont
1890 .get
1900 LDA (swrmem),Y
1910 STA (point1),Y
1920 .cont
1930 LDA point1lo
1940 CLC
1950 ADC #1
1960 STA point1lo
1970 LDA point1hi
1980 ADC #0
1990 STA point1hi
2000 LDA swrlo
2010 CLC
2020 ADC #1
2030 STA swrlo
2040 LDA swrhi
2050 ADC #0
2060 STA swrhi
2070 DEX
2080 BNE cloop
2090 INC count
2100 LDA count
2110 CMP right
2120 BNE xloop
2130 LDA point2lo
2140 CLC
2150 ADC bytesrowlo
2160 STA point2lo
2170 STA point1lo
2180 LDA point2hi
2190 ADC bytesrowhi
2200 STA point2hi
2210 STA point1hi
2220 INC top
2230 LDA top
2240 CMP bottom
2250 BNE yloop
2260 LDA flag
2270 BEQ endc
2280 LDY #0
2290 .bloop
2300 LDA coords2,Y
2310 STA (swrmem),Y
2320 INY
2330 CPY #4
2340 BNE bloop
2350 LDA copylo
2360 STA (swrmem),Y
2370 INY
2380 LDA copyhi
2390 STA (swrmem),Y
2400 INY
2410 .wloop
2420 LDA wind,Y
2430 STA (swrmem),Y
2440 INY
2450 CPY #10
2460 BNE wloop
2470 LDA Xpos
2480 STA (swrmem),Y
2490 INY
2500 LDA Ypos
2510 STA (swrmem),Y
2520 INY
2530 LDA forecol
2540 STA (swrmem),Y
2550 INY
2560 LDA backcol
2570 STA (swrmem),Y
2580 LDA swrlo
2590 CLC
2600 ADC #14
2610 STA swrlo
2620 LDA swrhi
2630 ADC #0
2640 STA swrhi
2650 LDA #28
2660 JSR oswrch
2670 LDY #0
2680 .vloop
2690 LDA coords2,Y
2700 JSR oswrch
2710 INY
2720 CPY #4
2730 BNE vloop
2740 LDA #17
2750 JSR oswrch
2760 LDA fore
2770 JSR oswrch
2780 LDA #17
2790 JSR oswrch
2800 LDA back
2810 CLC

```

◀ Windows listing 1 continued

```

2820 ADC #128
2830 JSR oswrch
2840 LDA #12
2850 JSR oswrch
2860 LDA rom
2870 STA latch
2880 STA RAMcopy
2890 RTS
2900 :
2910 .endc
2920 LDA copylo
2930 STA swrlo
2940 LDA copyhi
2950 STA swrhi
2960 LDA rom
2970 STA latch
2980 STA RAMcopy
2990 RTS
3000 J
3010 NEXT
3020 ENDPROC
3030 :

```

Windows listing 1 continued

```

3040 DEF PROCchecksum
3050 IF P%<>%AEB PRINT"Assembly error!"
:VDU7:END
3060 total%=0
3070 FOR loop=&900 TO P%-1
3080 total%=total%+?loop
3090 NEXT
3100 IF total%<> 65377 PRINT"Checksum e
rror!":VDU7:END
3110 ENDPROC
3120 :
3130 DEF PROCsave
3140 PRINT""close=&";~close;", open=&";
~open
3150 PRINT""Press <SPACE> to save ";
3160 REPEAT:a%=GET:UNTILa%=32
3170 *SAVE "WINDOW" 900 B00
3180 ENDPROC

```

Listing 2. Sample Windows procedure

```

10 REM Windows - Listing 2
20 REM by David Lawrence
30 REM for BBC B/B+/M/C/E
40 REM (C) Acorn User December 1986
50 :
60 DEF PROCinit
70 start=&8000:end=&C000
80 open=&990:close=&900
90 slot=4
100 *LOAD WINDOW
110 ?&7B=slot
120 ?&84=start MOD 256
130 ?&85=start DIV 256
140 ENDPROC
150 :
160 DEF PROCopen(L,B,R,T,f,b)
170 IF (?&84+256*?&85)+?&34F*((R-L+1)*(
B-T+1))>end PRINT"Not enough RAM":END
180 ?&70=L: ?&71=B: ?&72=R: ?&73=T
190 ?&88=f: ?&89=b
200 CALLopen
210 ENDPROC
220 :
230 DEF PROCclose
240 IF ?&84+256*?&85=start PRINT"No Win
dows open":END
250 CALLclose
260 ENDPROC

```


YELLOW PAGES

UTILITIES

Listing 3. Windows demo program

```

10 REM Windows- Listing 3
20 REM by David Lawrence
30 REM for BBC B/B+/M/C
40 REM (C) Acorn User December 1986
50 :
60 MODE1:VDU23;8202;0;0;0;
70 PROCinit
80 FORI%=1TO200:GCOL0,RND(4)-1
90 DRAWNRD(1280),RND(1024):NEXT
100 FORI%=0TO3
110 PROCopen(13,12,26,10,I%,3-I%)
120 PRINT" BBC Windows."
130 PROCp(100)
140 PROCclose:PROCp(50)
150 NEXT
160 PROCopen(5,10,9,5,1,2)
170 PRINT" I'm""stillhere!"
180 PROCp(20)
190 PROCopen(1,10,25,1,3,1)
200 PRINT"BBC Windows."
210 PRINT" - works in any mode"
220 PRINT" - uses sideways RAM"
230 PRINT" - overlapping windows"
240 PRINT" Like this ....."
250 PROCp(500)
260 PROCopen(10,15,30,4,0,3)
270 PRINT" And this ....."
280 PROCp(200)
290 PROCopen(15,16,25,5,2,1)
300 PRINT"Windows canbe opened""using
""PROCopen""
310 PRINT""and closed with""PROCclose""
320 PROCp(500)
330 PROCclose
340 PROCp(50)
350 PROCclose
360 PROCopen(5,30,35,25,0,3)
370 PRINT" PROCopen(x1,y2,x2,y1,f,b)
"
380 PRINT" -----
"
390 PRINT"x1,y2,x2,y1 : As normal win
dows";
400 PRINT"f,b : foreground/background"
410 PRINT" colours";
420 PROCp(500)
430 PROCclose
440 PROCopen(9,20,31,15,2,1)
450 PRINT"What do you think then?"
460 PRINT"Could you use something";
470 PRINT"like this in your"
480 PRINT"programs?"
490 PROCp(500)
500 PROCclose
510 PROCclose
520 PROCp(200)
530 PROCclose
540 MODE1
550 END
560 :
570 DEF PROCp(paws)
580 TIME=0:REPEATUNTILTIME>paws
590 ENDPROC
600 :
610 DEF PROCinit
620 start=&8000:end=&C000
630 open=&990:close=&900
640 slot=4

```

Continued ►

◀ Windows listing 3 continued

```

650 *LOAD WINDOW
660 ?%7B=slot
670 ?%84=start MOD 256
680 ?%85=start DIV 256
690 ENDPROC
700 :
710 DEF PROCopen(L,B,R,T,f,b)
720 IF(?%84+256*?%85)+?%34F*((R-L+1)*(
B-T+1))>end PRINT"Not enough RAM":END
730 ?%70=L: ?%71=B: ?%72=R: ?%73=T
740 ?%88=f: ?%89=b
750 CALLopen
760 ENDPROC
770 :
780 DEF PROCclose
790 IF?%84+256*?%85=start PRINT"No Win
dows open":END
800 CALLclose
810 ENDPROC

```

Listing 3a. Changes for listing 3 to work in mode 4

```

60 MODE4:HIMEM=&3000:VDU23;8202;0;0;0;
80 FORI%=1TO200:GCOL0,RND(2)-1
110 PROCopen(13,12,26,10,I%MOD2,1-I%MOD
2)
160 PROCopen(5,10,9,5,0,1)
190 PROCopen(1,10,25,1,1,0)
260 PROCopen(10,15,30,4,0,1)
290 PROCopen(15,16,25,5,1,0)
360 PROCopen(5,30,35,25,0,1)
440 PROCopen(9,20,31,15,1,0)
620 start=&3000:end=&5800

```

See Menu Maker, page 99

Listing 1. Personalising the Compact Desktop software

```

10 REM Personalised Desktop
20 REM by Acorn Computers Ltd
30 REM modified by David Atherton
40 REM for Master Compact
50 REM (c) Acorn User December 1986
60 :
70 PROCptrinit
80 *SHADOW
90 *FX15,1
100 MODE 128
110 VDU 23,16;
120 *SETPAL
130 keyw%=54:keyh%=15*4
140 *FX4,3
150 DIM str% 256
160 PROCcursor(0)
170 ON ERROR GOTO 990
180 screenR%=1280:screenT%=1024-32
190 stepX%=16:stepY%=16:stepmult%=4
200 chY%=32:chX%=16
210 MX%=0:MY%=0:MW%=0:MH%=0
220 Mflag%=0
230 warnX%=320:warnY%=400
240 warnW%=320:warnH%=192+chY%
250 *CLOSE
260 C%=OPENUP "Dirfile"
270 IF C%=0 THEN PROCerr("Can't find Di
rfile")
280 B1%=FNgetstr(C%):B2%=FNgetstr(C%)
290 B3%=FNgetstr(C%)
300 tt1L%=LEN B1%
310 IF LEN B2%>tt1L% THEN tt1L%=LEN B2%
320 IF LEN B3%>tt1L% THEN tt1L%=LEN B3%
330 tt1X%=624-tt1L%*8:tt1Y%=208
340 tt1W%=chX%*(2+tt1L%):tt1H%=224
350 Ms%=VAL FNgetstr(C%)-1
360 IF Ms%<0 THEN PROCerr("Dirfile - Ba
d number")
370 t%=FNgetstr(C%)
380 IF t%<>"" THEN PROCerr("Dirfile - 4
th line not null")

```

Continued ►

COMPACT

```

390 DIM MN$(Ms%,12),file$(Ms%,12)
400 DIM Mpos$(Ms%), Mdep$(Ms%)
410 a%=-1
420 REPEAT
430 d%=-1:mw%=0:a%=a%+1
440 REPEAT
450 d%=d%+1
460 t$=FNgetstr(C%)
470 PROCassign(a%,d%)
480 tmw%=LEN MN$(a%,d%)
490 IF tmw%>mw% THEN mw%=tmw%
500 UNTIL t$=""
510 MN$(a%,d%)=CHR$(0)
520 FOR i=1 TO d%-1
530 MN$(a%,i)=LEFT$(MN$(a%,i)+STRING$(m
w%,CHR$(32),mw%)
540 NEXT
550 Mdep$(a%)=d%-1
560 IF a%=0 THEN Mpos$(a%)=32:GOTO 580
570 Mpos$(a%)=Mpos$(a%-1)+LEN MN$(a%-1,
0)*chX%+64
580 UNTIL E% OR a%=Ms%
590 CLOSE# C%
600 :
610 REM number of windows-1
620 windows%=4
630 DIM windowX%(windows%),windowY%(win
dows%),windowW%(windows%)
640 DIM windowH%(windows%),windowMxW%(w
indows%),windowMnW%(windows%)
650 DIM windowMxH%(windows%),windowMnH%
(windows%),active%(windows%)
660 DIM stack%(windows%),flag%(windows%
)
670 stkpctr%=-1
680 FOR i%=0 TO windows%
690 active(i%)=FALSE:NEXT
700 REM Top of screen heading
710 GCOL0,1:PROCbox(0,950,1279,1023)
720 GCOL32,0:PROCbox(4,954,1275,1019)
730 FOR i%=0 TO Ms%
740 PROCtextwindow(MN$(i%,0),Mpos$(i%),
960)
750 NEXT i%
760 PROCtitlepage
770 cursorW%=2*chX%
780 cursorH%=2*chY%
790 CX%=ADVAL(7):CY%=ADVAL(8)
800 REPEAT
810 *FX22
820 *POINTER
830 REPEAT
840 p%=INKEY(0)
850 UNTIL p%>-1
860 REM new arrow position
870 PROCcursorposn
880 *POINTER 0
890 *FX23
900 thisM%=Ms%+1
910 REPEAT
920 thisM%=thisM%-1
930 found%=CY%>950 AND CX%>=Mpos%(thisM
%) AND CX%<=Mpos%(thisM%)+48+16*LEN(MN$(t
hisM%,0))
940 UNTIL found% OR thisM%=0
950 IF found% PROCmrount(thisM%,0)
960 REM arrow should be off screen
970 UNTIL FALSE
980 :
990 *FX4,3
1000 *POINTER 2
1010 I%=-1
1020 REPEAT I%=I%+1
1030 str%?I%=I%?(!+&FD)
1040 UNTIL str%?I%=0
1050 str%?I%=13
1060 IF FError($str%) GOTO 700
1070 VDU 4,30,10,10,13
1080 *FX23
1090 *POINTER 0
1100 *DIGITAL 0
1110 *KEYS 0
1120 *FX4
1130 *FX229

```

```

1140 END
1150 :
1160 DEF FNErrOr (A$)
1170 ON ERROR OFF
1180 warnW%=(2+LENA$)*chX%
1190 IF warnW%<10*chX%warnW%=10*chX%
1200 IF Mflag% PROCKillM
1210 MOVE warnX%,warnY%
1220 PLOT 0, warnW%, warnH%
1230 VDU 23, 27, 1, 4, 0; 0; 0;
1240 GCOL 0, 1
1250 PROCboxr (warnX%, warnY%, warnW%, warnH
%)
1260 GCOL 0, 0
1270 PROCboxr (warnX%+4, warnY%+4, warnW%-8
, warnH%-8)
1280 *SCHOOSE 8
1290 PLOT &ED, warnX%+chX%, warnY%+chY%DIV
2-8
1300 VDU 5:GCOL0, 1
1310 MOVE warnX%+chX%, warnY%+warnH%-1*ch
Y%
1320 PRINT"Error";
1330 MOVE warnX%+chX%, warnY%+warnH%-2*ch
Y%
1340 PRINTA$;
1350 PROCcursor (0)
1360 REPEAT UNTIL GET=13 OR ((ADVAL (0) AND
7)<>0)
1370 *SCHOOSE 4
1380 PLOT &ED, warnX%, warnY%
1390 GCOL 0, 1
1400 ON ERROR GOTO 990
1410 =(ERR<>17)
1420 :
1430 DEF PROCMrout (thisM%, key%)
1440 IF key%=0 PROCpulldown:ENDPROC
1450 a$=file$ (thisM%, key%)
1460 OSCLI "DIR "+file$ (thisM%, 0)
1470 IF LEFT$ (a$, 2) = "*" THEN OSCLI "*" /
+MID$ (a$, 3):ENDPROC
1480 IF ASC a$=42 THEN OSCLI a$:ENDPROC
1490 CHAIN a$:END
1500 :
1510 REM Pull down Menu routines
1520 DEF PROCpulldown
1530 LOCAL stepY%, stepmult%, MX%, MY%, MW%,
MH%, MD%, o%, key%, i%
1540 stepY%=keyh%:stepmult%=1
1550 MX%=Mpos% (thisM%):MY%=948
1560 MD%=Mdep% (thisM%)
1570 MW%=48+16*LEN (MN$ (thisM%, 1))
1580 MH%=-MD%*keyh%-8
1590 key%=FNMkey
1600 PROCliveM
1610 REPEAT
1620 REPEAT
1630 *FX22
1640 *POINTER
1650 REPEAT
1660 p%=INKEY (0)
1670 PROCcursorposn
1680 key%=FNMkey
1690 UNTILkey%<>o%ORp%>-1
1700 *POINTER 0
1710 *FX23
1720 IF o%>0 AND o%<=MD% PROCinvert (MN$ (
thisM%, o%), MX%+8, MY%-o%*keyh%)
1730 o%=key%
1740 IF key%>0 AND key%<=MD% PROCinvert (
MN$ (thisM%, key%), MX%+8, MY%-key%*keyh%)
1750 UNTIL p%>-1 OR key%>MD%
1760 IF key%>0 AND key%<=MD% ELSE GOTO17
90
1770 PROCMrout (thisM%, key%)
1780 IF Mflag% ELSE PROCliveM:PROCinvert
(MN$ (thisM%, key%), MX%+8, MY%-key%*keyh%)
1790 UNTIL key%>MD%
1800 PROCKillM
1810 REM put cursor back on grid
1820 CX%=stepX%*(CX% DIV stepX%)
1830 CY%=stepY%*(CY% DIV stepY%)
1840 ENDPROC
1850 :
1860 DEF PROCKillM

```

127

YELLOW PAGES

COMPACT

◀ Desktop listing 1 continued

```

1870 REM put back area under M
1880 *SCHOOSE 4
1890 GCOL 0,0
1900 PLOT &ED,MX%,MY%+MH%
1910 Mflag%=FALSE
1920 ENDPROC
1930 :
1940 DEF PROCliveM
1950 REM save area under M
1960 MOVE MX%,MY%:PLOT 0,MW%,MH%
1970 VDU 23,27,1,4,0;0;0;
1980 GCOL 0,1
1990 PROCboxr (MX%,MY%,MW%,MH%)
2000 GCOL 0,0
2010 PROCboxr (MX%+4,MY%-4,MW%-8,MH%+8)
2020 FOR i%=1 TO MD%
2030 PROCtextwindow(MN$(thisM%,i%),MX%+8,
MY%-i%*keyh%)
2040 NEXT
2050 Mflag%=TRUE
2060 ENDPROC
2070 :
2080 DEF FNMkey
2090 IF MX%>CX% OR CX%>MX%+MW%:=MD%+1
2100 =INT((MY%-CY%-12)/keyh%+1)
2110 :
2120 DEF PROCcursor (X%)
2130 VDU 4,23,1,X%,0,0;0;0;
2140 ENDPROC
2150 :
2160 DEF PROCtextwindow(text$,x%,y%)
2170 GCOL 0,1
2180 MOVE x%,y%
2190 PLOT &61,32+chX%*LEntext$,chY%+16
2200 GCOL 0,0
2210 PLOT 0,-3,-1:PLOT &65,x%+4,y%+4
2220 GCOL 0,1:VDU 5
2230 MOVEx%+16,y%+36
2240 PRINTtext$:PROCcursor (0)
2250 ENDPROC
2260 :
2270 DEF PROCinvert(text$,x%,y%)
2280 MOVE x%+4,y%+4
2290 PLOT &62,24+16*LEntext$,32+8
2300 ENDPROC
2310 :
2320 DEF PROCbox (leftx%,bottomy%,rightx%,
topy%)
2330 MOVE leftx%,bottomy%
2340 PLOT &65,rightx%,topy%
2350 ENDPROC
2360 :
2370 DEF PROCboxr (leftx%,bottomy%,w%,h%)
2380 MOVE leftx%,bottomy%
2390 PLOT &61,w%,h%
2400 ENDPROC
2410 :
2420 DEF PROCcursorposn
2430 CX%=ADVAL(7):CY%=ADVAL(8)
2440 ENDPROC
2450 :
2460 DEF PROCtitlepage
2470 GCOL 0,1
2480 PROCboxr (ttlX%,ttlY%,ttlW%,ttlH%)
2490 GCOL 0,0
2500 PROCboxr (ttlX%+4,ttlY%+4,ttlW%-8,ttl
H%-8)
2510 VDU 5:GCOL 0,1
2520 MOVE ttlX%+chX%,ttlY%+ttlH%-chY%*1
2530 PRINT B1$;
2540 MOVE ttlX%+chX%,ttlY%+ttlH%-chY%*3
2550 PRINTB2$;
2560 MOVE ttlX%+chX%,ttlY%+ttlH%-chY%*5
2570 PRINT B3$;
2580 ENDPROC
2590 :
2600 DEF FNgetstr (chan)
2610 LOCAL I$,I%
2620 REPEAT
2630 E%=EOF#chan:IF E% GOTO 2680
2640 I%=BGET#chan
2650 IF I%>31 THEN I$=I$+CHR$I%
2660 UNTIL I%=13
2670 IF ASC I$=32 THEN I$=MID$(I$,2)

```

Continued ▶

◀ Desktop listing 1 continued

```

2680 =I$
2690 :
2700 DEF PROCassign(x,y)
2710 LOCALcomma
2720 comma=INSTR(t$,"")
2730 IF comma GOTO 2750
2740 IF t$="" THEN ENDPROC ELSE PROCer
"No comma in "+t$)
2750 MN$(x,y)=FNstrip(LEFT$(t$,comma-1)
2760 file$(x,y)=FNstrip(MID$(t$,comma-1)
)
2770 IF d%=0 THEN MN$(x,y)=FNstrip(MII
MN$(x,y),5))
2780 ENDPROC
2790 :
2800 DEF FNstrip(A$)
2810 IF ASC A$=32 THEN A$=MID$(A$,2):(
0 2810
2820 IF RIGHT$(A$,1)="" THEN A$=LEFT$
$,LEN A$-1):GOTO2820
2830 =A$
2840 :
2850 DEF PROCptrinit
2860 *SPRITE
2870 *POINTER 0
2880 *KEYS 0
2890 *DIGITAL 0
2900 *MOUSE 0
2910 *TRACKERBALL 0
2920 *POINTER 0
2930 *KEYS
2940 ENDPROC
2950 :
2960 DEF PROCerr(A$)
2970 I%=FNerror(A$)
2980 END

```

Listings 2 to 12. Sample programs

<pre> 10 REM Listing 2 20 REM by David Ather ton 30 REM (c) Acorn User 1986 40 : 50 PRINTTAB(0,28); 60 *FREE 70 *FX15 80 A=GET 90 *DIR ^ 100 CHAIN"MENU" </pre>	<pre> 10 REM Listing 7 - Tr iangle 20 MODE 1 30 MOVE 100,100 40 DRAW 1000,100 50 DRAW 500,1000 60 DRAW 100,100 70 END </pre>
<pre> 10 REM Listing 3 - So und 1 20 MODE 7 30 PRINT"This is Soun d 1" 40 SOUND 1,-15,100,10 50 END </pre>	<pre> 10 REM Listing 8 - Fi lled Square 20 MODE 1 30 GCOL 0,2 40 MOVE 100,100 50 DRAW 1000,100 60 PLOT 85,1000,1000 70 MOVE 100,1000 80 PLOT 85,100,100 90 END </pre>
<pre> 10 REM Listing 4 - So und 2 20 MODE 7 30 PRINT"This is Soun d 2" 40 SOUND 1,-15,50,10 50 END </pre>	<pre> 10 REM Listing 9 - Fi lled Triangle 20 MODE 1 25 GCOL 0,1 30 MOVE 100,100 40 DRAW 1000,100 50 PLOT 85,500,1000 60 DRAW 100,100 70 END </pre>
<pre> 10 REM Listing 5 - So und 3 20 MODE 7 30 PRINT"This is Soun d 3" 40 SOUND 1,-15,25,10 50 END </pre>	<pre> 10 REM Listing 10 - O UIT 20 MODE 7 30 END </pre>
<pre> 10 REM Listing 6 - Sq uare 20 MODE 1 30 MOVE 100,100 40 DRAW 1000,100 50 DRAW 1000,1000 60 DRAW 100,1000 70 DRAW 100,100 80 END </pre>	<pre> 10 REM Listing 11 - L ogLOGO 20 *SRLOAD LOGO 8000 6 I 30 *LOGO </pre>
	<pre> 10 REM Listing 12 - V iew 20 *SRLOAD WORD 8000 7 I 30 VDU 20 40 *WORD </pre>

ACORN USER ORDER FORM

ACORN USER OFFERS

DISC SUBSCRIPTIONS

Yes! Please send me my free disc binder and start my disc subscription

from the _____ Issue

- | | |
|-----------------------|---------------------------------|
| 01 UK | <input type="checkbox"/> £69.00 |
| 02 EUROPE (Airmail) | <input type="checkbox"/> £76.00 |
| 02 OVERSEAS (Surface) | <input type="checkbox"/> £76.00 |
| 03 OVERSEAS (Airmail) | <input type="checkbox"/> £84.00 |

TOTAL VALUE £ _____

CASSETTE SUBSCRIPTIONS

Yes! Please start my cassette subscription from the _____ Issue and send me my free games cassette

- | | |
|-----------------------|---------------------------------|
| 01 UK | <input type="checkbox"/> £45.00 |
| 02 EUROPE (Airmail) | <input type="checkbox"/> £52.00 |
| 02 OVERSEAS (Surface) | <input type="checkbox"/> £52.00 |
| 03 OVERSEAS (Airmail) | <input type="checkbox"/> £62.00 |

TOTAL VALUE £ _____

MAGAZINE SUBSCRIPTIONS

Yes! Please start my subscription to Acorn User magazine from the _____ Issue (UK Subscribers see pages 48 and 52 before completing)

- | | 12 Issues | 27 Issues |
|--------------------------|---------------------------------|---------------------------------|
| 01 UK | <input type="checkbox"/> £17.50 | <input type="checkbox"/> £35.00 |
| 02 EUROPE | <input type="checkbox"/> £25.00 | <input type="checkbox"/> £50.00 |
| 03 MIDDLE EAST | <input type="checkbox"/> £30.00 | <input type="checkbox"/> £60.00 |
| 04 THE AMERICAS & AFRICA | <input type="checkbox"/> £35.00 | <input type="checkbox"/> £70.00 |
| 05 REST OF THE WORLD | <input type="checkbox"/> £40.00 | <input type="checkbox"/> £80.00 |

TOTAL VALUE £ _____

ACORN USER MONTHLY DISCS

- | 1985 | 1986 | |
|-------------------------------------|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> OCT 0201-1 | <input type="checkbox"/> JAN 0204-6 | <input type="checkbox"/> JUL 0210-0 |
| <input type="checkbox"/> NOV 0202-X | <input type="checkbox"/> FEB 0205-4 | <input type="checkbox"/> AUG 0211-9 |
| <input type="checkbox"/> DEC 0203-8 | <input type="checkbox"/> MAR 0206-2 | <input type="checkbox"/> SEP 0212-7 |
| | <input type="checkbox"/> APR 0207-0 | <input type="checkbox"/> OCT 0213-5 |
| | <input type="checkbox"/> MAY 0209-7 | <input type="checkbox"/> NOV 0214-3 |
| | <input type="checkbox"/> JUN 0209-7 | <input type="checkbox"/> DEC 0215-1 |

UK=£5.95
Europe=£6.95
Overseas=£7.95

TOTAL VALUE £ _____

ACORN USER MONTHLY CASSETTES

- | 1984 | 1985 | 1986 |
|-------------------------------------|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> MAY 0401-4 | <input type="checkbox"/> JAN 0409-X | <input type="checkbox"/> JAN 0421-9 |
| <input type="checkbox"/> JUN 0402-2 | <input type="checkbox"/> FEB 0410-3 | <input type="checkbox"/> FEB 0422-7 |
| <input type="checkbox"/> JUL 0403-0 | <input type="checkbox"/> MAR 0411-1 | <input type="checkbox"/> MAR 0423-5 |
| <input type="checkbox"/> AUG 0404-9 | <input type="checkbox"/> APR 0412-X | <input type="checkbox"/> APR 0424-3 |
| <input type="checkbox"/> SEP 0405-7 | <input type="checkbox"/> MAY 0413-8 | <input type="checkbox"/> MAY 0425-1 |
| <input type="checkbox"/> OCT 0406-5 | <input type="checkbox"/> JUN 0414-6 | <input type="checkbox"/> JUN 0426-X |
| <input type="checkbox"/> NOV 0407-3 | <input type="checkbox"/> JUL 0415-4 | <input type="checkbox"/> JUL 0427-8 |
| <input type="checkbox"/> DEC 0408-1 | <input type="checkbox"/> AUG 0416-2 | <input type="checkbox"/> AUG 0428-6 |
| | <input type="checkbox"/> SEP 0417-0 | <input type="checkbox"/> SEP 0429-4 |
| | <input type="checkbox"/> OCT 0418-9 | <input type="checkbox"/> OCT 0430-8 |
| | <input type="checkbox"/> NOV 0419-7 | <input type="checkbox"/> NOV 0431-6 |
| | <input type="checkbox"/> DEC 0420-0 | <input type="checkbox"/> DEC 0432-4 |
- UK= £3.95
Europe=£4.95
Overseas=£5.95

TOTAL VALUE £ _____

ACORN USER MAGAZINE BACK ISSUES

- | 1984 | 1985 | 1986 |
|-------------------------------------|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> MAY 0013-2 | <input type="checkbox"/> JAN 0021-3 | <input type="checkbox"/> JAN 0032-9 |
| <input type="checkbox"/> JUN 0014-0 | <input type="checkbox"/> MAR 0022-1 | <input type="checkbox"/> FEB 0033-7 |
| <input type="checkbox"/> JUL 0015-9 | <input type="checkbox"/> APR 0023-X | <input type="checkbox"/> MAR 0034-5 |
| <input type="checkbox"/> AUG 0016-7 | <input type="checkbox"/> MAY 0024-8 | <input type="checkbox"/> APR 0035-3 |
| <input type="checkbox"/> SEP 0017-5 | <input type="checkbox"/> JUN 0025-6 | <input type="checkbox"/> MAY 0036-1 |
| <input type="checkbox"/> OCT 0018-3 | <input type="checkbox"/> JUL 0026-4 | <input type="checkbox"/> JUN 0037-X |
| <input type="checkbox"/> NOV 0019-1 | <input type="checkbox"/> AUG 0027-2 | <input type="checkbox"/> JUL 0037-8 |
| <input type="checkbox"/> DEC 0020-5 | <input type="checkbox"/> SEP 0028-0 | <input type="checkbox"/> AUG 0039-6 |
| | <input type="checkbox"/> OCT 0029-9 | <input type="checkbox"/> SEP 0040-X |
| | <input type="checkbox"/> NOV 0030-2 | <input type="checkbox"/> OCT 0041-8 |
| | <input type="checkbox"/> DEC 0031-0 | <input type="checkbox"/> NOV 0042-6 |
| | | <input type="checkbox"/> DEC 0043-4 |
- UK=£1.75
Europe=£2.25
Overseas=£3.75

TOTAL VALUE £ _____

BINDERS

TOTAL VALUE £ _____

- | | UK | EUROPE | OVERSEAS |
|------------------------|--------------------------------|---------------------------------|---------------------------------|
| MAGAZINE BINDER 1201-7 | <input type="checkbox"/> £4.95 | <input type="checkbox"/> £7.95 | <input type="checkbox"/> £14.95 |
| DISC BINDER 1301-3 | <input type="checkbox"/> £9.95 | <input type="checkbox"/> £12.95 | <input type="checkbox"/> £19.95 |

Telephone Orders 01-836 2441 9.30 am to 5.00 pm. Ask for Seran.

ACORN USER ORDER FORM

ACORN USER OFFERS

ACORN USER ROMS

- | | |
|--|------------------|
| <input type="checkbox"/> USERDUMP 1001-4 | UK = £19.95 |
| <input type="checkbox"/> USERROM 1002-2 | Europe = £20.95 |
| <input type="checkbox"/> AXRRROM 1003-0 | Overseas = £21.9 |

TOTAL VALUE £ _____

ACORN USER SPECIAL CASSETTES

- | | | |
|--|--------|------------------|
| <input type="checkbox"/> ACORN USER GRAPHICS | 0601-7 | UK = £3.95 |
| <input type="checkbox"/> BEST OF ACORN USER | 0602-5 | Europe = £4.95 |
| <input type="checkbox"/> GAMES COMPENDIUM | 0603-3 | Overseas = £5.95 |
| <input type="checkbox"/> FINEST FAVOURITES | 0604-1 | |

TOTAL VALUE £ _____

ACORN USER SPECIAL DISCS

GALLERY DISC
40 track 0801-X ☐ 80 track 0802-8 ☐

GALLERY COLLECTION DISC
40 track 0840-0 ☐ 80 track 0841-9 ☐

DISC HELP DISC
80 track 0804-4 ☐ UK = £6.95
Europe = £7.95
Overseas = £8.95

PRINTER HELP DISC
40 track 0820-6 ☐ 80 track 0821-4 ☐

GRAPHICS UTILITIES DISC
40 track 0830-3 ☐

EDUCATION DISC
40 track 0815-X ☐ UK = £7.95
Europe = £8.95
Overseas = £9.95

TOTAL VALUE £ _____

SIDEWAYS RAM
UTILITIES DISC
40 track 0825-7 ☐

UK = £9.95
Europe = £10.95 Overseas = £11.95

NETWORK UTILITIES
DISC
80 track 0809-5 ☐

UK = £19.95
Europe = £20.95 Overseas = £21.95

	UK	EUROPE	OVERSEAS
40T-Jul 1982 to May 1984	0851-6 <input type="checkbox"/> £7.97	<input type="checkbox"/> £8.95	<input type="checkbox"/> £9.95
40T-Jun 1984 to May 1985	0852-4 <input type="checkbox"/> £7.95	<input type="checkbox"/> £8.95	<input type="checkbox"/> £9.95
40T-Jun 1985 to Feb 1986	0853-2 <input type="checkbox"/> £7.95	<input type="checkbox"/> £8.95	<input type="checkbox"/> £9.95
40T-Jul 1982 to Feb 1986	0881-8 <input type="checkbox"/> £21.95	<input type="checkbox"/> £22.95	<input type="checkbox"/> £23.95
80T-Jul 1982 to May 1985	0901-6 <input type="checkbox"/> £11.95	<input type="checkbox"/> £12.95	<input type="checkbox"/> £13.95
80T-Jun 1985 to Feb 1986	0902-4 <input type="checkbox"/> £7.95	<input type="checkbox"/> £8.95	<input type="checkbox"/> £9.95
80T-Jul 1982 to Feb 1986	0931-8 <input type="checkbox"/> £17.95	<input type="checkbox"/> £18.95	<input type="checkbox"/> £19.95

☐ I enclose a sterling cheque/postal order for a total of £ _____ made payable to Redwood Publishing

☐ Please debit my ☐ Visa (Barclaycard) ☐ Access (Mastercard)

*Overseas orders are now sent Airmail

Creditcard number

Expiry date

SIGNED _____

DATE _____

MR/MRS/MISS/MS _____

INITIALS _____

SURNAME _____

POSTCODE _____

TELEPHONE _____

Please return your order to:- Acorn User Mail Order, Lambourn Woodlands, Newbury, Berkshire RG16 7TW

For Office Use Only

0	0																		
2	0	0	1	X	0	4	3	N	Y	D	P								
B41																			

Telephone Orders 01-836 2441 9.30 am to 5.00 pm. Ask for Seran

CHARTS


Check out the latest position of your favourite game

TOP 20 BBC MICRO GAMES

Title	Publisher	Cassette	Disc	B+	Master	Reviewed
1 (3) Kane	Mastertronic	£1.99	—	No	No	—
2 (2) Psycastria	Audiogenic	£7.95	£11.95	Yes	Yes	—
3 (1) Thrust	Superior	£7.95	£11.95	Yes	Yes	—
4 (11) Spy Hunter	US Gold	£9.99	£14.99	No	*	October '86
5 (4) League Challenge	Atlantis	£2.99	—	No	No	—
6 (—) Trivial Pursuit	Domark	£14.95	£19.95	Yes	Yes	—
7 (5) Commando	Elite	£9.95	£14.95	Yes	Yes	August '86
8 (7) Air Wolf	Elite	£9.95	£14.95	Yes	Yes	—
9 (10) Ian Bothams Test Cricket	Tynesoft	£7.95	£11.95	Yes	Yes	—
10 (—) Galaforce	Superior	£9.95	£11.95	Yes	Yes	December '86
11 (8) Mikie	Imagine	£8.95	—	No	No	November '86
12 (9) Commonwealth Games	Tynesoft	£7.95	£9.95	Yes	Yes	—
13 (7) Cricket	Bug Byte	£2.99	—	Yes	Yes	December '86
14 (14) Winter Olympics	Tynesoft	£9.95	—	*	*	September '86
15 (15) Bruce Lee	US Gold	£9.95	£14.95	No	No	August '86
16 (—) Jack Attack	Bug Byte	£2.99	—	Yes	Yes	September '86
17 (—) Raid Over Moscow	US Gold	£9.99	—	No*	No*	November '86
18 (18) Citadel	Superior	£9.95	£11.95	Yes	*	March '86
19 (—) Strike Force Harrier	Mirrorsoft	£9.95	£12.95	Yes	Yes*	January '86
20 (12) Yie Ar Kung Fu	Image	£9.95	£12.95	Yes*	Yes*	March '86



Trivial Pursuit: Impossible questions, new at 6

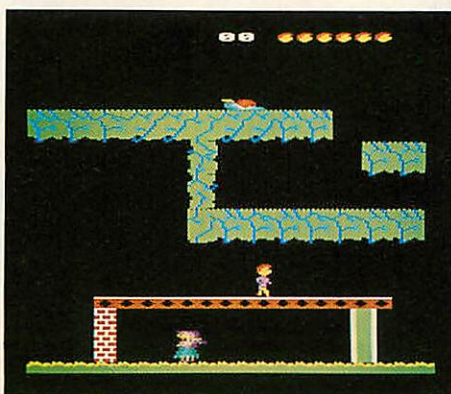

Jack Attack: Attacking once more at number 16



Commando: Down one chart and up the other

TOP 10 ELECTRON GAMES

Title	Publisher	Cassette	Disc	Reviewed
1 (1) Commonwealth Games	Tynesoft	£7.95	£9.95	—
2 (2) Galactic Patrol	Mastertronic	£1.99	—	—
3 (4) Commando	Elite	£9.95	£14.95	August '86
4 (7) Yie Ar Kung Fu	Imagine	£9.95	£12.95	March '86
5 (—) Galaforce	Superior	£9.95	£11.95	December '86
6 (5) Psycastria	Audiogenic	£7.95	£11.95	—
7 (6) Mikie	Imagine	£8.95	—	November '86
8 (9) Jack Attack	Bug Byte	£2.99	—	September '86
9 (—) Computer Hits 10	Beau Jolly	£9.95	—	July '86
10 (—) Killer Gorilla	Micro Power	£6.95	£9.95	—

COMPILED BY GALLUP/MICROSCOPE

* PLEASE CHECK COMPATIBILITY

The first release to include a specially enhanced version for the BBC Master making use of its 256K RAM. An extra 40K of detailed graphics are provided together with additional game features and atmospheric music.

STRYKERS Run



Commander Stryker under fire in the city



Battling in the air



An action close-up



Enemy equipment (Enhanced BBC Master version)



A camouflaged Battle fortress (Enhanced BBC Master version)

STRYKER'S RUN for the BBC Micro B, B+, Master and Master Compact.

Stryker's Run features probably the best graphics ever seen on the BBC Micro; the action is intense and the animation is superlative.

The battlefield graphics include cities, edifices, wrecked buildings, trees, gravestones, bridges, despatch-posts, military bases, helicopters and jet ships, with hills and mountains in the background. The Master-enhanced version also includes statues, watch-towers, a neglected cafe, a deserted cinema, aircraft hangars, aeroplanes, trucks and tanks.

For many years, a war has ensued between the Allied Nations and the Volgans. The battle was reaching a stalemate position, but recently the Allies through good intelligence work and some luck have managed to obtain the plans of the Volgan's next offensive. If the Allied Forces can capitalise on these plans they can end the impasse and the war. You play the role of Commander John Stryker commissioned to take this top-secret information to the Allies' HQ.

Your character in the game can jump, run, duck, fire his laser pistol and throw grenades. He can also board aircraft and fly them, making use of their more powerful weaponry.

Your opponents, the Volgans, have a variety of weapons at their disposal comprising rifles, pistols, grenades, machine-guns, mortars, mines, helicopter gunships, rocket launchers and SAM missiles.

Game Author: Chris Roberts.

PRICE: £9.95 (cassette), £11.95 (BBC Micro 5¼" disc), £14.95 (Master Compact 3½" disc).

PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES PRIZES

If you complete the game, you can enter our competition. The prizes include a radio controlled 4-wheel-drive off-road racer (worth £200) complete with control system, trophies and £20 in consolation prizes.

Closing date: 31st March, 1987.

Compatible with the BBC B, B+, Master and Master Compact computers.



ACORNSOFT

Dept. RS2, Regent House,
Skinner Lane,
Leeds LS7 1AX.
Telephone: 0532 459453.



24 HOUR TELEPHONE
ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

REVIEWS

GAMES

CHEAP AT THE PRICE

The Price of Magik



Level 9 Computing

'Price of Magik', Level 9, BBC B and Master (text only), £9.95 (cassette). Pity *Acorn User* isn't audio-visual. There would be a deal of whistlin' an' swaggin' going on right now. *Price Of Magik* must be the nicest adventure Level 9 have ever produced – because I managed to finish it, and within two days! But come to think of it, it seemed just as devious as usual, so I probably just got lucky. Magnanimity in victory (but not in defeat).

The point of the game is to become as insane as possible and thereby defeat the evil Myglar to become the new guardian of the Red Moon Crystal. At least you know what you're supposed to be doing for once. (Level 9 please note, it does help if you're not left staggering around wondering what to do next – though I suppose you know that.) Anyone who attempts this game minus cheat-sheet is insane already and in with a good chance.

It's as dastardly as ever, with over 200 rooms, filled with nasty things causing sudden death. No, this isn't one of those boring games where you merely get killed every three moves. Here you decide that

this world is not for you with the dawning realisation that you're educationally sub-normal, rather than from frustration. You do get a chance to run away from things, and to rejuvenate yourself. My kind of game, in other words (Grecian 2000 rules!).

Now for a few tips: it's not wise to go around arbitrarily killing things – only kill if attacked. You can carry as much as you like – you don't have to go around dropping stuff all over the place. There are clues all around, you just have to be clever enough to recognise them. I was, of course... but, I did tell you I finished the game, didn't I?

However, I must admit to a few difficulties. This is no piece of cake. It took me at least four hours to make the lousy Bat bring me the wheel. But the desire to prove myself to the sniggering onlookers drove me ever onward. When the going gets tough, the tough get going.

The psychopaths at Level 9 have once again proved themselves to be vastly superior to any other adventure writers in the market, with all the wit and low cunning that we've come to expect from them. Still, I can now bask in the golden glow of victory – until the next one arrives.

Harry Sinclair

COLLABORATIVE COMPETENCE



'Galaforce', Superior Software/Acornsoft, BBC B/B+/M/E cassette £9.95, 5.25in disc (model B and Master), 3.5in disc (Compact) £11.95

This is the first game to carry the presti-

gious dual Superior/Acornsoft logo, said to be the culmination of three months of negotiations and travels.

Both software houses have produced several excellent shoot-em-up games in the past, and *Galaforce* is another. It's played invader style, by controlling a ship equipped with auto-repeating cannon, which moves left and right at the bottom of the screen, while wave upon wave of ships attack in *Zalaga* style formations.

A neat touch is the ability to alter the colour combinations to suit your own TV or monitor – particularly valuable to those of us who do at least some of our computing on the old black and white portable – but, all in all, playing *Galaforce* is rather like listening to yet another ageing rock group – very smooth and professional but with none of the raw energy and originality which makes you sit up and take notice, enthusiasm renewed.

Unfortunately for folk like me with access to an Electron at home and a BBC micro at work, BBC micro and Electron versions are sold separately, instead of on a double sided tape. However, a labelling error meant I was sent a BBC micro version for review on my Electron. I subsequently exchanged this for the correct version, so I have played both.

The BBC micro game is more tuneful and of a satisfyingly infuriating level of difficulty, while on the Electron, the sound is poor, and the invaders' timing distressingly naive. If you can position yourself in the correct spot for each wave, they just line up to be zapped.

Though Superior now sell more copies of the Electron versions of their games, the packaging of *Galaforce* is, as usual, BBC micro orientated. The cassette version comes in a double cassette box – you feel you've been fooled into buying one cassette instead of two, and the box doesn't fit cassette storage racks.

Galaforce is, then, an unpretentious 'get them before they get you' game. However, if you want another one of this genre, you'll find the game better than most of the others around at the moment.

Bernard Emblem

REVIEWS

SOFTWARE

MOVIE MADNESS

Phil Wilkes takes the director's chair to produce animated films on screen

Most people have at some time fancied having a go at making a film. Can a humble BBC micro help in fulfilling this ambition? *Movie Maker*, from the oddly named Slippery Slug, is an attempt to provide the means of producing animated 'films' using only the facilities of the micro. Don't think that you're going to become the next Spielberg, though! The animations are limited to the coarse teletext graphics of mode 7, and there are no facilities for including sound effects.

The package contains two ROM chips, a demonstration tape, an instruction booklet, a function key strip and a large scenery planning map. Once the ROMs are fitted, the program is entered simply by typing *MM. All of the code for entering, editing and running a film is contained on the ROMs – tapes or discs are needed only to load and save your masterpieces.


The system works quite happily with either tape or disc, although there is a warning that some minor difficulties may be found with non-standard disc interfaces. Recommendations for overcoming these are included in the manual.

On entering the program, a main menu is presented. This gives options to load or save a complete film, to load and run a film, to save the current frame or to list the memory contents. You are advised in the booklet to run the demonstration film at this stage to get an idea of what the package is capable of.


Demonstration shorts

There are in fact two demonstration films. One does not need the ROMs present and is being sold with an introductory leaflet for £1.95. This is a great idea – it allows you to see what the package can do without having to spend a fortune on it first.


The second demonstration needs the ROMs to be fitted, and runs for a full 20 minutes. The story is dreadful, centring on an unhappy wheelbarrow and the attempts of a walking, talking shed to cheer it up! It does however show what can be done and, even more importantly, once you have seen it, you can examine it to find out exactly how it is done. I was particularly impressed by a sequence depicting a sunrise, in which the sky

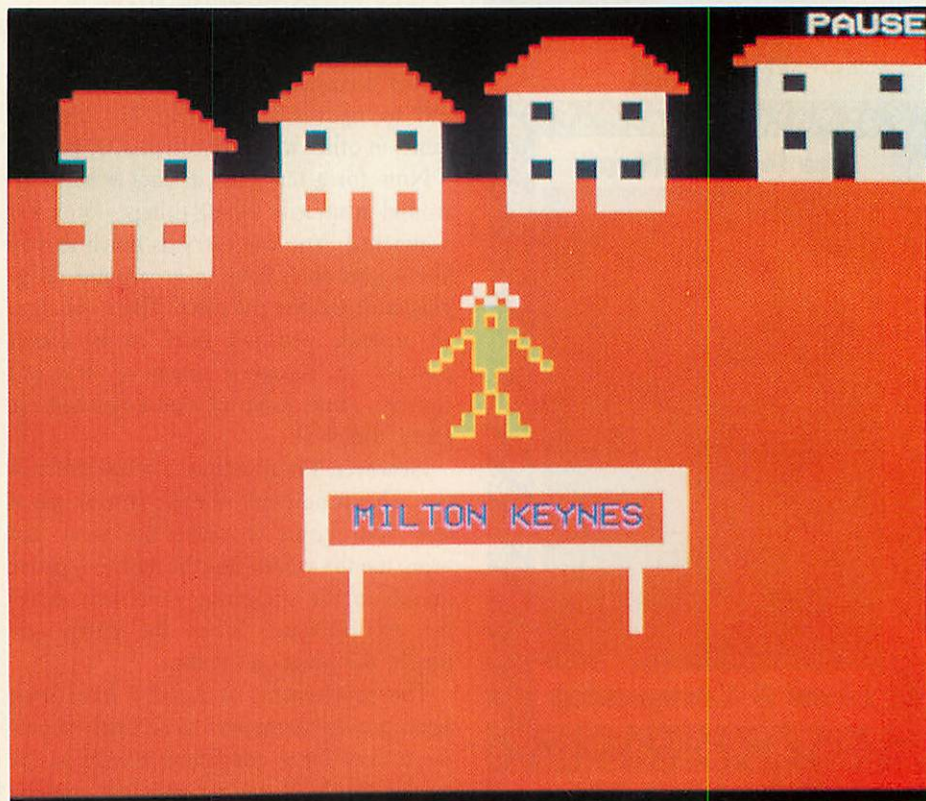

Mode 7 text can be incorporated into the graphics

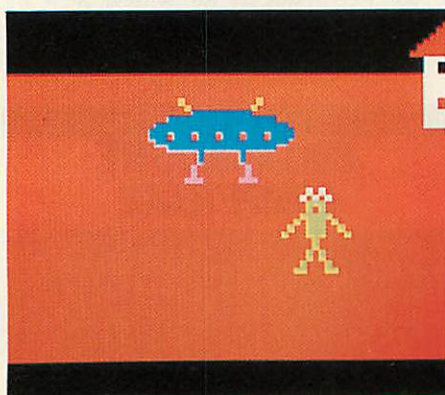

Walt Disney watch out . . .

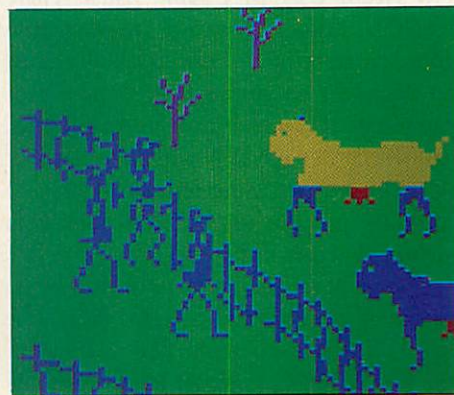

. . . Phil Wilkes gets animated

and ground changed colour as the sun rose majestically in the eastern sky.

But back to the package itself. It would be useful at this point to introduce a few basic concepts used throughout *Movie Maker*. All the action takes place on the Scenery Map, which spans many screens both up and down and side to side. The screen can scroll over this or jump to any location. On this map shapes can be placed, which are drawn on the Screen

Pad. This is like a drawing pad, superimposed on the Scenery Map. When a shape has been drawn, it is 'defined', which gives the shape a name, a maximum size and places it on the Scenery Map. Shapes are limited to approximately one quarter of the full screen size, although larger shapes can easily be defined as two adjoining shapes.

Drawing uses a cursor which can be the size of either a single teletext pixel or a complete

character. Three pen positions are available—draw, rub out and up, and these are indicated on an informative message line at the bottom of the screen. The contents of the line change, depending on the pen position currently in use, and this makes sure that you always have a good idea of what you are doing.

All the features of mode 7 are available. The mode assumes the use of graphics, but text (single and double height, plus a special big text mode), foreground and background colours, flashing and separated graphics are all available. Indeed, the package can double as a standard teletext screen editor.

Once drawn, shapes may be repeated at other locations on the map. This is efficient on memory, as only the new co-ordinates are recorded—the shape itself is only held once. In this way, backgrounds are easy to build up from simple units. A street, for example, may be drawn by duplicating houses, or a forest by duplicating trees.

Making shapes move

Shapes may also be programmed and it is this facility that really makes *Movie Maker* unique. First, shapes can be made to move about the Scenery Map, simply by pointing to the shape, entering program mode and using the cursor keys to enter the movements. Diagonal movements are also possible using the shifted cursor keys.

Second, each shape can have a number of Edit Cycles defined, which allow animation of the shapes themselves.

The package conserves memory by defining a given movement, and then calling that movement when required. This allows the same movement to be repeated at any stage in the film. Both one-shot and repetitive movements are possible, the latter continuing until terminated by another command. Thus a person out walking or a bird flapping its wings is reasonably simple to achieve.

Text may also be programmed and may be used as a subtitle at the bottom of the screen, or as a scrolling bubble above the programmed shape. This is quite a clever means of allowing characters to talk, although it demands close attention by the viewer of the final film.

Once your film or presentation is complete, it is possible to use it on machines without the *Movie Maker* ROMs, using the stand-alone playback code contained on the demonstration tape.


I will not go into exactly how each of these facilities is programmed as this would entail rewriting most of the manual. Suffice it to say that most of the facilities you would wish for are there, and it is always possible to edit or delete sections which have gone wrong (and I

should know!). A range of information may also be called up to assist in knowing what is going on.

The package is however not the easiest I have ever had to get to grips with. Programming involves a combination of single key presses, cursor movements, function keys (alone and with Shift and Control) and star commands. The manual, while comprehensive, is not too well laid out (it is not clear where one section ends and another begins),

film animation, with this or any other method available, with or without computers.

Using *Movie Maker* makes the process accessible to anyone with a little application to learn the package and I have to say I enjoyed using it to produce a sample film for this review. It has applications not only for cartoon-type films but also for information displays of any kind where the animation and special effects possible could liven up an otherwise conventional teletext presentation.

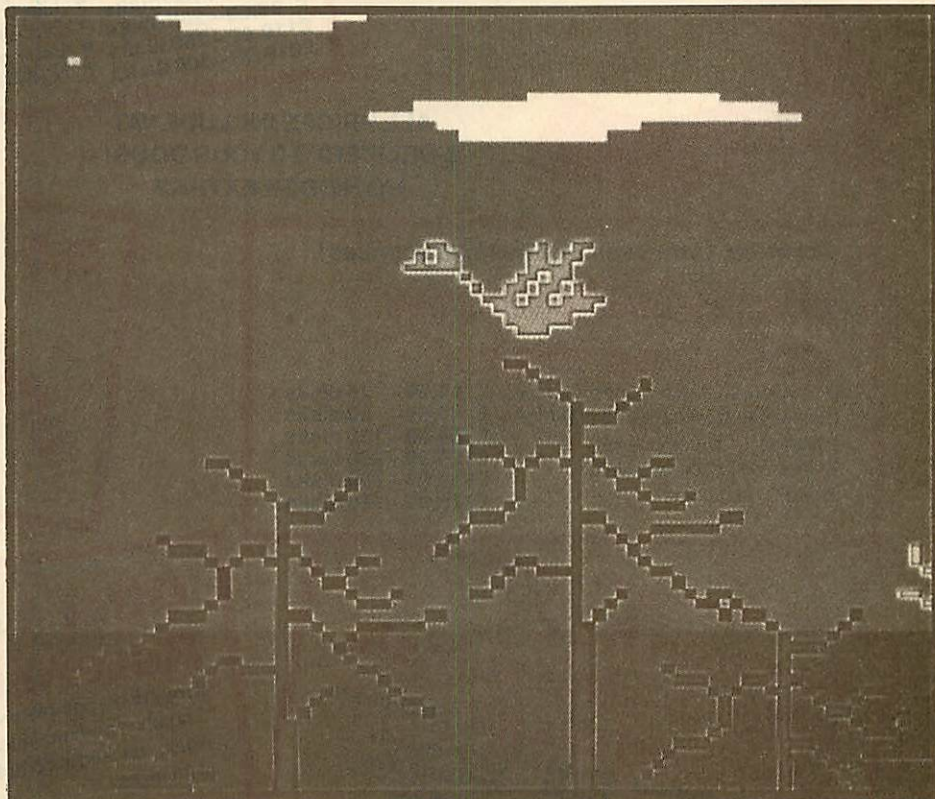

It's simple to use repetitive movements to make a bird flap its wings

contains few worked examples (although the one on animating a walking figure is very good) and there are a few typographical errors (my favourite being 'the data is created in a compact manor'!). Worst of all, there is no quick reference list or card. Given the multitude of different commands available, this is quite a serious omission, and one which would not have been hard to rectify.

That said, *Movie Maker* offers facilities for animated displays which only an experienced machine code programmer could otherwise achieve. The speed and maximum length of film possible are a credit to the programmers. However the package is handicapped by the inevitable choice of mode 7 to allow the memory needed for this. It would also greatly benefit from the inclusion of sound. If it were possible to integrate this package with a speech synthesizer, it would add yet another dimension to it.

Movie Maker is a difficult package to sum up. It is inevitably a complex and time-consuming task to define and choreograph a

There is also nothing else available for the BBC micro which offers a comparable range of facilities. Therefore, while it has its limitations, I believe that *Movie Maker* is a valuable addition to the software available for the BBC range of micros.

I would, however, advise would-be buyers to see the demonstration tape before parting with the full price. This will show you exactly what can be done and should clarify whether or not it will meet your requirements. Should you go ahead, the cost of the demonstration tape will be deducted from the £29.90 charged for the full package.

The package includes two ROMs, demonstration tape, instruction booklet, function key-strip and a large scenery planning map. The entire package costs £29.90.

A demonstration package retailing at £1.95 can also be purchased; the cost is deducted from the full package price it purchased.

Movie Maker runs on the BBC B, B+, Master and Compact. Contact Slippery Slug, PO Box 83, Bath BA1 1ZA. Tel: (0225) 69236.

Cut-Price Disks – Lowest Yet!

from only £14.99 for 25 disks delivered to your door



**Cash 'n Carry
prices on
disks from
Direct Disk
Supplies**

Offer 1 – 5.25" 'Universal' Hlgrade disks

to suit all drives SSDD, SSDD, SSDD, DSDD & DSQD 48 or 96tpi (40/80) on!

- £ 14.99 – 25 disks
- £ 26.99 – 50 disks
- £ 49.99 – 100 disks
- £ 96.99 – 200 disks
- £119.99 – 250 disks
- £219.99 – 500 disks

- ★ Full spec Hlgrade disks, made to 60% clipping level
- ★ Life-time no quibble warranty
- ★ Hub-rings on 5.25" disks
- ★ Label sets & envelopes included
- ★ No extras – VAT & delivery included.

**ALL PRICES INCLUDE VAT
& DELIVERY TO YOUR DOOR! –
NO HIDDEN EXTRAS**

Coloured 'Universal' disks at lowest prices!

Hlgrade Rainbow Coloured disks

Use coloured disks to code your files.
Buy our rainbow pack of 5 different
coloured 'Universal' disks.
Without doubt the best value
in quality and price.

- £ 18.99 – 25 disks
- £ 35.99 – 50 disks
- £ 69.99 – 100 disks
- £129.99 – 200 disks
- £149.99 – 250 disks
- £279.99 – 500 disks

3.5" Hlgrade disks

(single or double sided 135tpi)
Life-time Warranty & fully certified

Single sided	Double sided	Qty
£ 39.99	£ 49.99	25 disks
£ 75.99	£ 85.99	50 disks
£139.99	£159.99	100 disks
£259.99	£299.99	200 disks
£319.99	£365.99	250 disks

Bargain Box Offer 5 – Mitsubishi branded disks

at trade prices.
Get 20 disks for
the normal price
of ten 5.25".

- SSDD-48 20 disks £11.99
- SSDD-96 20 disks £16.99
- DSDD-48 20 disks £16.99
- DSDD-96 20 disks £19.99

Offer 4 Save money by using both sides Reversible Media Life

floppy disks complete with
2 notches and two index holes.
Again, packed in complete sets
of 25 disks.

- £ 18.99 – 25 disks
- £ 35.99 – 50 disks
- £ 69.99 – 100 disks
- £129.99 – 200 disks
- £149.99 – 250 disks
- £279.99 – 500 disks

Same day despatch – at no extra cost

3M – The BRAND leaders

at CASH 'N CARRY prices

Offer 6 – If it's quality, reliability and security then it's 3M. Direct Disk Supplies always give the best price. In fact it's so special that the minimum quantity is 20 disks, and the offer will close on the 30th November 1986.

- SSDD-48tpi 744 20 disks £24.99
- DSDD-48tpi 745 20 disks £28.99
- DSDD-96tpi 747 20 disks £35.99

Remember VAT & Delivery
are included – No extras from DDS

****We've moved! **
Please note our new
address**

Owing to continued growth we've moved
to larger premises. Callers are still very
welcome between 9.30am and 5.00pm.

How to Order

1. DIAL-A-DISK on 01-979 7811, and give your ACCESS or VISA number and expiry date.
2. Send your cheque etc. to Direct Disk Supplies Ltd. at the new address below.
3. Official Orders. Bona-fide orders from Universities, Colleges, Schools, Charities, etc. are very welcome.

Show Guide to even more special bargains!!

Visit Direct Disk Supplies at the following shows:-

Micro-User	7-9 November – Stand 101
Commodore Horizons	21-23 November – Stand 144
Atari	28-30 November – Stand 101
ZX Microfair	13 December



DDS UK



Direct Disk Supplies Ltd., FREEPOST, 129 High Street, Hampton Hill, Middlesex TW12 1NJ

REVIEWS

GAMES

PLAYER'S POSSE

A personal charting of David Lawrence's favourite games and adventures of 1986, plus one prize dud

Since the last *Acorn User* games roundup (February 1985), there has been a marked change in the way games have been produced. Previously, companies thought that quantity was the best policy and released large numbers of, let's face it, bad games. Nowadays, you'll be lucky to see a new release every month! However, the quality of games has improved dramatically, and most games currently on the market are well worth their price. In this article I present my personal top ten games of the last two years and also a special Golden Turkey Award.

Top Ten 1985/86

- | | |
|--|--------------------|
| 1 <i>Thrust</i> | Superior Software |
| 2 <i>Citadel</i> | Superior Software |
| 3 <i>Boffin</i> | Addictive Software |
| 4 <i>Revs</i> | Acornsoft |
| 5 <i>Tapper</i> | US Gold |
| 6 <i>Spy Hunter</i> | US Gold |
| 7 <i>Trivial Pursuit</i> | Domark |
| 8 <i>The Way of the Exploding Fist</i> | |

- | | |
|---------------------|-------------------|
| | Melbourne House |
| 9 <i>Repton 2</i> | Superior Software |
| 10 <i>Galaforce</i> | Superior Software |
- Close contenders : *Airwolf* (Elite), *Scrabble* (Leisure Genius), *Nightshade* (Ultimate), *Atic Atac* (Ultimate)

Top Five Adventures

- | | |
|-----------------------------|-----------------|
| 1 <i>Bored of the Rings</i> | Silversoft |
| 2 <i>Worm in Paradise</i> | Level 9 |
| 3 <i>Emerald Isle</i> | Level 9 |
| 4 <i>Hampstead</i> | Melbourne House |
| 5 <i>Terrormolinos</i> | Melbourne House |

Thrust from Superior is one of the few games that has a simple, easy to follow plot, but still manages to become an extremely interesting and challenging game. 'Collect the pods and fuel; shoot the guns and reactors' – that's all there is to it. Except be warned, don't forget the laws of gravity, inertia and momentum! Good scrolling too.

Graphics	90 per cent
Sound	75 per cent
Addictiveness	90 per cent
Value	90 per cent

One of the few graphic adventures I have completed is *Citadel*, so I am slightly biased, but the game is very well written



Thrust: simple rules but very challenging.

with pretty graphics and fiendishly difficult puzzles spreading over at least 100 rooms. A sequel has also been promised.

Graphics	85 per cent
Sound	70 per cent
Addictiveness	80 per cent
Value	80 per cent

Addictive's *Boffin* might have been missed by some of you key-bashers out there. In my opinion, it is one of the best 'ladder and platform' games ever written. The idea is standard – collect all the objects on a screen (in this case horse-shoes) and make your way to the exit. The quality of the graphics is brilliant, especially the 'thing' in the fourth cave!

Graphics	89 per cent
Sound	75 per cent
Addictiveness	90 per cent
Value	86 per cent

Revs from Acornsoft is the best racing simulator on a home micro. Written by Geoffrey Crammond (author of *Aviator*) in conjunction with David Hunt. *Revs* is an extremely accurate representation of a formula three car, indeed on your first few goes maybe even too accurate (as you go spinning off the first bend for the umpteenth time!), but once mastered *Revs* can be very

addictive especially when trying to trim precious seconds off your lap time.

Graphics	95 per cent
Sound	85 per cent
Addictiveness	70 per cent
Value	60 per cent

Tapper was one of first BBC micro conversions from the highly popular Commodore 64 range of US Gold titles. Again the idea is simple – serve the customers in your bar with soda – but after the first couple of screens, the action becomes unbelievably hectic as the customers advance, slinging their glasses up the bar, and demanding more soda. Don't drop a glass or send too many down the bar as this doesn't go down well with the management!

Graphics	70 per cent
Sound	85 per cent
Addictiveness	85 per cent
Value	70 per cent

Spy Hunter, also from US Gold, places you in a sports car fitted with machine guns. You are placed on a road that goes through woods and over bridges and must shoot the enemy cars or ram them off the road. You can also be equipped with smoke screens, oil slicks and anti-aircraft missiles by 'docking' with the weapons van which occasionally appears. The car changes into a speedboat if you enter the boat house, and then the action continues on the water. All this drama is to the tune of good ol' 'Peter Gunn'.

Graphics	70 per cent
Sound	73 per cent
Addictiveness	80 per cent
Value	70 per cent

Domark's *Trivial Pursuit* is new, computer version of the cult board game. Three thousand questions are provided on tape or disc and the action is presided over by 'TP', a little cartoon character who asks the questions and keeps track of the score. The board display is a trifle cluttered, but on the whole it's a faithful copy of the original and just as taxing on the brain.

Graphics	75 per cent
Sound	75 per cent
Addictiveness	90 per cent
Value	60 per cent

POOLSWINNER

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years. The database updates automatically as results come in.
- **PREDICTS** Not just SCOREDRAWS, but ALWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **DISC/MICRODRIVE COMPATIBLE** Tapes supplied with conversion instructions.
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.



Boxed, with detailed instruction booklet

PRICE £15.00 (all inclusive)

NOW AVAILABLE

FIXGEN 86/7

AT LAST! No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish fixtures for 1986/7. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner. Yearly updates available. **POOLSWINNER with FIXGEN £16.50 (for both)**

COURSEWINNER v3

THE PUNTERS COMPUTER PROGRAM

You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc. It outputs most likely winners, good long odds bets, forecasts, tricast etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date.

PRICE £15.00 (all inclusive) includes Flat AND National Hunt versions.

NOT JUST A TIPSTER PROGRAM. Coursewinner V3 can be used by experts and occasional punters alike.

ALL PROGRAMS AVAILABLE FOR: AMSTRAD CPCs, AMSTRAD PCWs (ADD £3.00), All BBCs, All SPECTRUMS, COMMODORE 64/128, ATARI (48K+), SINCLAIR QL. Supplied on tape (simple conversion to disc) - except PCW (on 3" disc) and QL (on microdrive)

Send Cheques/POs for return of post service to...



phone 24 hrs

selec
SOFTWARE



phone 24 hrs

37 COUNCILLOR LANE, CHEADLE, CHESHIRE. ☎ 061-428 7425

(Send for full list of our software)

EPROMS * RAMS * DISKS

We only supply **NAMED, QUALITY** chips for the BBC

Lowest prices - Fastest delivery

Prices **INCLUDE** VAT and UK post, **normally by return**

NEC 2764C once only progr. 2-5 pcs £1.75, 6+ pcs £1.45

Fujitsu 2764-25	1-2 pcs £2.50,	3-9 pcs £2.25, 10+ pcs £2.15
Fujitsu 27128-25	1-2 pcs £3.35,	3-9 pcs £2.70, 10+ pcs £2.50
Fujitsu 27256-25	1-2 pcs £4.75,	3-9 pcs £4.50, 10+ pcs £4.30
Hitachi 27256-25	1-2 pcs £5.25,	3-9 pcs £5.00, 10+ pcs £4.75
Hit. 27C256-20/25	1-2 pcs £6.95	2-9 pcs £6.70, 10+ pcs £6.50
Hitachi 27512-25	1-2 pcs £14.50,	3-9 pcs £13.95, 10+ pcs £12.95

NB Hitachi have stopped supplying 21 volt Vpp EPROMs

Test show that 21 volt Vpp Fujitsus are **equally as good**
Hit. 6264LP15 ATPL, Watford 1-2 pcs £3.20 3+ pcs £2.85

NEC 41254/41464-15 (upgrading Solidisk) £6.00 each

Hit. 48416/NEC 41416 (=4416) (upgrading Watford) £2.50 each

NEC/Sam 41256-15 1-2 pcs £2.95, 3-9 pcs £2.60, 10+ £2.50

Intel 8271 controller £37.00

DISKS DS/DD 96 TPI. Hub-ring/Sleeve. Box of 10 £8.95

EPROM HARDWARE

SPECIAL OFFER Buy any of the products listed below and deduct 10% from your first order for EPROMs.

VersEprom low cost **EPROM PROGRAMMER** for BBC B, + and Master with DD and DFS.

Supplied in a cream coloured, sloping front case with ZIF socket, VersEprom plugs into and takes its power from the user port of the BBC. Software, which includes fast intelligent programming algorithm, is available in ROM.

VersEprom programs 2764, 27128, 27256, 27512/3 EPROMs, including "A" (12.5v Vpp) versions. Commands available are TEST, READ, BLOW, VIEW and COMP. Prices are:-

VersEprom £44.95 Software ROM £5.00

EPROM ERASERS handling up to 3 EPROMs at a time
D1 £21.45, D2 (with built-in 15 min timer) £26.45

Prices **INCLUDE** VAT and post, **normally BY RETURN**

Send UK cheques/PO

LA or Gov't Orders to:

SILICON CITY
Mithian, St. Agnes, Cornwall TR5 0QE

Access/Visa orders, telephone 087 255 2112

SINK THE BISMARCK

A WARGAME SIMULATING A MAJOR ACTION OF WORLD WAR II

'Sink The Bismarck' is the first of a new generation of wargames for the BBC Micro with a single disc-drive. The game is split into several sections, each of which is loaded as and when required by the main battle program. The game comprises some 40K of code, which still runs on a BBC B in hi-resolution graphics mode.

'Sink The Bismarck' is an accurate simulation of conditions in the North Atlantic in May 1941, including U-boats to harass your battleships, weather and fuel considerations, and troop and supply convoys which you must protect from the German battleship, which was regarded as the most powerful vessel afloat at the time. You have twelve British ships, each with their own strengths and weaknesses with which to scour the North Atlantic 1500 miles wide!

The program is compatible with the BBC B, B+64K, B+128K and MASTER 128 machines, and with the Acorn DFS, Watford DFS/DDFS, Opus DDOS, Solidisk DFS and the ADFS, and should be compatible with all other systems.

FOR BBC B with DISK

£10.99

plus £1.00p&p

Available from: Design People Software,
77 Grimwade Street, Ipswich, Suffolk
IP4 1LN or from good distributors.

NOW AVAILABLE FOR ELECTRON WITH 5" DISC

C & F ASSOCIATES

SELECTED BBC/ELECTRON PROGRAMS

BBC CASSETTE			BBC DISC		
TITLE	RRP	OUR PRICE	TITLE	RRP	OUR PRICE
Strykers Run.....	9.95	7.75	Strikers Run.....	11.95	10.95
Psycastris.....	7.95	6.75	Trivial Pursuit.....	19.95	17.50
Thrust.....	7.95	6.50	Mini Office 2.....	16.95	14.95
Mikie.....	6.95	6.95	Hyper Sports.....	12.95	10.95
Spy Hunter.....	9.95	7.75	Galaforce.....	11.95	10.95
Airwolf.....	9.95	7.50	Rick Hanson.....	11.95	10.45
Commando.....	9.95	7.50	Project Thesius.....	11.95	10.45
Yie Ar Kung Fu.....	9.95	7.50	Speech.....	11.95	10.45
Exploding Fist.....	9.95	7.50	Exploding Fist.....	14.95	12.95
Cosmic Battlezones.....	9.95	7.50	Yie Ar Kung Fu.....	12.95	10.95
Commonwealth Games.....	7.95	6.50	Citadel.....	11.95	10.45
Galaforce.....	9.95	7.50	Thrust.....	11.95	10.45
Moon Cresta.....	7.95	6.50	Scrabble.....	14.95	12.95
Bug Eyes 2.....	7.95	6.50	The Hobbit.....	17.95	15.95
Winter Olympics.....	7.95	6.50	Lord of the Rings.....	19.95	16.95
Jet Set Willy.....	7.95	6.50	Psycastris.....	11.95	10.95
Raid Over Moscow.....	9.95	7.75	Sink the Bismark.....	10.99	9.95
Project Thesius.....	9.95	7.95	Moon Cresta.....	9.95	7.50
Beach-Head.....	9.95	7.50	Olympic Decathlon.....	9.95	7.50
Trivial Pursuit.....	14.95	12.95	The Quill.....	22.95	19.95
Lord Of The Rings.....	15.95	12.95	Powerplay.....	14.95	12.95
Repton.....	9.95	7.50	Graphic Adv. Creator.....	27.95	22.95
Repton 2.....	9.95	7.50			
Speech.....	9.95	7.50			
Citadel.....	9.95	7.50			
Myorem.....	9.95	7.95			
Strike Force Harrier.....	9.95	7.50			
Karate Combat.....	8.95	6.95			
Phantom Combat.....	9.95	7.50			
Scrabble.....	12.95	10.95			
Death Star.....	9.95	7.50			
Price of Magic.....	9.95	7.50			
Worm in Paradise.....	9.95	7.50			
Southern Belle.....	7.95	6.50			

ELECTRON CASSETTE

ALL PRICES INCLUDE VAT AND POSTAGE & PACKING
(Overseas Orders add £1.00 per item)

Cheques/PO payable to:
C & F ASSOCIATES

AND SEND TO

C & F ASSOCIATES (AU) PO BOX 2 BIDEFORD EX39 3RE
Tel: (023 73) 619

Orders normally dispatched within 24 hours of receipt
but allow a maximum of 7 days

REVIEWS

GAMES

The first karate/kung fu type game on the BBC micro was *The Way of the Exploding Fist* from Melbourne House, and in my opinion it's the best. It survived conversion from the Commodore 64 well and provides either one or two player options. Please note, you have to be dextrous to play, as eight keys are used plus a 'kick' key, giving in total 18 different moves! (And the keys are reversed when you turn round!)

Graphics	87 per cent
Sound	80 per cent
Addictiveness	80 per cent
Value	80 per cent

Repton 2 is the second (surprise, surprise) in the *Repton* family. Its predecessor sold like hot cakes when it was released and rightly so, the graphics are excellent, the action fast and the whole game totally addictive. *Repton 2* followed on with a larger playing area, more puzzles and greater complexity, although it's slower.

Graphics	80 per cent
Sound	75 per cent
Addictiveness	70 per cent
Value	80 per cent

There haven't been too many shoot 'em up games recently, because they now need to be of a very high quality to sell at all, but *Galaforce* is one of the better ones and lives up to the usual Superior high standard. It contains very pretty, high-speed sprites, excellent sound effects and interesting attack formations.

Graphics	85 per cent
Sound	90 per cent
Addictiveness	75 per cent
Value	80 per cent

Of the adventures, *Bored of the Rings*, *Terrormolinos* and *Hampstead* have plenty of humour, and I highly recommend all Level 9 adventures for their depth, descriptions, puzzles and complexity.

And now for the bit you've been waiting for ... the Golden Turkey award:

Which game had the biggest hype?

Which obtained rights from the BBC to use one of its characters?

Which made you take the top off your Beeb so you could play it?

Which featured a programmable cat?

Which featured the word 'terror', which could easily have been replaced with the word 'boredom'?


Answers on a post card to ...




Boffin: great graphics for a ladder and platform type of game




Tapper: hectic action serving customers

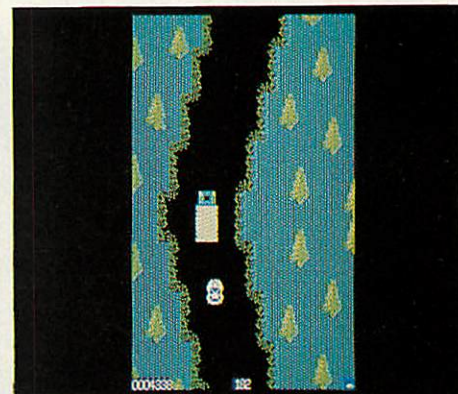

Spy Hunter: shoot-'em-up whilst driving

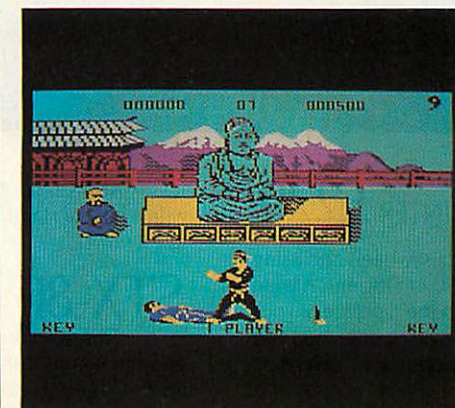

The Way of the Exploding Fist: dexterity needed

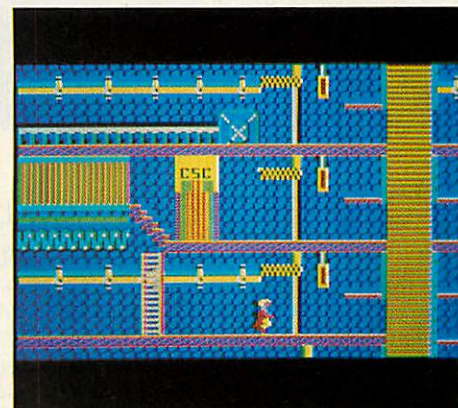

The Golden Turkey Award goes to this effort

REVIEWS

GAMES


TOP TITLES

Electron round-up: Bernard Emblem picks the best from an expanding choice

1986 hasn't seen any major breakthroughs in game design, at least as far as the Electron is concerned, but we have seen some realistically priced re-releases, a few long awaited conversions, some excellent compilations, and one or two originals destined to become classics.

This year has seen the emergence of Superior Software as the leading source of new Electron games, a position recently enshrined in a partnership deal struck with former rivals Acornsoft, who found themselves victims of the Olivetti takeover. Acornsoft will be offering advice and their prestigious logo to Superior's new releases.

Other software houses to have made an impact during the year include several who have at last seen the potential of budget games for the Electron. Micropower have

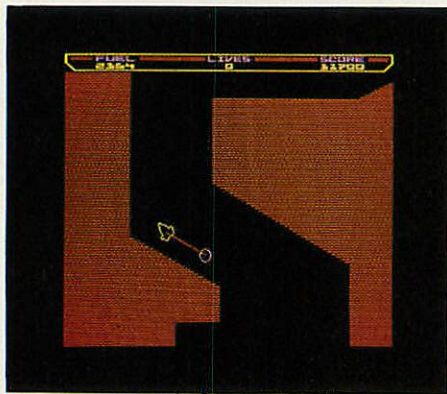

Thrust: popularity through quality

re-released classics at less than half their original price, while Bug Byte and Mastertronic have dominated the £1.99 and £2.99 markets respectively, with a mixture of the old and the new, good and bad – but


always cheap. A policy of 'never mind the quality, look at the price' may seem a little dubious, but it works.

Interestingly, these budget games haven't made any noticeable impact in the BBC micro games market.

The games chosen for my Top 10 were all released during 1986, or are older games still selling well. Rather than just select the games I've enjoyed most, I've tried to produce a balanced selection of game types, and value for money as an important criterion. The younger players have been taken into account too.

Model B owners will be pleased to know that all the games chosen are also available for their machine, or will run unaltered – occasionally better than on the Electron, sometimes ridiculously fast!

We're standing printer

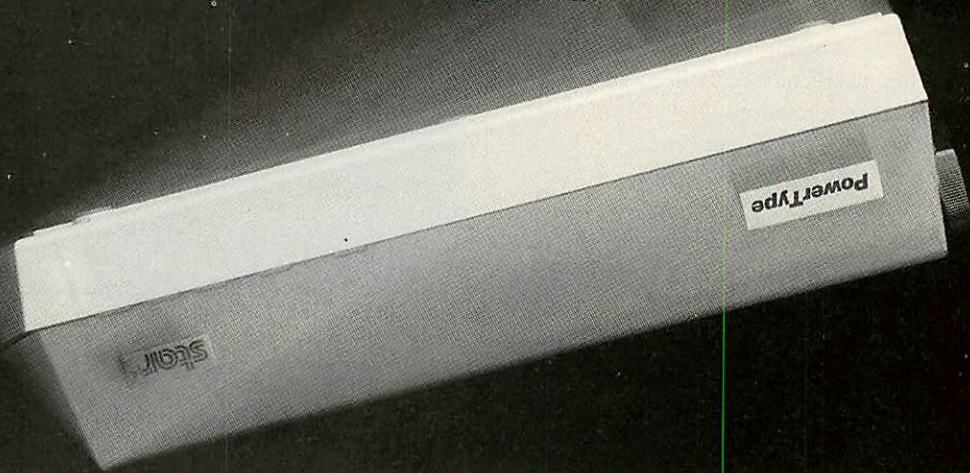

PowerType DAISYWHEEL PRINTER £229

With over 100 type fonts on widely available daisywheels and using standard ribbon cassettes, PowerType is remarkably cost efficient. A wide carriage giving up to 165 columns of beautiful print in the typeface of your choice, even a graphics capability, the flexibility of reverse paper feed and 18 characters per second means swift, classic correspondence. PowerType comes with Parallel and Serial interfaces as standard.

A&B Computing said in July that Powertype was a quality printer with a host of standard features, excellent value at £400 – How would they rate it now?!

STX-80 THERMAL PRINTER £79

This quiet and efficient machine prints at 60 characters per second and the compact thermal printhead, designed for dependable performance, will give you a lifetime service of 20 million characters.

Top Ten 1985/6


1 <i>Thrust</i>	Superior Software
2 <i>Cavemen Capers</i>	Aardvark
3 <i>Frak!</i>	ASL
4 <i>Bug Eyes 2</i>	ASL
5 <i>Repton 2</i>	Superior Software
6 <i>Twin Kingdom Valley</i>	Bug Byte
7 <i>Treasure Hunt</i>	Macsen
8 <i>Citadel</i>	Superior Software
9 <i>Computer Hits 10</i>	Beau Jolly
10 <i>Action Pack 2</i>	WH Smith/Alligata

My Game of the Year is *Thrust* (Superior Software, £7.95) a game with all the hallmarks of an arcade classic – wonderful keyboard response, the most convincing representation of gravity I've ever seen and – perhaps best of all – it's perfectly judged as a game. *Thrust* has 24 levels, each with the same theme – fly a rocket down to collect a pod from a planet. Level One is soon mastered, as the pod is protected by a single limpet gun, which experienced players can destroy with a single shot. On further levels things are naturally a good deal more difficult, with pods buried round corners, and deep beneath the planets' surfaces. It's a truly wonderful game.

Graphics: 90 per cent
Sound: 70 per cent
Addictiveness: 90 per cent
Value: 90 per cent

For family entertainment, two games have shared the honours in the Emblem household this year.

The first is *Cavemen Capers*, (£7.95

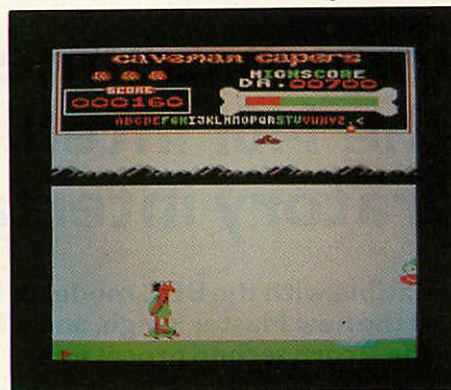

Cavemen Capers: youngsters' favourite


from Aardvark), a game I didn't take to at first, as the graphics, and the plot – jumping over and dodging under endless obstacles – are rather uninspired. But soon I realised that other people, particularly the

younger members of the family, loved it. It has the virtue of being very simple to play – the initial obstacles can be negotiated using just the jump key – and though it soon requires careful positioning before jumping, it remained a firm favourite with the little 'uns.

Graphics: 50 per cent
Sound: 40 per cent
Addictiveness: 70 per cent
Value: 70 per cent

I've selected *Frak!* for more family fun, (£7.95 from ASL). This version of one of 1985's best seller for the BBC micro is every bit as good as the original. It's a game with lots of novel features, designed to appeal to all styles of players. The game involves getting from one side of a series of obstacles to the other, on each of several screens, each screen involves several sideways scrolls. *Frak!* has a wonderfully smooth feel, with jumps and falls very true to life, and addictive sound effects. The most attractive feature for some players is the design your own screen feature. These DIY screens can then be saved on tape and used again. A very classy game.

prices on their heads.

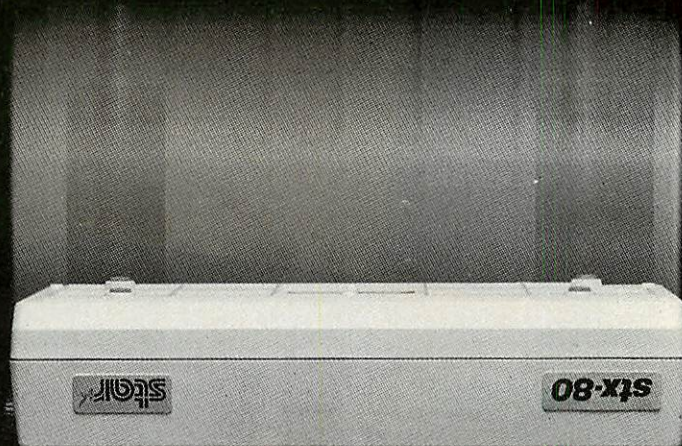

The STX-80 has a carriage width of 80 columns, graphics and many of the features of much larger printers. It's so quiet, the only thing that will make you shout is the price!

PowerType and STX are part of a range of exceptional quality printers – With prices this good, you'll go head over heels for a STAR!

Ring – 0272 217777
for more information
(24 hour manned switchboard).

star

For more information and the address of your local dealer complete the coupon and send it to Star Micronics U.K. Ltd. Craven House, 40 Uxbridge Road, London W5 2BS.

Name _____

Address _____

LABORATORY WORKSTATION FOR YOUR COMPUTER


Professional instrumentation with the I40I intelligent laboratory interface

Compatible with the BBC model B, B+
and the new Master range, and all
the Acorn second processors.

- Full 12 bit analogue input and output
- Up to 2 Mbytes of internal memory
 - Multi-tasking operation
 - Full laboratory software –
including FFTs – is included
- Application programs including Spectrum
Analyser, Signal Averager, PSTH and INTH.

Designed and made in Cambridge, England

It runs just as fast with the Apple,
Apricot, HP, IBM or Nimbus too!

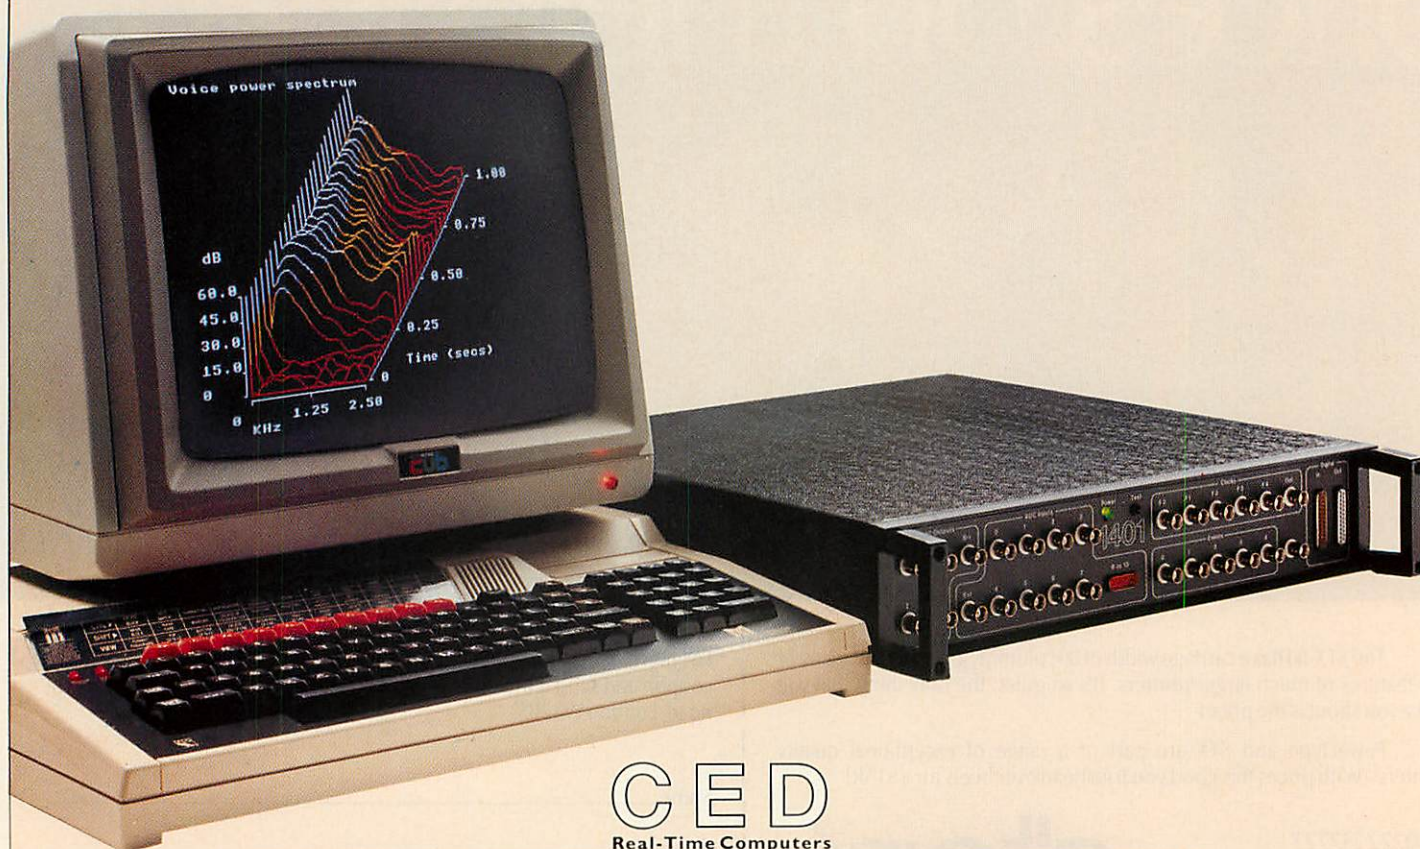

CED
Real-Time Computers

Science Park, Milton Road, Cambridge CB4 4FE. Tel Cambridge (0223) 316186

REVIEWS

GAMES

Graphics: 90 per cent
Sound: 90 per cent
Addictiveness: 80 per cent
Value: 80 per cent

Second versions of classics often sell well on the strength of the original – but soon prove disappointing. Two exceptions to this rule, *Bug Eyes 2* from ASL (£7.90) and *Repton 2* from Superior (£9.95), are games with that addictive quality that keeps you up at nights.

Bug Eyes 2 is a game with lots of humour and plenty of surprises, as you wander round the supposedly deserted shell of a huge spaceship, collecting keys and avoiding such hazards as flickering flames, snapping scissors, swishing swords and disappearing floors with plenty of nasty creatures, including an interloper or two from other games. It's the game played most in our house this year, and though I've never finished it, I have seen it done, which is always an encouragement.


Graphics: 80 per cent
Sound: 60 per cent
Addictiveness: 90 per cent
Value: 80 per cent

Repton 2 featured high in last year's charts, and it's remained a best seller throughout this year, becoming Superior's second best seller of 1986. I haven't had *Repton 2* long enough to get addicted, but I'm in no doubt that it has all the necessary qualities, and much of the humour of *Bug Eyes 2*. The plot is a similar and familiar one – collecting all sorts of things on each of a variety of interconnected screens. The Electron version features a smaller screen than the BBC micro version, but the game is almost as playable, my only complaint being that scrolling sometimes can be a little jumpy.

Graphics: 90 per cent
Sound: 50 per cent
Addictiveness: 80 per cent
Value: 70 per cent

For adventure fans, I've included three very different implementations of the adventure theme. First, and cheapest, is the best budget game I've played this year – Bug Byte's *Twin Kingdom Valley* (£2.99), a traditional adventure involving fighting your way through 175 illustrated locations while contending with 35 rather unfriendly creatures. Though I cannot recommend it unreservedly – mainly because of the

inability to restart a game without reloading the whole thing – it's a very sophisticated program, offering a choice of screen display, including graphics which actually

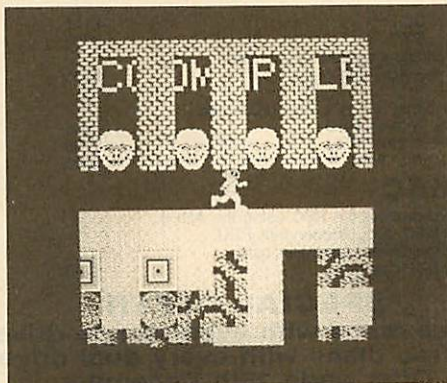


Repton 2: consistent seller for two years

help you play the game better. Very good value for money.

Graphics: 70 per cent
Sound: 70 per cent
Addictiveness: 70 per cent
Value: 90 per cent

Another thought provoking offering is *Treasure Hunt* (£9.95 from Macsen), one

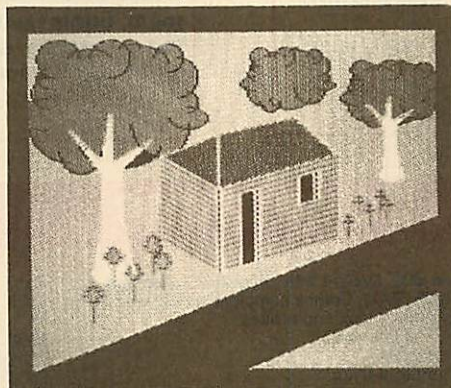

Twin Kingdom Valley: best budget adventure

of a number of games based on popular TV series produced in collaboration with independent TV companies. This is an adventure game with a difference, involving searching for and solving cryptic clues in real locations shown on an on-screen map. It comes complete with a booklet of extracts from real guide books, and keen players can purchase supplementary data packs, to allow exploration of other UK locations. *Treasure Hunt* scores in originality, and its professional presentation.

Graphics: 60 per cent
Sound: N/A
Addictiveness: 70 per cent
Value: 70 per cent

Finally for adventurers, there's *Citadel*, another from Superior, at £9.95, and one of the most sophisticated games ever produced for the Electron. *Citadel* deserves inclusion because of the vastness of its map and the quality of its puzzles. It's a true arcade adventure, in which each of 100 screens involves arcade puzzles to be solved, often while under attack from a variety of nasties.

One of my pet hates is games which are too easy or too hard. We haven't been playing *Citadel* long enough to have got very far, but I'm impressed with the way the game starts fairly simply, with new players and youngsters able to make some progress before the really difficult problems present themselves.

Graphics: 90 per cent
Sound: 50 per cent
Addictiveness: 80 per cent
Value: 70 per cent

Finally, and particularly for new owners and those counting the pennies, let me recommend two compilations – *Computer Hits 10* from Beau Jolly at £9.95, and *Action Pack 2* from WH Smith/Alligata at only £4.99.

Computer Hits 10 features a mixed bag of oldies, not all of which could have been hits on the Electron, I'm sure, but it includes enough quality games to remain good value for money. Highlights are *Chukkie Egg*, *Guardian*, *Ghouls*, *Killer Gorilla*, and *Eddie Kidd's Jump Challenge*.

Graphics: N/A
Sound: N/A
Addictiveness: N/A
Value: 90 per cent

Action Pack 2 contains four high quality versions of standard arcade types – *Video's Revenge* (shoot everything that moves), *Q-Bix* (standard Q-Bert), *Tarzan Boy* (swing from tree to tree), and *Diamond Pete* (*Repton 2* for the fainthearted!).

Graphics: N/A
Sound: N/A
Addictiveness: N/A
Value: 90 per cent

The outlook for 1987? With Electron versions of games now frequently selling better than BBC micro versions, I predict a reduction in prices, more conversions and compilations, more games available on disc, and the use of double sided Electron/BBC micro tapes as standard.

DISC DRIVES

Mitsubishi 5.25" 2 year manufacturer's guarantee 40/80 switchable (switch at front of unit)

WITHOUT PSU

	exc. VAT	inc. VAT
Single 400k DS	£96	£110.40
Dual 800k DS	£183	£210.45

WITH PSU

	exc. VAT	inc. VAT
Single 400k DS	£112	£128.80
Dual 800k DS	£205	£235.75
Dual 800k horizontally mounted in a monitor stand. Fits both the BBC and Master series.	£235	£270.25

Low cost 5.25" Hoshin drives 1 year guarantee

	exc. VAT	inc. VAT
Single 400k DS Without PSU	£85	£97.75
Dual 800k DS Without PSU	£168	£193.20
Single 400k DS With PSU	£101	£116.15

MEGADISC

A 20Mb byte hard disc for the BBC using the ADFS. Includes 20Mb hard disc, independent PSU and cooling fan, winchester controller card and BBC host adaptor card.

£499	£573.85
------	---------

SPECIAL OFFER

5 free discs with every single drive
10 free discs with every dual drive
Offer ends 15th December



PRINTERS

	exc. VAT	inc. VAT
Star NL10 30cps NLQ 120cps Draft	£225	£258.75
Taxan KP810 30cps NLQ 140cps Draft	£214	£246.10
Shinwa CP80A 100cps Draft	£160	£184.00
Epson LX86 28cps NLQ 120cps Draft	£225	£258.75
Juki 6100 Daisywheel	£240	£276.00
(SPECIAL OFFER)		
Quendata 1120 Daisywheel	£140	£161.00
(includes space ribbon north £7)		

MONITORS

	exc. VAT	inc. VAT
Phillips 8533 medium resolution colour	£249	£286.35
Phillips Monochrome green, anti-glare	£69	£79.35
Taxan Supervision III high resolution colour	£315	£362.25
Microvitec 1451 med res colour	£230	£264.50
Mitsubishi 1404 medium res	£210	£241.50

IDEAL CHRISTMAS PRESENT

Phillips TV/Monitor. Gives true monitor performance but with 10 pre-select TV channels.

£172	£197.80
------	---------

COMPUTERS

Master 'Compact' New BBC system with integral 3.5" disc and separate keyboard. 128K RAM. Comes complete with a wide range of software. View, Logotron, Desk Top utilities.

	exc. VAT	inc. VAT
Base unit (computer + single drive)	£385	£442.74
Base unit + UHF modulator	£395	£454.25
Base unit + monochrome monitor	£465	£534.75
Base unit + colour monitor	£595	£684.25
Second 3.5" disc unit	£100	£115.00
BBC MASTER 128K with VIEW and other free software	£390	£448.50
BBC+ 64K (price subject to availability)	£350	£402.50

WORD PROCESSING PACKAGE

MASTER 128 with View and Viewsheets, Dual 800K disc drive, high res green screen, monitor and Quendata daisywheel printer. Complete with paper, discs and leads

MASTER COMPACT with view, single drive, colour monitor, daisywheel printer	£787	£905.05
	£705	£810.75

SPECIAL LATE NIGHT LINE

We have opened a special evening enquiry and order telephone line from 5.30pm to 9.00 every evening.

PHONE AT YOUR LEISURE: 02774 55076

MAIL ORDER

Goods despatched within 24 hours.

Discounts available for quantity purchases.

Large selection of educational and business software.

Educational and official orders welcome.

Export orders welcome.

Prices correct at time of going to press.



REVIEWS

H A R D W A R E

MICRO MUSIC

David Johnson-Davies looks at Music 5000, a versatile composition and synthesis system

The first thing that most people would expect from a music system running on a computer is a graphical display of a musical staff, and an editor which allows you to enter music on the staff and play it. Hybrid's original Music 500 system, released two years ago and marketed by Acorn for the BBC micro, was undoubtedly a sophisticated piece of hardware but at the time it surprised and even shocked people that the only means of entering, editing, and playing music on the system was a programming language called Ample. The expected graphical display of music on conventional notation was missing.

The Music 5000 is Hybrid Technology's evolution of the Music 500; it uses substantially the same hardware, containing 16 independent note generators, and using multipliers to provide software control of the amplitude, envelope, and stereo position of each generator. It comes in a disc-drive sized unit which plugs into the BBC micro or Master's 1 MHz bus, and gives an output for a stereo amplifier. The main hardware difference from its predecessor is a modification to ensure it works correctly with a Master computer.

The software, however, has been considerably developed by Hybrid, and it is this that really makes it necessary to take an entirely fresh look at the 5000. The main additions are a real-time *Mixing Desk*, that allows you to alter the mix of a piece while it is playing, and a graphical *Staff Editor*, with facilities similar to other graphical music editing programs. The concept of a graphical editor is not new; most music programs provide this as the means of entering and editing music. The important difference is that the Music 5000 software retains Ample as the internal representation, and provides access to this representation if you want to work with the music in ways that are beyond the



limits and capabilities of the Music 5000 *Mixing Desk* or *Staff Editor*.

There are two reasons why it is beneficial to have access to a more fundamental representation of the music. First, even if staff notation provides a good way of transcribing music, is not necessarily the best notation in which to compose or explore music. For one thing, its linear representation makes it hard to build structure into a composition. Second, it does not provide a good way of representing how music should be played; in fact modern composers usually supplement their musical works scores with lengthy written instructions and explanations.

What Hybrid have evolved over the past few years is a compact, efficient, programming language, Ample, which is ideally suited to representing aspects of music of interest to composers.

With the *Staff Editor* in the Music 5000 system, a graphical front-end has been provided which provides beginners with a bridge between music notation and the program language representation. After experimenting with the system, it is clear that this gives the best of both worlds; music can be entered and edited in staff notation if that is what you are familiar working with, but as soon as the limits of staff notation start to interfere with what you are trying to achieve, you can revert to the

flexibility of programming in the language Ample.

The Music 5000 software consists of the *Ample Interpreter*, which has itself been considerably extended and now comes in a 16k ROM, and three front-end editors supplied on disc, themselves written in Ample. The *Staff Editor*, already described, allows music to be entered in conventional music notation and converted to Ample. The *Notepad* is a screen-editor, which provides a convenient way of editing Ample words, and has special facilities for editing instru-

ment definitions using pop-down menus of the available envelopes and waveforms. The *Mixing Desk* allows pieces in several parts to be mixed, as in a studio. The package is supplied with impressive demonstration pieces which can be analysed for technique.

As an example of how all the components of the Music 5000 system are used together, consider the process of building the line of music shown in figure 1 into a complete composition.

First, the music is typed into the *Staff Editor*. The position after typing in two bars is shown in figure 2, the whole piece as represented across several *Staff Editor* screens is shown in figure 1.

The *Staff Editor* gives a graphical display of a musical stave, with treble and bass clef, onto which you can type music in roughly the same way as you would write it onto a page. For example, to enter a dotted crotchet at middle C you press Return to get a note, alter its duration with Shift → or ← until it becomes a crotchet, slide it up and down the stave lines with Shift ↑ and ↓ to the correct position, and then type Return again to enter it. Finally, just type '.' to make it a dotted note. If you want a note to be sharp or flat, you press the + or - key before entering the note, and a sharp or flat symbol appears in front of the note, as on the sheet music representation. One

REVIEWS

HARDWARE

feature of the editor which particularly impressed me was its handling of chords; you simply type in the component notes, one after the other, to give an exploded version of the chord, (see figure 1). In some other music editors you have to separate a tune containing chords into several parts and enter them individually; this is cumbersome, and small mistakes can make it very difficult to align the parts.

Other features include transposition, allowing you to enter notes beyond the range of the staves, ties or slurs between notes, triplets (three notes adding up to two normal ones) and duplets, dots and double dots, rests, changes of dynamics, time signatures and bar lines – which together check that you have entered the correct note lengths. The editor allows you to scroll backwards and forwards along the music, and the editing features include a block copy, allowing you to duplicate a sets of notes.

Once entered the tune can be played back immediately, complete with chords, unlike some other programs which only allow you to play one part at a time without transferring to a separate program. The only obvious limitation is that each bar is not displayed as it is being played, perhaps this is not surprising given the processing overheads it would cause.

As you enter and edit music in the *Staff Editor*, it is actually stored internally in Ample notation. The close relationship between the *Staff Editor* and Ample is highlighted by the facility allowing sections of Ample program to be written above the staff, between two sections of music, to alter the way that the music is played. For example, in the penultimate bar of the example of figure 1, the pre-defined word 'Len' is used to set a gap between notes to give them a staccato quality. The *Staff Editor* 'Make' command displays the Am-

ple equivalent of the piece, and makes it into a defined word.

The word definition for 'part1' made from the *Staff Editor* tune of figure 1 is shown in figure 3, loaded into the *Notepad*. This then gives the Ample equivalent of the entered tune.

One feature contributing to the compactness of Ample notation is the fact that



Figure 2. The Staff Editor with two bars entered

the characteristics of the music, such as the tempo, amplitude, playing style, instrument, or note length, are stored not as attributes of every note as in some systems, but as changes only when they occur within the music. This makes the notation easy to read, and it should be clear from the following how figure 3 corresponds to the first few bars in figure 1.

The symbol '|' separates bars, and the letters A to G correspond to the notes of the scale, capitals give ascending notes, lower-case descending notes. Brackets enclose subsequent notes of a chord, thus the first chord of the second bar is written 'A(aec)'. Rests denoted by ↑ give a unit of silence, whereas the '/' symbol leaves a note playing for a further unit of time. The values '6,' and '12,' set the lengths of subsequent notes, and an instruction such as '0:' sets the octave.

Finally, a complete tune is created by

defining a word 'Run' which lists all the parts to be combined. For example, we could add a percussion part called 'part2' which would be played by a different player concurrently with the piano part.

The music can then be loaded into the *Mixing Desk*, as shown in figure 4. This is an ingenious and intriguing program, rather like a studio desk. Once you have set an Ample program running, playing a piece of music, you can run the *Mixing Desk* as a concurrent task to alter the parameters of the music, as it is playing.

As on a studio desk you can alter the level of each voice, its stereo position, the tempo, and you can fast-forward through the music. You can also do something that no studio can do; while the piece is playing you can alter the instrument that a particular voice is using, or that all voices assigned to one player are using; in the example

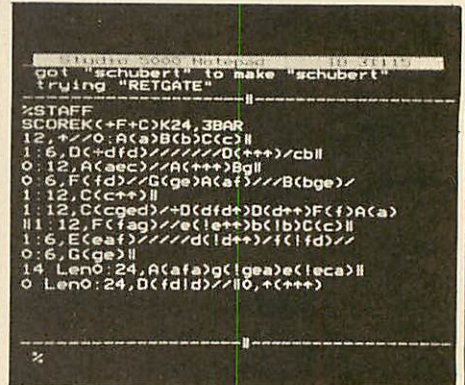


Figure 3. Ample version of the Notepad piece

they are all 'Upright', the piano sound. A library of pre-defined instruments is supplied with the system, and these can be edited, or new ones defined, using the *Notepad* section.

As with the *Staff Editor*, the *Mixing Desk* settings can be converted to a standard Ample word definition – in this case 'mix' – and embedded permanently in the definition of the piece of music you are

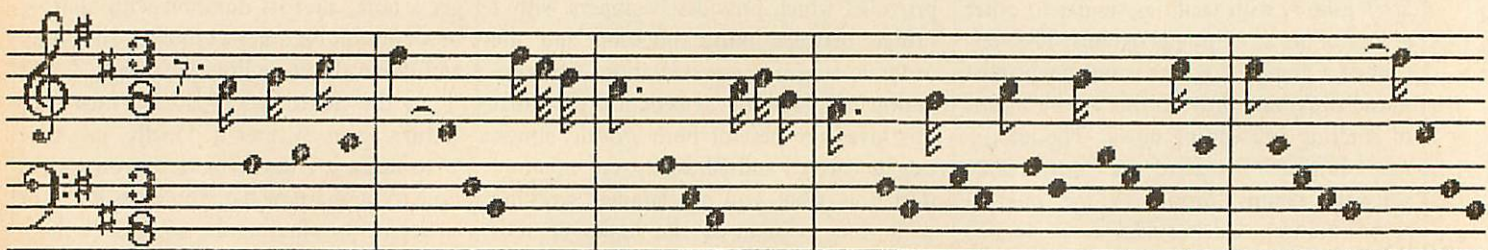


Figure 1. An edited sample of music using the Music 5000 system

REVIEWS

H A R D W A R E

creating. To examine and edit the mix definition it can alternatively be loaded into the *Notepad*, see figure 5.

Several sample pieces are supplied with the Music 5000 software, and so before you even come to terms with writing music you can have a fascinating time playing with the *Mixing Desk* using these.

Whereas the *Staff Editor* provides a convenient way of entering existing music, for composing music Ample's superiority soon becomes apparent. Music often contains structures and patterns that are obscured by staff notation. For example, the structure might be the repetition of the same sequence of notes in different parts. In conventional notation the repeated phrase would usually have to be written out each time. If a piece consists of essentially the same theme transposed, or inverted, as in a fugue, then it requires quite advanced decoding skills to extract the structure that was originally in the composer's mind, from the transcription of the music into a written score.

The structure can be preserved in an Ample program, which as a result is a comprehensive and compact representation of the piece of music, even if it is not what we are used to seeing.

The fact that underneath the niceties of the *Staff Editor* and *Mixing Desk* is a fully-fledged programming language means that you can call on the programming facilities in a piece of music, should you have to. As a simple example, you could specify that one part in a piece of music consisted of four chords, played randomly. Unfortunately only the words needed for musical composition are defined in the User Guide, but a Programmer's Guide will be available separately and will be essential for experiment.

Anyone who has tried writing multi-part music in BBC Basic will soon have realised

that a full music system needs to be able to execute several programs concurrently. Ample's whole design is based on concurrency, and several new words included in the ROM version of Ample supplied with the Music 5000 streamline the playing of multi-part music. For example, the Play word allows you to play several parts simultaneously, with optional repetitions.

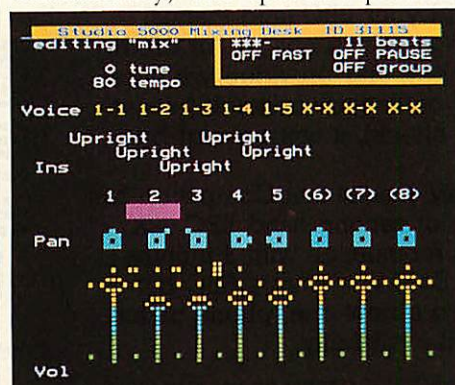


Figure 4. The ingenious Mixing Desk

Suppose you have defined the three separate parts of a piece of music, which might correspond to piano, flute, and percussion, as 'part1', 'part2', and 'part3' respectively; then typing:

"123" PLAY

gets all three programs running simultaneously. Ample calls the tasks that run each program 'players', by analogy with the members of a band or orchestra. In this example the player of the piano part would be assigned four voices so that chords of up to four notes could be played. The other players would need one voice each. The words defining each part, 'part1', 'part2', and 'part3', could have been written separately using the *Staff Editor*.

Another area that is substantially improved over the earlier version of Ample used on the Music 500 is the design of instruments, and the assignment of channels to them. Now instruments can be

mixed quite freely, each claiming channels automatically as it needs them.

The problems of programming directly in Ample made me hesitate before recommending Hybrid's previous product, the Music 500, to anyone without a fair amount of previous programming experience. The additional software provided in the new Music 5000 package has overcome this criticism, without reducing the power and flexibility of the system, and I would recommend it to anyone who is interested in composing music, or experimenting with the construction of existing music, either with or without prior musical training. The whole system costs £161 including VAT through Peartree and existing owners of the Music 500 are catered for by an upgrade pack, available from Hybrid for £69 including VAT.

Perhaps the most exciting possibilities


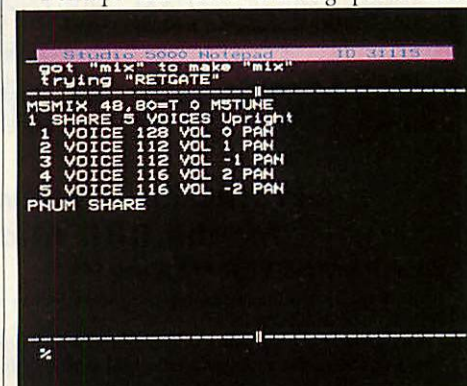


Figure 5. After mixing, Notepad representation

for the use of the system are in education. The Ample language certainly places fewer constraints on creativity than conventional musical notation, and I hope that children are given the opportunity to use Ample as part of the process of learning about music.

'Music 5000', Peartree Computers Ltd, St George's House, 14 George Street, Huntingdon, Cambs, PE18 6BD, Tel: (0480) 50595, BBC B, B+, Master 128, £161.

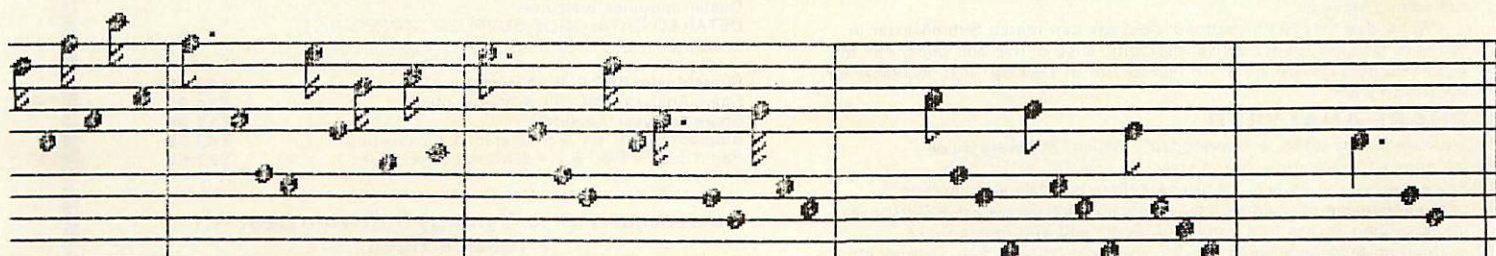

PART EXCHANGE YOUR BBC FOR ANYTHING WE CARRY IN STOCK



AMSTRAD	
PC1512SD	£458.85
PC1512DD	£573.85
BBC MASTER 128	£449.00
TURBO UPGRADE.....	£125.00
WRITE PROTECT SWITCH FOR MASTER.....	£9.95
CUMANA DISK SYSTEMS	
CSX100L	£79.95
CSX400S	£125.35
CS100	£102.35
CS400	£159.85
CD200	£188.60
CD800S	£251.85
PRINTERS	
KAGA KP810	£263.35
CANON PW1080A	£286.35
PJ1080A	£458.85
EPSON LX80	£217.35
JUKI 6100	£251.85
6200	£516.35
MONITORS	
MICROVITEC	
1431	£193.20
1451	£251.85
1431AO	£251.85
1451AP	£286.35
KAGA/TAXAN 12"	£113.85
PHILIPS 12"	£90.85

We will accept your BBC computer, any age, any condition, even non-working, in part exchange for any product we normally hold in stock. This offer applies to both BBC products and Amstrad computers.

A selection from our product range is shown here, and as you can see, our prices are very competitive. The allowance you can expect for your machine is detailed in the table opposite.

Just send your BBC (and manual please) to us with a cheque or credit card number, and provided we have the item you require in stock (please phone to check), it will be sent by return.

This offer means that Compshop has a number of second hand BBC 32K machines for sale, all with 3 months warranty. So if you want a BBC but can't afford a new one, phone us for prices and availability.

ALL PRICES
INCLUDE VAT

CARRIAGE ON ANY ITEM
POST — £3.00 COURIER — £10.00

ALLOWANCE ON YOUR OLD MACHINE

	MORE THAN TWO YEARS OLD	TWO OR LESS YEARS OLD
WITHOUT ACORN DISK INTERFACE	£125	£175
WITH ACORN DISK INTERFACE	£175	£225

PLEASE DEDUCT £25 IF YOUR BBC HAS ANY FAULTS

COMP SHOP PRICE PROMISE
— We guarantee to match the price on equipment offered from stock through any other supplier.

Educational enquiries and orders welcome.

Quotations given.

One year warranty on all products.

COMP SHOP was established in 1978 and has continually offered the best in micro computers to discerning customers.

We sell only computers and peripherals, and therefore can offer the support many other shops cannot.



14 Station Road, New Barnet, Hertfordshire, EN5 1QW
(Close to New Barnet BR Station - Moorgate Line)

Telephone: 01-441 2922 (Sales) 01-449 6596 Telex: 298755 TELCOM G
OPEN (BARNET) - 10am - 7pm - Monday to Saturday

NEW BRANCH OPEN AT:

311 London Rd., Camberley, Surrey GU15 3HE
Telephone (0276) 22677

Synergy Software

Professional Software for the BBC Micro

SHAREMASTER *** New ***

ShareMaster is the ultimate integrated investment analyst and reporting system for the BBC Micro.

Designed for the small and professional investor, ShareMaster is the most powerful tool available for predicting the mood and direction of the stockmarket and analysing investment performance. ShareMaster can analyse share prices, currencies, traded options, commodities or any other time based series by a variety of comparative, statistical and analytical measures.

Price information can be entered on a daily or weekly basis and the package supports full date and decimal handling.

Charting facilities include log/lin graphs, point & figure, linear regression, exponential curve smoothing, correlation, six types of comparison, momentum, RSI oscillators, moving averages, highs, lows, trendlines, two size Epson compatible screendumps etc.

Profit Analysis facilities include Valuation, Performance, Share and Portfolio Profit analyses etc.

Numerical analysis facilities include key charting indicators, Ratios and general price statistics for any chosen price range.

ShareMaster has extensive reporting, database and file management features including Company Profile, transaction reporting, file import & full editing facilities.

We believe that NO investment package can match ShareMaster in terms of facilities, performance, flexibility, ease of use and price. Ask for our FREE detailed brochure. An investment at **£99.95**. Also available for Amstrad PCW.

SHARE ANALYSER

'excellent... very highly recommended' — Which? Software Guide

'an excellent program' — Micro User

Share Analyser is an easy to use reporting, analysis and charting package capable of maintaining Transaction and Share Price Databases and providing access to a variety of report and analysis facilities.

Charting facilities include Moving Averages, Rise & Fall, Overlay etc.
Superb value at £24.95



BIOGRAM

'Biogram provides the user with a very cheap near equivalent to a professional system costing many times its purchase price' A&B Computing. 'ingenious package...' Acorn User 'good value for money' Micro User.

Biogram is an electronic stress management system designed to teach self awareness and relaxation techniques.

The Biogram software has extensive facilities for relaxation training, lie detection and phobia reduction and includes an electronic biofeedback detection module.



RAPID READER

'Synergy's previous programs have been characterised by originality, practical application and high quality of program design and documentation. There is every indication that Rapid Reader lives up to this high standard' A&B Computing.

Rapid Reader is a powerful and flexible reading improvement package incorporating a self contained, 48 lesson speed reading training course.

ORDER FORM

(State 40 or 80 track disk). Orders despatched within 24 hrs. Prices include VAT and first class p&p. Overseas orders send full price for airmail despatch. Cheque, Access, Visa and official educational orders accepted. Dealer enquiries welcome. DETAILED CATALOGUE SUPPLIED ON REQUEST.

ShareMaster BBC B, B+ Master (disk)	£99.95
Share Analyser BBC, B+ & Master (disk)	£24.95
Share Analyser (cassette)	£17.95
Biogram BBC B, B+ & Master (disk & cassette)	£49.95
Rapid Reader BBC B, B+ & Master (disk only)	£27.95

Send cheque, P.O. to: **Synergy Software Dept AU**
7 Hillside Road,
Harpenden, Herts AL5 4BS. (05827 2977).

If you own a BBC Micro, Commodore 64 or Spectrum 48k/128k - you could have a totally automated home at your command.

It's time your computer grew up and realised its full potential - as something more than a data base, a word-processor or an expensive toy for your kids. From now on, your home computer can do a lot more than play games.

The Red Boxes control system lets your computer earn its keep defending your home against intruders, acting as a round-the-clock security system, giving you control over any electrical appliance whether you are in, or out.

The Red Box starter system takes you right into the exciting world of home automation from as little as £129.

Just plug in for a more efficient home.

Simple to operate, it plugs straight into your home's ring main and needs no other wiring. You don't need any programming experience to operate it.

The system can control internal and external lighting, on/off switches and dimmers in different rooms in different sequence. It can activate washing machines, tumble driers, dishwashers, hi-fi, television, heaters - in fact, everything operating through your mains via a 13 amp plug.

Prevent daylight robberies.

Most burglaries happen during the day, so the Red Boxes control system works just as hard then as it does at night.

If an intruder enters your home, the Red Boxes control system will see him off sharply.

As soon as its sensor is disturbed, the alarm will raise the roof.

However, more importantly this system can also deter people entering your home by creating an appearance of constant activity.

Turn your home computer into a command terminal.

The Red Box starter system comprises three red boxes.

RED LEADER is a complete 6502 based microcomputer with 16 kbytes ROM, 8 kbytes RAM, peripheral controller with 2400 baud mains modem and host computer link, with an integrated power supply. Its powerful micro-processors turn your micro-computer into a command terminal. This is the heart of the system - its even sophisticated enough to recognise which type of computer you own!

RED ONE is a micro-processor controlled 13 amp mains outlet working under the supervision of Red Leader. With Red One at a socket you have power over domestic appliances and lights connected to that outlet.


RED TWO is a complete micro-processor controlled movement detector which feeds back data to Red Leader via mains borne signals - raising the alarm on intruders as soon as they enter its heat seeking zone.

Unique tamper-proof security.

Our Red Boxes operate a secure communications protocol. Incorporating tamper-proof PIN codes. All 'slaves' - outlets, sensors, switches - are first introduced to Red Leader using their own secret 24 bit address. Secret 'keys' are assigned to every device - lights, TV etc., known ONLY to you, and messages between devices are also encoded using random numbers to further secure the system.

No other Red Leader knows your slave codes; therefore no unauthorised person can interfere with the operation of your system.

You already have a home automation network. Plug in for £129.

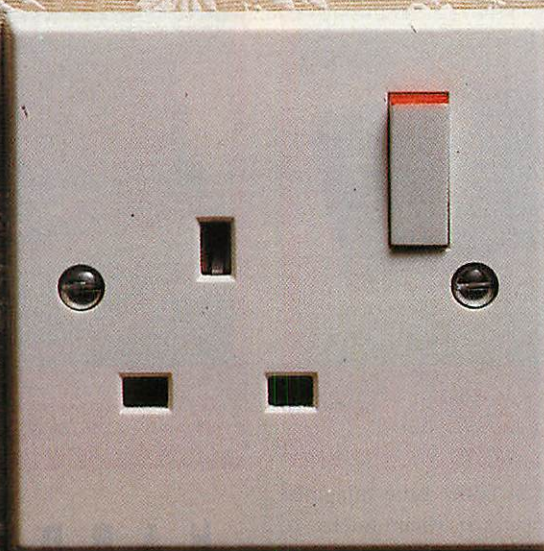

Computer to computer communication.

Communication is a vital aspect of our Red Boxes system.

Controllers are not isolated from one another - they are connected with each other, through the mains borne system and so communicate with each other and with Red Leader. If Red Two sends a message to Red Leader indicating an intruder, Red Leader responds by telling a switch unit to activate the alarm.

If you operate two home computers, they can communicate with each other through the system, enabling you to set them more complex tasks. And because Red Boxes have integral micro computers, this leaves your home micro free for normal use outside Red Boxes programming.

The possibilities are endless.

Our Red Boxes are ready for them. With humidity detectors, sensors or additional motors, this system can be used for weather monitoring, aerial rotation, home brewing, greenhouse thermostat control, keyless access via electronic door locks, remote access

control via a telephone modem - even a robotic arm for performing simple mechanical tasks like tea making and shoe polishing.

One day we might even invent one to iron shirts, why not. Our Project Manual at £9.95 describes a whole series of exciting applications.

Trial run.

For a FREE 14 day trial of the Red Boxes control system WITHOUT OBLIGATION complete the coupon and post to: Electronic Fulfilment Services Ltd., Chesterton Mill, French's Road, Cambridge CB4 3NP.

Your Red Boxes control system will be delivered within 28 days and if you are not delighted for any reason just return it to us for a full refund.

The Red Box starter system costs £129.

And additional Red One and Red Two Boxes are £34.95 each.

JUST PLUG IN AND SEE WHAT YOUR HOME COMPUTER IS MADE OF.

To: Electronic Fulfilment Services Ltd., Chesterton Mill, French's Road, Cambridge CB4 3NP

Please send me the Red Box starter system at £133 (inc. £4 p.&p.)

My microcomputer is a BBC Micro/Commodore 64/Spectrum 48k/Spectrum 128k. (Delete as applicable.)

Also include: _____ Project Manuals at £9.95.

_____ additional Red One control boxes at £36.95 each. (inc. £2 p.&p.)

_____ additional Red Two infra red sensor boxes at £36.95 each. (inc. £2 p.&p.)

I enclose a cheque for a total of £ _____ made payable to General Information Systems Ltd. Readers' Account.


Signature _____

Name _____


Address _____





REVIEWS

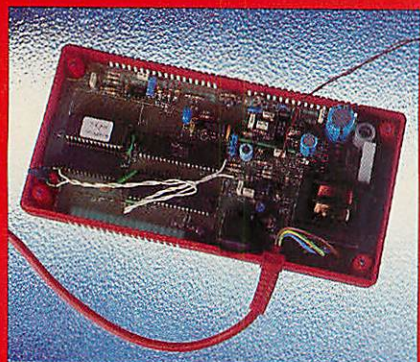

Red Leader: centre of the system. Programming is via your micro, and Leader then controls other Boxes

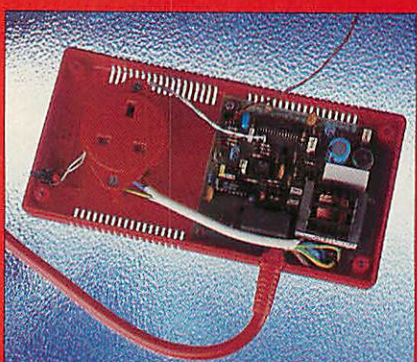

Electrical appliances are switched by Red One, communicating with Leader via a ring main carrier modulation

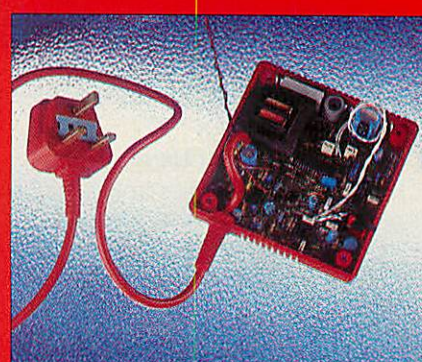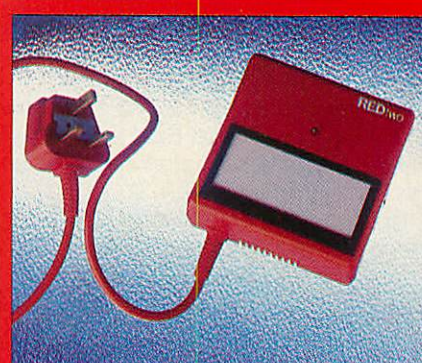

Detecting movement: Red Three. Red Leader processes output and instructs Red One to switch on socket

Most readers have at some time imagined plugging something into their micro to control an electrical device. However, very few people actually get around to doing it. I made a few vain attempts with my Atom years ago, which I had bought to control a telescope in the garden. I can say with all certainty the reason this grand project was never completed was the complexity and effort involved in wiring and soldering – not to forget programming. And, of course, your computer is tied up all the time controlling the whole thing.

General Information Systems (GIS), the brainchild of Acorn co-founder Chris Curry and staffed by many ex-Acorn employees, has launched a set of products known simply as Red Boxes.

Red Boxes allow a BBC micro to control electrical appliances all around the house. The need for complicated wiring has been avoided by sending all control information along the house's mains cables.

Starter system

The Red Box starter system contains three devices – Red Leader, Red One and Red Two. Red Leader as its name suggests is the heart of the system and contains a 6502 microprocessor, a 16k Basic ROM, 8k of RAM, mains transformer and mains modem circuitry.

Red One is effectively a computer controlled mains socket. Plug Red One into a

H A R D W A R E RED ALERT

A system for remote control of devices via the mains is tested by Bruce Smith

mains socket and any domestic appliance rated up to 13 amps can be plugged directly into the socket on Red One. By programming Red Leader, Red One can be switched on and off as required, activating the item plugged into it.

Red Two contains a sensor which can detect movement through changes in the heat level in the area covered by its field of view. It can detect the human body up to several feet away and could be used for burglar alarms and switching on lights. It does this by sending a message to Red Leader which in turn will activate Red One to perform the task.

A single Red Leader will control any number of Red Ones, Red Twos and associated mains appliances.

A simple application of the Red Boxes kit could be to use Red Two to determine when someone enters a room and get Red Leader to cause Red One to switch on a

lamp. This is very easy to do and to my great amusement, I recently spent most of a Saturday evening walking in and out of a room doing just that.

Menu program

So now we know exactly what they are, how do they fare in proper use and how do you program them? The first thing you need to do is plug Red Leader into a suitable mains socket and then connect it to your BBC micro via the RS423 serial port – a lead of suitable length is supplied for just this purpose. With the micro on you type:

* FX2,1

press Return and switch Red Leader on and within a few seconds the Red Leader menu screen is presented and you are ready to start.

The next task is to install the other devices. Figure 1 shows the menu screen after Red One and Red Two have been installed. The process is simple: press N for New and you are asked to enter a name for the device. Suppose we had a lamp plugged into Red One, we could respond with Lamp. Now any reference to Lamp will access that particular Red One controller. As each device is entered it is also allocated a device number.

To allow the correct device to be accessed, each Red Box has an identification number which the menu program then

requests. The device is now ready for use. Red Two can be installed in the same way, and all devices can be activated directly from the menu by moving a bar up and down the list. Press S for Set and then type ON or OFF. The selected device will then be switched on or off as instructed.

The times at which devices are activated can also be programmed from the menu screen. On and off times can be specified and unless an R is inserted into the Repeat column the device will not repeat each day. The time itself is set using the C option, and works on a 24-hour clock.

With all your devices installed pressing G for go will set all your programming into operation with Red Leader left in control – you can disconnect your micro and use it for other things.

All Red Boxes have a small override button so that any appliances attached to a Red Box can still be manually operated.

Red Basic

The menu program itself is written in Red Basic and studying this gives a good insight into the sort of things possible. Red Basic is remarkably similar to the original BBC Basic, although getting to grips with the variety of new commands requires a little bit of practice. The 50-page manual accompanying the Red Boxes pack is in general quite good. However, an amazing omission is the total lack of programs written in Red Basic to demonstrate the system's potential. We'll look out for Red Basic listings from readers to carry on the yellow pages in the future. Table 1 lists the commands available in Red Basic.

Most of the menu options described in the menu program have their direct counterparts in Red Basic. Controlling devices from Red Basic is easy: if the device is called Lamp you simply use the command:

TELL ("LAMP", ON)

or:

TELL ("LAMP", OFF)


New devices can be added at any time with the install command, and removed with erase. A very interesting command which would have been worthy of inclusion in any language is every. This is followed by a number which is expressed in fiftieths of a second. When Red Basic encounters this command it will execute the instructions in the program up to the continue command every period of specified time. In short you have a very easy-to-use interrupt driven, multi-tasking sequence of commands. For example the line following line will cause the current time to be displayed once a

Commands

CLEAR CLS, CONTINUE, DATA, DIM, DRAW, ELSE, END, ERASE, ERROR, EVERY, FOR, GCOL, GOSUB, GOTO, IF, INK, INPUT, INSTALL, LET, LIST, LOAD NAMES, LOAD VARS, MENU, MODE, MOVE, NEXT, ON, PAPER, PLOT, PRINT, READ, REM, REPEAT, REPORT, RESTORE, RETURN, RUN, SAVE NAMES, SAVE VARS, STOP, TELL, THEN, TO, UNTIL, USR, WHEN

Functions

ABS, ASC, CHRS, DATES, DAYS, DEVICES, DEVNUM, ERL, ERR, EVAL, FALSE, FREE, GET, GETS, INKEY, INKEYS, LEFTS, LEN, MDAY, MIDS, MONTH, MONTHS, NAMES, NOT, OFF, ON, POINT, POS, RIGHTS, RND, SCREENS, SGN, SPC, STATUS, STR\$, STRINGS, TAB, TIMES\$, TOP, TRUE, TYPE, VAL, VPOS, YEAR

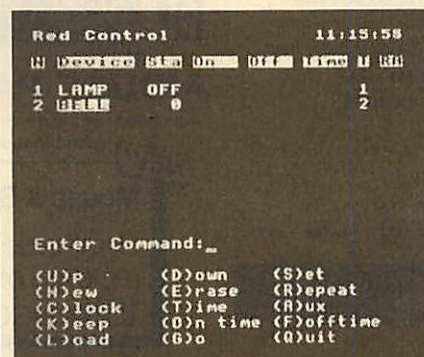

Top, table 1 shows commands available in Red basic. Below, figure 1 shows menu screen after installation

second:

EVERY 50 PRINT
TIMES:CONTINUE

Similarly, the line:

EVERY 100 GOSUB
update:CONTINUE

will call a subroutine called update every two seconds.

Once you have written a program in Red Basic you can set it running and unplug it from your computer which you can then use for other tasks. Remember Red Leader has 8k of RAM in which your programs are stored. When you hook Red Leader to your micro it simply downloads a terminal program, so in effect your BBC micro is simply a terminal! It also means that, by installing some new terminal code in the ROM, Red Boxes can be used on most home micros. A new ROM is planned for the Electron and Red Boxes will work on the Master and the Compact, though the manual omits to tell you to enter:

* CONFIG. BAUD 7

So if you have Master Compact ensure you do this first of all.

System expansion

The Red Box pack could be considered as a starter pack – and not surprisingly GIS has a whole host of goodies on the horizon to build up your system. One of the first of these will be an analogue to digital converter. This will give you the facility to

control mechanical equipment and also read the state of analogue devices.

The hobbyist market is also being investigated and there could be kits emerging for brewing and a burglar alarms – no doubt to be christened Red Nose kit and Red Alert respectively!

To my mind one of the most useful new boxes will be the RS box. If you have more than one BBC micro at home, plug an RS unit into each and they will be able to send data to each other via the mains at a respectable 2400baud.

Other useful applications that spring to mind include the use of an auto-answer modem. Ring up from the office and send the data down the line to switch on a light, slow-cooker, heating or whatever.

When you have devices operating in this manner, security is of the utmost importance. In flats, terraced houses and semi-detached houses it is probable that there will be a common or semi-common ring main. Therefore if several people were using Red Boxes it is possible that data could be intercepted, altered or trapped. A unique double random number encoding system has been built into Red Boxes that virtually rules out all possibility of this happening. To quote GIS staff, 'the CIA might just be able to crack it, but no hacker could'.

Recommended

There are not a lot of computer related products that I go particularly overboard about – but this is one of them. I think I can best sum up my feelings by saying this is one of the few products I would actually go out and spend my own money on, and I am lucky enough to get a lot of kit free or very cheaply.

Red Boxes will allow you to automate your home very easily and at a modest price. The industrial applications are limited at present, but that will probably change. As educational devices for the study of control they are like Lego – easy to use and do a first rate job.

If you're not really into control then I think you would still gain a great deal of enjoyment in playing around with them.

For Mums and Dads looking for Christmas gifts this is the present of the year – I might even buy the wife a set. I mean she doesn't really want that mink, does she?

Red Boxes starter system, £129. Extra Red One and Red Two boxes, £34.95 each. Details from Electronic Fulfilment Services Ltd, Chesterton Mill, French's Road, Cambridge CB4 3NP.



Advanced
Technology
Products
Limited

B.U.S. Station Road, Clowne,
Chesterfield, S43 4AB. ☎ (0246) 811585 (4 lines)



SIDEWISE

SIDEWISE, ROM/RAM EXPANSION FOR THE BBC MICRO

- ★ Full Sideways ROM Expansion to a total of 16 ROMS.
- ★ 16K Battery backed CMOS RAM Option - Ram is treated as ROM no 15 on read.
- ★ Software for Sideways ROMS may be down loaded and run in RAM under true Sideways environment. See below for details of software packages available.
- ★ An ideal tool for Sideways ROM program development with the addition of RAM.
- ★ Plug-in and go construction mounts neatly inside the BBC.
- ★ No soldering required to fit Sidewise.

- ★ Full buffering of address and data buses - prevents data bus loading problems associated with unbuffered boards.

Join the 10's of thousands of happy users.

£38.00 + £1.00 P&P + VAT

OPTIONS FOR SIDEWISE


Battery back up kit

£17.00 + 50p P&P + VAT

CMOS RAM 8K Bytes

£5.00 + 50p P&P + VAT

Buy 2 for £8.00 + 50p P&P + VAT



SIDEWISE PLUS

The Sideways ROM Board for the new BBC B+ Computer

- ★ Full Sideways expansion to a total of 10 x 16K ROMS.
- ★ No soldering required to fit Sidewise Plus.
- ★ Mounts neatly over the Sideways area inside BBC + Micro.
- ★ Fully buffered board.

£32.95 + £1.00 P&P + VAT



SOFTWARE PACKAGES

A range of software specifically designed to enhance and extend the use of Sideways RAM on ATPL Sidewise and other products.

- ★ **SPOOLIT** Allows the Sideways RAM to be used as an 8K or 16K printer buffer.

£10.00 + 50p P&P + VAT

- ★ **DFS SHIFT** Moves the user RAM workspace required by the DFS into Sideways RAM. Allows memory recovery to & OE00. Works with Acorn 0.9 DFS only.

£10.00 + 50p P&P + VAT

- ★ **SIDESWIPE** Allows you to save Sideways ROM onto disc and load Sideways ROMS from disc into RAM.

£10.00 + 50p P&P + VAT

- ★ **TURBOPROM - 1-2** Uses a fast programming algorithm to greatly reduce

programming time of EPROMS (14 mins = 2 mins). Used with Autoprom available on disc or Sideways ROM.

£15.00 + 50p P&P + VAT



CUSTOM RAM/ROM WRITER

Utility to produce a ROM image for AUTOPROM or SIDEWISE RAM to automatically download and run a BASIC programme, and/or your utilities on power up. Several utilities supplied with this package. please specify 40T, 80T, disk or cassette.

£14.95 + 50p P&P + VAT



CAD SYSTEMS



Distributor

Professional
CAD packages
for IBM,
Sperry, BBC
and Apple
computers

- ★ Over 10,000 users worldwide comprising: Electrical, electronic, mechanical, chemical, planning engineers, architects and educational establishments.

- ★ Complete systems supplied comprising: Computers, monitors, plotters and software.

Please contact Dale Atkins for further details.

**DEALERS ENQUIRIES WELCOME ON
ALL OUR PRODUCTS -PLEASE CALL**



**NEW
ATPL
HOTLINE**

For technical queries
on ATPL products
phone (0246) 811585
between 3-5 p.m. Mon to Fri.

WE OFFER A DESIGN DEVELOPMENT AND MANUFACTURING SERVICE



INSIDEOUT

INSIDEOUT is designed to make a sideways ROM socket available outside the BBC computer, to allow for easy exchange of Sideways ROM's.

- ★ Can be used from BBC model B or expansion board sockets.
- ★ Supplied with low insertion force socket for ease of use - no costly cartridge packing.
- ★ EPROM plug in and go.
- ★ Not limited to one device.

- ★ Socket rated at 100's of insertions mounted outside the BBC. Easily removed and refitted.
- ★ Can be mounted in user defined location - not fitting in an illegal position.

ONLY £13.00 + 50p P&P + VAT



MOUSE PAC

MOUSE PAC IS AMX COMPATIBLE

Advanced software for the BBC Computer, available in the following combinations.



Mouse & Software usually **£48.00** + £1.50 P&P + VAT

On all orders
received on or before
15th December.

**SPECIAL
Christmas Price
£44.00**



Colour Stick + Software **£34.95** + £1.00 P&P + VAT



Mouse only **£29.90** + £1.50 P&P + VAT



Software only **£20.00** + £1.00 P&P + VAT

- ★ Comprehensive manual.
- ★ Drawing facilities include: Multi point rubber banding, 4 colour shapes for circles, squares, rectangles, ellipses, arcs and sectors at any angle and size.
- ★ Drag drawing and air brush facilities with unique area masking.
- ★ Colour fill in any of 4 solid colours and a choice of 120 textured colours.
- ★ Screen printer dumps to Epson printer.

- ★ Utilities to use mouse or light pen in your own programs.
- ★ Colour stick fits analogue port, mouse fits to user port and needs 40 or 80 track disc drive.
- ★ Text can be entered in various sizes, fonts and colours.
- ★ Save and load screens to and from disc.

Please state 40 or 80 track disc.



BREAK LOCK

EVER HIT YOUR 'BREAK' KEY WHEN YOU DIDN'T MEAN TO?

FOR THE BBC MICRO

Fit ATPL 'BREAK LOCK' to your BBC Micro and avoid disaster where inadvertent use of 'BREAK' will cause loss of data and/or programmes. ATPL 'BREAK LOCK' is a 2 position key-switch that will:

- ★ Prevent accidental or unauthorised

use of the 'BREAK' key.

- ★ Act as a security device to prevent unauthorised use of your system more effectively and cheaper than security ROMS.
- ★ Easily and neatly fit in the 'Ash-tray'.
- ★ Render demonstration machines tamper-proof.

£8.53 + 50p P&P + VAT



AUTOPROM

Professional EPROM Programmer for the BBC computer and Acorn type Systems.

- ★ Capable of programming all 27 series EPROMS up to 27256 and most 25 series EPROMS.
- ★ Tape or disc based software, including fast program algorithm (27128 in 2

mins) and comprehensive manual.

- ★ Unique facility to run users own basic or machine code programs at Switch on or Reset.

£98.00 + £2.00 P&P + VAT

CONDITIONS OF SALE & DELIVERY

Cheques made payable to Advanced Technology Products Ltd. Please allow 28 days for delivery. Cost of carriage or postage refer to each section. Quantity orders and overseas carriage charged at cost. Condition of sales available on request.



ACCESS/VISA accepted. Carriage to be added to advertised price, then add VAT to the total. In accordance with our policy of progressive development, we reserve the right to modify specifications without prior notice.

REVIEWS

SOFTWARE

NEW ROMS FOR OLD

David Atherton tries out and tests
Advanced Computer Products' DFS ROM


Advanced Computer Products (ACP) has released a disc filing system (DFS) ROM chip for the 1770-based model B or B+ (product code ADB), Master 128 or Compact (ADM) and disc-based Electron (ADE). For this review I used ADM on a Master 128 and a Compact. Incidentally, I had no problems using this disc filing system with 3.5in discs, despite warnings from Acorn about DFS gap sizes being too small on 3.5in media.

The ROM contains all the standard DFS commands, messages and layouts as the Acorn 1770 version, and discs are interchangeable between the two. (Both products were written by the same author.) The only differences I spotted were on an 80 column catalogue layout and an 'Aborted' message if you say no to a format, backup or other drastic command.

There are some extra commands. *WORK allows loading and saving throughout a session without referring to a filename. *FILES gives the channel number (in hex), PTR and EXT values of any open files. *MAXFILES varies the number of open files available between zero and 10. On pre-Master machines, the higher the number, the higher the value of Page. The default is five files which sets Page to &1900. Finally, the ADB and ADE offer versions of the new filing system commands from the Master - *APPEND, *CREATE and so on. The 8271 emulation is at least as good as the Acorn DFS. I had no trouble loading several protected discs.

However, the real utility of the ACP disc filing system comes in the formats it offers. You can have any combination of single or double density discs, one or two surface cataloguing, and 31 or 62 filenames per catalogue.

Double density mode is controlled by *OPT 5 and must be selected before formatting and use. Automatic density sensing can be set, but this will slow down access times. ACP have had requests for automatic sensing to be the default condition, and current ROMs have this. Under double density there is a 60 per cent increase in

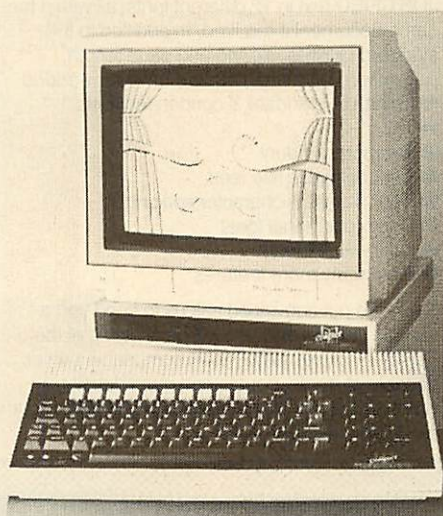

Master Compact: use DFS for auxilliary drives

space, so an 80 track surface contains 320k. The two-surface format is very useful for programs like *ViewStore* which insist that all their files are on the same surface, but ideally need the space of both sides of the disc. The advantages of 62 files catalogues need no explanation!

For BBC B+ 128k, Master and Compact owners, there is another bonus - a 64k RAM disc using the sideways RAM. This works at about 10 times the speed of discs for LOAD, SAVE, CHAIN etc, and about three times the speed for byte access. If you access files through OSGBPB rather than byte access (BPUT/BGET) then the speed increase is a mind-boggling 100 times! In all the RAM disc tests I carried out, everything except byte access seemed instantaneous.

After 'formatting' the RAM disc, it is selected as *DRIVE 8, but *SRDRIVE can make it appear as other drive number. A *SRDRIVE 0 will make Shift-Break do a boot from RAM disc.

Many commercial packages have less than 64k of code and *COPY 0 8 *.* will copy them quickly into RAM. When using packages which keep a file only partly in memory, the RAM disc dramatically improves performance. The RAM disc will work with other types of sideways RAM, but only the first 16k is recognised. ACP is

looking at 'popular alternative systems over 16k', which I guess means Solidisk.

Also, for those few who have fitted a second pair of disc drives to the Master's internal connector pads, this DFS support drives four to seven as separate from drives zero to three.

ACP claims a considerable speed improvement over Acorn's disc filing system, and my own tests bore out the claims that the DFS runs at about the same speed as Acorn's for LOAD-SAVE, and nearly twice the speed for byte access. These are the routines used most often. Increasingly, commercial software is using the OSGBPB call, and this runs virtually as fast as LOAD, or eight times the speed of Acorn DFS. PTR movement, which features in databases, happens seven times as fast as on Acorn DFS. These timings are all for single density. Double density is about 15 per cent faster.

The final feature that you never notice, but you would if it wasn't there, is file relocation. This avoids the notorious 'Can't Extend' problem, which all Acorn DFS users have met to their cost. It doesn't happen with this DFS. A file just gets put elsewhere on the disc, and the other files are shuffled around. If there really isn't enough room, a 'Disc full' error occurs.

The 80-page manual documents all the commands in a similar style to Acorn's own DFS manual. Detailed technical information on how to drive the DFS at assembly language level, and on the catalogue structure, is also there.

In using the DFS, I couldn't find any bugs other than a tiny one (now fixed by ACP), where *RUN after *OPT1,2 displays the wrong filename.

To summarise, this DFS is a lot better than Acorn's. For Compact and Electron disc users it's a must, and other BBC micro owners should consider it carefully.

Advanced 1770 DFS £34.50 including VAT. Further information from John Huddleston, Advanced Computer Products, 6 Ava House, High Street, Chobham, Surrey GU24 8LZ. Tel: (0276) 76545

NEW BBC PRODUCTS FROM CLARES

FONTWISE PLUS £20.00



FONTWISE PLUS is now compatible with VIEW, MINI OFFICE II, EDWORD 2 and INTERWORD as well as WORDWISE and WORDWISE+!

Now you can have PROPORTIONAL and JUSTIFIED text in 12 different fonts, all within the same document if required. In addition to the standard facilities like line and page length, pagination, left margin etc. we have now added

- Enlarged, standard & condensed fonts
- Tabs
- Temporary indent
- User definable line feed
- User definable character spacing
- Non proportional fonts
- Now with 12 fonts
- Plus many more features

If you are not convinced ask us to send you a sample printout and you will be amazed at the quality - requires an EPSON compatible printer capable of single, double and quad density graphics but you do not require any RAM in your printer to use FONTWISE PLUS.

Enhanced

BETA-BASE £25



SPECIFICATION

- | | |
|------------------|--|
| 1) Random Access | - disc based, single or dual drives |
| 2) File Size | - max 65,000 records |
| 3) Record Size | - up to 2048 characters and 200 fields |
| 4) Field Size | - up to 254 characters |
| 5) Holds | - approx 1200 ADDRESS records per 100k |
| 6) Search | - 5 search fields using powerful options |
| 7) Sort | - 500 records on 3 fields in 60 seconds. |

SYSTEM FEATURES

- *CALCULATE - using any valid expression
- *PRINTOUT - Powerful options
- *REDEFINE - Titles, fields etc.
- *TRANSFER - From one file to another
- *GLOBAL ENTRY - of repetitive data
- *SEARCH LISTS - Allow creation of sub Databases within main Database
- *SPOOLER - enables you to create spooled files that are compatible with Wordwise, View etc.
- *INPUT - is a routine included on the disc which will allow you to write your own utilities for accessing your data. Many of the programs on the utilities disc were written using this procedure

BETA-BASE UTILITIES £12.00



Extend the power of Beta-Base with the extra facilities provided on this disc.

- *MAIL MERGE
- *LABEL PRINTER
- *DISC SORT
- *EXTENDED SEARCH
- *FREE FORMAT TRANSFER
- *FAST PACK
- *STATUS

The MAIL MERGE alone is worth £12 so you get a real bargain with this disc. The features are so numerous that we cannot mention them all here.

Ask for our UTILITIES DATA SHEET if you want more information.

RAMROD £40 ROM



£35 DISC



RAMROD is the ultimate in toolkit ROMs and is fully compatible with the whole BBC range from Model B through to the MASTER 128 and including both 6502 and TURBO co-processors. RAMROD adds 54 new commands to your computer. Areas covered are DISC (DFS & ADFS), GENERAL (memory commands etc.), ROM (including sideways RAM) and TUBE.

RAMROD provides commands to dump memory or a disassembly of memory to a printer. Editors can display the screen in 40 or 80 column mode.

DISC

Edit discs and search for ASCII or HEX sequences.

GENERAL

Edit, search, disassemble, compare, dump to printer and relocate ANY area of memory including the SHADOW screen. List vectors in use, load and save function keys even on MASTER etc.

In addition to the above you can move between ROM/RAM banks using (CTRL) Cursor Keys when in either memory or disassembly mode PLUS you can switch between memory editor and disassembler by pressing (CTRL)(TAB).

ROM

Includes commands for listing, loading, saving, wiping, swapping, ROM images. PLUS formatting and titling RAM banks for the ROM filing system and saving programs in RFS format.

TUBE

Provides the same memory commands as GENERAL plus SHIFT and COMPARE memory across the TUBE both ways.

We cannot do justice to RAMROD in the space here so please ask us to send you a fuller data sheet - RING NOW!

NEW PRODUCTS

Watch out for a fabulous new product which will be released during SEPTEMBER for the MASTER and its compatibles.

This is a high quality art package called ARTROOM but it offers many features not provided elsewhere. It is a full screen package and is written by the authors of FLEET STREET EDITOR so you know that it will be good.

Ask for a data sheet NOW!

MACROM £40 £35 DISC



MACROM is a fast full featured MACRO ASSEMBLER ROM that allows the use of macros, which are loaded from a macro library stored on disc. Assembly can be from disc to memory, disc to disc, memory to memory or memory to disc, thus allowing the use of very long source code up to the length of your disc. MACROM source code is tokenized and thus takes up far less room in memory or on disc than most assemblers.

- Operate in any mode
- Tokenized source code
- Assembles 6502 & 65C02 codes
- Automatically loads macros from library on disc
- Automatically loads subroutines from disc
- Macro library supplied plus demo files
- Chain program sections into main code
- Many different assembly options
- Converts BBC assembler code into MACROM source code ● Very fast & very flexible

In a comparison with ADE, MACROM was able to assemble a program to disc in 1 min 24 secs compared to 5 minutes with ADE and the source code took up 30% less room on the disc.

Ask for a data sheet today



DISC

40 _____ 40 TRACK

80 _____ 80 TRACK

3 _____ 3" DISC - ADD £3

EPROM

Send for detailed newsletter.

All prices inclusive of VAT & Carriage - NO EXTRAS! Please state 40 or 80 track disc and state D.F.S. you use.

clares
MICRO SUPPLIES

DEPT AU
98 Middlewich Rd.,
Northwich, Cheshire CW9 7DA.
Tel: 0606 48511
Open 9—5pm Monday—Friday
LUNCH 12.30—1.30

REVIEWS

SOFTWARE

OVER THE WATER

Martin Cooper runs up his phone bill by examining two packages to enable British BBC micro users to enter French videotex

While politicians talk smugly about Britain's information technology lead, across the Channel a second revolution has taken place. Much quieter than the first, the only casualty has been the old printed telephone book, but it has left France an undisputed world leader in the field of videotex.

Fortunately, BBC micro owners can join in – as spectators at least – using two new software packages. Both are terminal emulators, making it possible to log on to Teletel, the French videotex system, from the UK, using a standard 1200/75 modem.

But first a few words about Teletel. Like Prestel, it is a page-based public viewdata service, and the resemblance is carried over into the pages which have the same 40-column format and graphics.

In terms of size, however, there is no comparison. While Prestel strains towards 100,000 users, Teletel already has well over two million. Some of its information providers maintain databases that are actually larger than Prestel.

Teletel is unlike Prestel too, in that it provides no service itself. It merely acts as a gateway to more than 1200 host computers ranging in size from micros to large minis. Roughly 65 per cent of the pages they supply are openly available, with no subscription or password. These are the 'kiosque' services – so called because it is as easy to use them as it is to buy a newspaper from a news stand.

The contents are familiar, news, sport, small ads, quizzes (many rather risqué!) and messaging services ranging from mailbox systems to something very like Micronet's Chatline. (In French, of course; quite a challenge.)

One thing conspicuously absent is tele-software. This is because the majority of users access the system using purpose-built terminals rather than micros. The 'Minitel' is the key to Teletel's phenomenal growth – it is given away free to anyone who agrees to forgo the old-fashioned 'phone



One of the pages that can be accessed on Teletel

book and use an on-line database of telephone subscribers.

The structure of Teletel has been shaped by the Minitel in exactly the same way as early receivers shaped Prestel. Most Prestels sets only had numeric keypads, hence our rather unwieldy system of page numbers. Minitels, on the other hand, all have alphanumeric keyboards. When you log on, you type in the name of the host you want to access and from then on movement round the database is by a combination of menus and keywords.

At first sight, the teletext chip makes the BBC micro an ideal machine on which to run a Minitel emulation. Unfortunately, appearances are deceptive. The mosaic graphics on the French system may look familiar but there is an additional character set of line graphics and any character can be displayed double width as well as double height. Add an extra colour and all those accents and you've got problems.

The main difficulty, however, lies in the fact that the French system does not use teletext-style control codes. This means that mode 7, with all its memory advantages, is out of the question.

Harrogate College of Arts and Technology have opted for mode 4 in their disc-based package *Collnet*. Although it is the least memory-hungry of the BBC micro graphics modes, mode 4 does have the

disadvantage of providing only a two-colour display, which means that a little of the detail is lost on some graphics pages.

Colour apart, the full Teletel specification is achieved. There is a screen save option and pages stored on disc can be re-displayed after logging off to be dumped to an Epson-compatible printer.

This is a good, workmanlike package for anyone who only wants an occasional taste of Teletel. It is very simple to operate, and comes with a useful leaflet outlining the structure of the French system.

Aldoda International's *T* is a more ambitious ROM-based package for the heavy user. It employs the four-colour mode 1, with a 'smart algorithm' to make colour combinations as attractive as possible. Pages can be saved, then redisplayed off-line and dumped to an Epson, but a fast text-only option is also available for printing on-line.

Commands to an intelligent modem can be issued from within the emulator and the default communications settings can be changed. Function keys can be re-defined to handle automatic log-on or to access frequently used pages automatically.

A friendly manual contains good advice about dialling Teletel direct and information about PSS options and even a short data dictionary of French buzzwords.

Anyone who wants to experiment can log on to Teletel's Kiosque services on 010 33 36 43 15 15. Settings – 1200/75, 7 bit, even parity. Databases to try: JEUTEL, FUNI, OBS and GRETTEL. Bonne chance! *Collnet* is available from the Computer Unit, Harrogate College of Arts and Technology, Haywra Crescent, Harrogate HG1 5BE, Tel: (0423) 505631 Ext. 30. Compatible with BBC B/B+/Master, £19.95.

T, from Aldoda International, 201 Haverstock Hill, London NW3 4QG, Tel: 01-794 0991, Prestel: 017944999, Gold: 72:DTB10179. Compatible with all Acorn computers, £28.50 ROM, £27 disc.


SEND OFF YOUR ORDER NOW!
ORDER FORM ON LAST PAGE OF VIGLEN SECTION

SALES HOTLINE
01 843 9903

Viglen

SYSTEMS

COMPLETE SYSTEMS FROM VIGLEN




The following systems come complete with the BBC Master and drives fitted in the Viglen Master Console unit.

Stock Code	Description	Price inc. VAT
V250	Viglen Master System 1 This system includes: BBC Master 128K in Console unit Single 400K (760K double density) 40/80 disc drive. Philips BM7502 Hi Res Green Screen Monitor	£689.00
V251	Viglen Master System 2 This system includes: Dual 800K (1520K double density) 40/80 disc drive Philips CM 8501 Standard Res colour Monitor	£879.00

Other systems can be tailor made for your requirements 3 1/2" drive can be supplied instead of 5 1/4" at the same price. Please call. To complete the system you only need to add a printer from any of the range. The current special offer printer that's particularly suited to the packages is the Centronics GLP at £119.95 inc. VAT. Please add £12.00 for insured courier delivery.

BBC MICRO & MASTER COMPATIBLE DRIVES

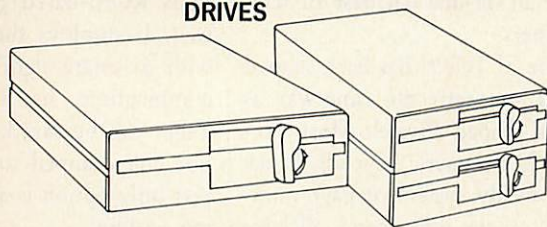

All disc drives are supplied with a manual, packed utilities disc and a full 12 Months warranty (2 Year Warranty available) and are ready to plug in and use on a BBC B (fitted with a DFS) B + or Master micro. 40/80 Track drives have a switch which enables operation in either 40 or 80 track mode.

The capacities quoted are given in single density mode; for double density mode (1770 DFS + ADFS as in the Master) the capacities should be approximately doubled.

An integral power supply is not necessary as the disc drives run from the micro's power source however should you require drives with their own power supply please add the price of the integral power supply to the price of the drive.


If your BBC B micro does not have a DFS fitted then you will also require the Acorn dfs kit.

Stock Code	Description	Price inc. VAT
V014	Single 400K Viglen 40/80 Track Drive	£115.00
V019	Dual 800K Viglen 40/80 Track Drive	£215.00
V001	Single 100K TEAC 40 Track Drive	£89.00
V004	Single 400K TEAC 40/80 Track Drive	£139.00
V005	Dual 200K TEAC 40 Track Drive	£178.00
V008	Dual 800K TEAC 40/80 Track Drive	£278.00
V020	Single 400K Mitsubishi 40/80 Track Drive	£129.00
V021	Dual 800K Mitsubishi 40/80 Track Drive	£258.00
V060	Single 3.5" 400K Viglen Drive	£109.00
V061	Dual 3.5" 800K Viglen Drive	£218.00
V096	Integral power supply for single Drive	£19.00
V097	Integral power supply for dual Drive	£24.00
V095	Integral power supply for 3.5" Drives	£24.00
V098	External power supply for dual Drives	£29.00
V502	Acorn 1770 dfs kit or 1.2 DNFS	£49.95
V503	Acorn ADFS Rom	£29.95

Please add £12.00 for insured courier delivery.

DISC DRIVES

FLOPPY DISCS

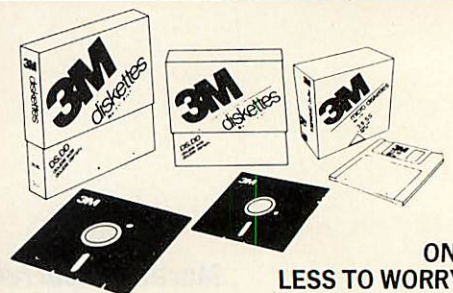


ONE THING LESS TO WORRY ABOUT

3M Scotch Floppy discs all have a lifetime guarantee; Each box contains 10 discs.

Stock Code	Description	Price inc. VAT
V110	3M 40 track single sided (744 SS, DD)	£11.50 (per box)
V111	3M 40 track double sided (745 DS, DD)	£13.80 (per box)
V112	3M 80 track single sided (746 SS, DD)	£19.50 (per box)
V113	3M 80 track double sided (747 DS, DD)	£19.50 (per box)
V114	Special offer 80 track double sided	£16.00 (per box)
V135	3M 3.5" 80 track double sided (3.5, DS)	£31.00 (per box)
V136	3M 3.5" 80 track double sided (3.5, DS)	£3.50 (Each)

Please add £2.00 P & P.

DUCKS

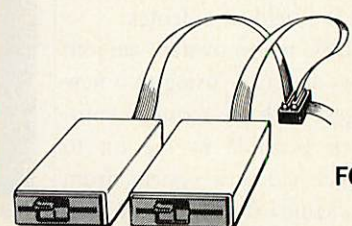


DUAL DRIVES FOR LESS THAN £17!

The Viglen Data DUCK (Dualling Up Connector Kit) converts any two single drives to a dual drive instantly. Simply plug the duck into the micro's disc drive socket and plug two single drives (any type and any make) into the duck to obtain a dual drive system accessed as drive 0 (and 2 if double sided) and drive 1 (and 3 if double sided). If neither single drive has its own power supply then you will require a Viglen power DUCK in order to obtain two disc drive power sockets from the micro.

★ No soldering simply plugs in.		
★ No need to take disc drives apart to change links.		
Stock Code	Description	Price inc. VAT
V084	Viglen data duck	£16.95
V085	Viglen power duck	£8.00

Please add £2.50 for P & P.


PRINTERS

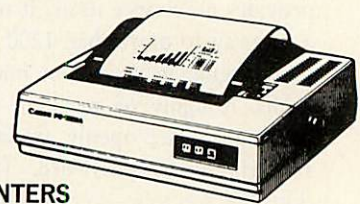

DOT MATRIX PRINTERS

Dot Matrix Printers		Price inc. VAT
Stock Code	Description	
V410	Canon PW1080A/Taxan KP810	£239.00
V409	Centronics GLP	See Special Offer Box
V420	Epson LX86 with tractor feed	£269.00
V421	Epson FX85	£379.00
V422	Epson LQ800 (200 cps)	£559.00
Daisywheel Letter quality printers		
V400	Juki 6100	£279.00
Ribbons		
V462	Canon PW1080A/Taxan KP810 ribbon	£5.95
V463	Epson MX80/RX80/FX80/FX85 ribbon	£6.00
V464	Centronics GLP ribbon	£3.95
Printer cables		
V495	BBC micro/ Master printer cable	£8.00
V497	Master Compact printer cable	£8.00


Please add £8.00 for insured courier delivery and £1.50 for ribbon.

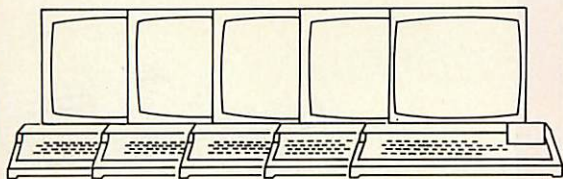

BBC MICROS

Stock Code	Description	Price inc. VAT
V210	BBC Master 128K	£459.00
V204	BBC Master COMPACT entry system	£442.75
V205	BBC Master COMPACT TV system	£458.00
V206	BBC Master COMPACT Monochrome system	£539.35
V207	BBC Master COMPACT Med Res Colour sys	£688.85
V208	BBC Master COMPACT Std Res Colour sys	£649.00

Please add £8.00 for insured courier delivery.

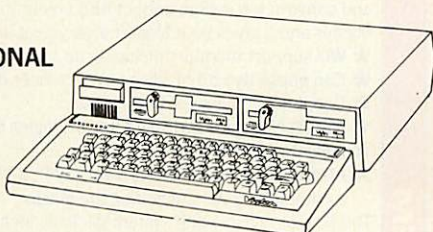VIGLEN
PROFESSIONAL
CONSOLE
UNIT

Your BBC micro can be given the professional PC-look by replacing your existing lid with this smartly styled package which can house two disc drives, the Viglen Rom cartridge system, most internal boards and can support monitors including 14" television sets. PCU Package includes: Keyboard case, Metal screened main unit, casing including internal fittings, 2 meter coiled cable to connect main unit to keyboard, Blanking plates to blank, out disc drive apertures, Keyboard label.


Other accessories are also available including units fitted with single or dual drives.

Stock Code	Description	Price inc. VAT
V851	Viglen Professional Console unit for the BBC micro (PCU)	£49.00
Accessories for the Professional Console unit		
V852	2 Meter coil cable on its own	£15.00
V853	Dual drive data cable for console unit	£9.00
V853	Dual drive power cable for console unit	£5.00
V855	Power supply for PCU (capable of running two 1/2 height drives)	£32.00
V856	Fan kit for PCU (only necessary if your BBC normally gets extremely hot)	£35.00
V857	Extension keyboard on its own including coiled cable.	£29.00
V858	Fitting bracket for 3 1/2" drive	£9.00
	Fitting service available from	£15.00

Please add £6.00 for courier insured delivery.

NEW STYLE.
NEW TECHNOLOGY.
NEW SOFTWARE.

GRAFPAD 2

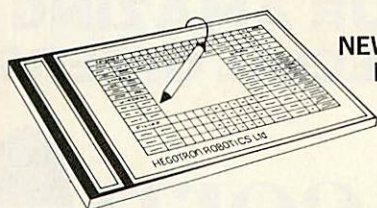


The Grafpad 2 is the ultimate in graphic input devices and includes a new powerful art package allowing you to draw and paint in numerous colour and pattern combinations. Other facilities include copying, inverting, mirror imaging and flipping any part of your picture. The software comes on Rom and disc.

It's fast, easy to use and all commands are selected directly from the tablet, even text and numerics. Just point the pen and click the switch. Resolution: 1280 x 1024 pixels.

Stock Code	Description	Price inc. VAT
V568	Graphpad 2	£75.50

Please add £8.00 insured courier delivery.

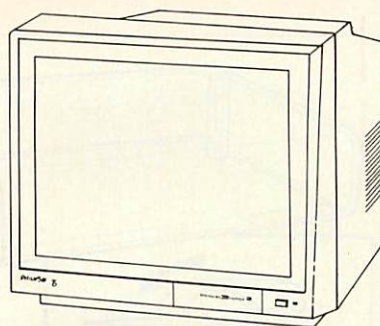COLOUR
& MONO

All the following monitors are supplied with a cable to fit the BBC micro/ Master and Compact.


Monochrome Monitors

Stock Code	Description	Price inc. VAT
V331	Philips BM7502 Hi Res Green	£85.00
V332	Philips BM7522 Hi Res Amber	£95.00
V333	Taxan KX1201 Hi Res Green	£89.00

Colour Monitors

Stock Code	Description	Price inc. VAT
V335	Philips CF1114 14" Colour TV/Monitor	£174.95
V345	Philips CM8501 Std Res Colour Monitor	£179.00
V346	Philips CM8533 Med Res Colour Monitor	£289.00
V300	Microvitec 1431 Std Res Colour Monitor	£219.00
V301	Microvitec 1451 Med Res Colour Monitor	£289.00
V304	Microvitec 1451APL Med Res Colour Monitor with PAL	£329.00
V302	Microvitec 1441 Hi Res Colour Monitor	£425.00
V356	Taxan Super Vision II	£299.00
V357	Taxan Super Vision III	£369.00

Please add £8.00 for insured courier delivery.

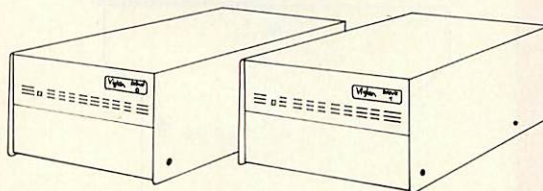MEGA BYTES
FOR MINI BUCKS

Plug in 20 to 112 Megabytes of extra storage with the Viglen Winchester system.

The Viglen Winchester is ready to plug in and use on a BBC Master micro; for a BBC B or B plus you will merely need to fit the Acorn ADFS Rom. The Winchesters are 100% compatible with the Acorn Winchester and Acorn ADFS and will also work with the Acorn Master 512 board with DOS plus.

Drive 1 Winchesters are also available for backup or just more storage and simply plug into the back of the Drive 0 unit.

The Winchester package consists of: Winchester unit (cased with controller boards, power supply and fan), Master reference Manual part 1, Winchester user guide and Winchester utilities on disc (such as formatter, verifier, ADFS menu and sophisticated backup program allowing you to make fast backups on DFS discs, ADFS discs or Drive 1 Winchester.)

Stock Code	Description	Price inc. VAT
Drive 0 Single		
V150	VB20 20Meg Viglen Winchester	£759.00
V152	VB28 28Meg Viglen Winchester	£799.00
V155	VB40 40Meg Viglen Winchester	£1045.95
V156	VB56 56Meg Viglen Winchester	£1119.95
Drive 1 Second Drive		
V160	VB120 20Meg Drive 1 Winchester	£599.00
V162	VB128 28Meg Drive 1 Winchester	£649.00
V165	VB140 40Meg Drive 1 Winchester	£819.95
V167	VB156 56Meg Drive 1 Winchester	£899.95
V503	Acorn ADFS Rom and Manual (Only necessary for BBC B or B Plus	£29.95

Please add £8 for insured courier delivery.

SALES HOTLINE
01 843 9903

Viglen Viglen

SEND OFF YOUR ORDER NOW!


ORDER FORM ON LAST PAGE OF VIGLEN SECTION

SALES HOTLINE
01 843 9903

Viglen Viglen

SEND OFF YOUR ORDER NOW!


PRINTER STANDS

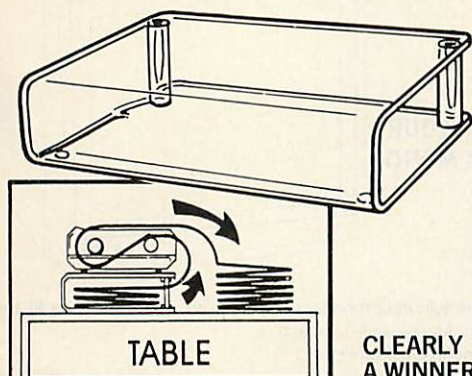

The Viglen printer stands are beautifully finished in clear perspex and raise the printer high enough to put continuous stationary underneath.

Stock Code	Description	Price inc. VAT
V490	80 Column Printer Stand (15" x 13" x 3.5")	£19.95
V491	136 Column Printer Stand (23.5" x 13" x 3.5")	£27.95

Please add £3 P & P

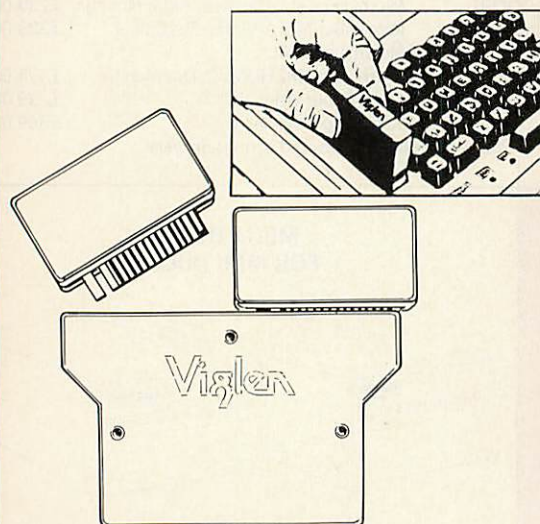

VIGLEN ROM CARTRIDGE SYSTEM

Having fitted the Viglen Rom cartridge system to your BBC, Master or Master COMPACT, you can plug in your Roms/Eproms simply by inserting each one in a Viglen cartridge and plugging in whichever cartridge you want to use. The same Viglen cartridge can be used on all the micros mentioned and there is no need to switch the micro on and off between cartridge changes.

The Viglen cartridge system for the BBC micro consists of the cartridge cable assembly and socket, blanking off plates, 1 cartridge and cartridge storage rack. The cartridge socket when fitted protrudes from the rectangular slot on the left of the keyboard where the cartridges are subsequently inserted. It is simple to fit and requires no soldering.


The Viglen cartridge system for the Master and Master COMPACT simply plugs into your Master cartridge slot (or COMPACT expansion port) and accepts two Viglen cartridges. On the Master you can plug in up to two Viglen cartridge systems thus giving you access to 4 Viglen Cartridges simultaneously. The system comes complete with 2 cartridges and cartridge storage rack. On the Master you can also use Viglen cartridges which have 32 and 64K paged Roms inserted.

Stock Code	Description	Price inc. VAT
V560	Viglen Rom cartridge system for BBC	£12.95
V559	Viglen Rom cartridge system for BBC (low profile)	£12.95
V550	Viglen Rom cartridge system for Master	£14.95
V551	Viglen Rom cartridge system for COMPACT	£14.95
V561	Single Viglen cartridge	£1.99

Please add £2.50 P & P (£00.50 for single cartridge).

CARTRIDGE SYSTEM

CONSOLE SYSTEM

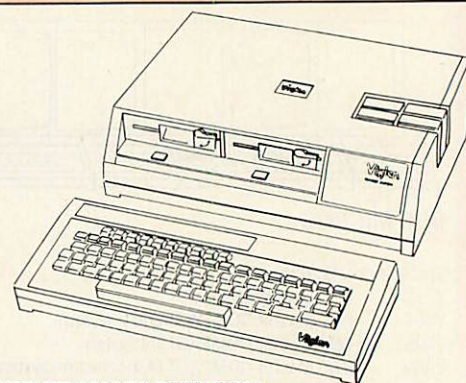

MASTER TRANSFORMATION

Give your BBC Master micro the professional PC look by replacing your existing lid with this smartly styled package. The system is strong and constructed in high impact ABS colour matched to the BBC Master and it gives your Master a very neat and impressive look.

- ★ Will support monitors including up to 16" TV.
- ★ Can house two 5 1/4" disc or Winchester drives.
- ★ Capable of housing 3 1/2" drives.
- ★ Will accept Acorn cartridges and the Viglen Master Cartridge system.
- ★ Full internal metal screening.
- ★ Also available with fitted drives (5 1/4", 3 1/2" or Winchester) or as a complete system including the Master.

The Master console unit system package includes:

Remote keyboard case with 1.2m cable.

Metal screened main unit casing

including internal fittings for 5 1/4" drives.

Two switches which can be used for 40/80 track switching and can be either fitted on the front or rear of unit.

Two blanking plates to blank out any drive aperture that is not used.

Full labelling kit.

Fully illustrated fitting instructions.

Stock Code	Description	Price inc. VAT
V861	Viglen Master Console unit	£59.00
Accessories for the Master Console unit		
V853	Dual Drive data cable for console unit	£9.00
V854	Dual Drive power cable for console unit	£5.00
V855	Power supply for the console unit	£32.00
V856	Fan Kit for console unit	£35.00
V858	Fitting bracket for 3 1/2" drive	£9.00
	Fitting service available from	£15.00


Please add £8 for insured courier delivery.

**LOOK FOR
OUR AMAZING
SPECIAL OFFERS**

Acorn
Authorised Dealer

MONITOR

Special Offers



PHILIPS COLOUR MONITOR

PHILIPS Standard resolution Colour Monitor (Model CM8501) including cable at an incredible price of £179.00.

This sleek looking colour monitor features the following: RGB and audio input, Bandwidth > 8Mhz, horizontal resolution 390 Pixels, and adjustable leg.


Stock Code Description

V345 Philips CM8501 Standard Res colour monitor

Please add £8.00 for insured courier delivery.

Price inc. VAT
£179.00

PRINTER

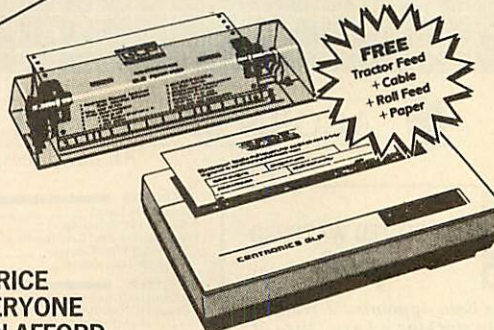

FREE
Tractor Feed
+ Cable
+ Roll Feed
+ Paper

A PRICE EVERYONE CAN AFFORD

The Centronics GLP is a dot matrix printer with the following outstanding features:

- * Normal 50cps draft printing.
- * Near Letter Quality (12 cps).
- * Logic seeking head.
- * Fully Epson Compatible (with Elite, Emphasised, double strike, condensed, superscript, subscript, Italics and other modes).
- * Prints 80 columns on normal paper (A4 sheets, continuous stationary or roll paper).

Offer includes: FREE Tractor feed unit with paper.

FREE Roll feed unit with roll paper.

FREE Printer cable.

No extras needed, just plug in and use.

Incredible Price of £119.95 inc. VAT.

Stock Code Description

V409 GLP printer package with cable

Please add £8.00 for insured courier delivery.

Price inc. VAT
£119.95

SEND OFF YOUR ORDER NOW!


Viglen

Viglen Ltd.,
Unit 7,
Trumpers Way,
Hanwell, London. W7 2QA
Telephone: 01-843 9903
Telex: 919 304 VIGLEN G
Fax: 01-574 5126

Acorn

Authorised Dealer

Prices correct at time of going to press
and offers are subject to availability



HOW TO ORDER

Simply fill in the coupon or write to us with your requirements enclosing a cheque/postal order or your credit card no. for the total amount. Don't forget to add the cost of delivery. Viglen endeavour to despatch all credit card orders within 24 hours.

Credit card holders may order by telephone on our sales hotline 01-843 9903 (8 lines).

Orders from overseas should be exclusive of VAT (Please deduct 15% from the total cost).

OFFICIAL ORDERS

Official orders from education establishments, Government departments and Plc companies accepted.

Viglen has a special education department to process orders and queries from schools, colleges, universities and Local authorities so please ask for our education department when you call. Being one of the major suppliers to the Education market, the experienced Viglen team will be able to understand and help you with your requirements.



Dealer & Trade Enquiries:
Viglen Products Limited
23/28 Penn Street, London N1
01-729 2100

Showroom Opening Times

(Hanwell W.7.)
Monday-Friday 9.00-5.30
Saturday 9.30-2.00

Fill in and post to Viglen Ltd., Unit 7, Trumpers Way, Hanwell, London W7 2QA. Tel. No. 01-843 9903. Please make cheques and postal orders payable to Viglen Ltd.

STOCK CODE	DESCRIPTION	QUANTITY	TOTAL PRICE

Please find enclosed a cheque/postal order ☐

I prefer to pay by VISA ☐ ACCESS ☐

* Tick one please.

Card No. _____ Signature _____

Expiry date _____

Name _____

Address _____

Postcode _____

Tel. no. _____

SALES HOTLINE
01 843 9903

Viglen Viglen

MICROMAN Computers



ACORN SPECIALIST COMPUTER CENTRE

All our prices include VAT.



APPOINTED WATFORD DEALER

Microman has been appointed a Watford Dealer. We are stocking a large range of Watford products, including the popular BEEB DIGITIZER, MAGAZINE MAKER, 32K SHADOW RAM CARD, RAM/ROM CARDS, DFS UPGRADES and many more available from our shop.

BBC MASTER SERIES	
Master 128	475.00
Master Turbo Module	125.00
Master 512 Upgrade	399.00
MASTER ROM CARTRIDGES	
ISO Pascal	69.00
Logo	69.00
BBC MASTER COMPACT SERIES	
Master Compact + TV Modulator	458.85
Master Compact + Green Monitor	539.35
Master Compact + Colour Monitor	688.85
Compact Software	Phone for new list
ACORN PERIPHERALS	
800K Dual Disc Drive + Stand	316.00
Teletext Receiver	99.00
Prestel Receiver	138.00
6502 2nd Processor	199.00
IEEE Interface	125.00
BBC B and B+ DISC INTERFACES	
Acorn 8271 0.9 Disc Interface	59.80
Acorn DNFS ROM	20.60
Acorn 1770 Disc Interface	49.95
Acorn ADFS ROM	29.99
Watford Single Density DFS	62.10
Solidisk DDFS 2-2 Interface	35.00
RAM/ROM SHADOW EXPANSION	
Watford Expansion Boards	Large range in stock
Aries B12 Sideways ROM Board	46.00
Aries B12c Adapter	5.75
Aries B32 RAM Extension Board	92.00
ATPL Sideways ROM Board	43.70
EPROM PROGRAMMERS/ERASERS	
Control Telemetry Eprom Prog.	109.25
Uviprogram EPROM Prog.	20.95
Uviprogram EPROM Prog. + ZIF	25.95
Uviprogram 32k EPROM Prog. + ZIF	25.95
Uviprogram ROM Software	5.00
Uviprogram SWR Disc Software	2.00
Uviprogram EPROM Eraser	20.95
Uviprogram EPROM Eraser + Timer	25.95
EPROMS/RAM	
Eproms 2764 8K	2.75
Eproms 27128 16K	3.45
27128 per 5 Eproms.	16.50
RAM 6264LP-15 8K	3.95
27256 (12.5v)	5.95
MONITORS (inc BBC CABLE)	
Microvitec 1431 Std/Metal	229.00
Microvitec 1451 Med/Metal	279.00
Philips 1114 TV/Monitor/CV	209.00
Philips CM85324 STD/RGB/CV	175.00
Philips CM85333 Med/RGB/CV	299.00
Philips Green 7502	85.00
Philips Amber 7522	89.00
MODEMS/COMMUNICATIONS	
Pace Nightingale + Commstar	129.95
Pace Nightingale	113.85
PACE DISC DRIVE PRODUCTS	
Pace PSD3 400K 40-80T	128.95
Pace PDD3 800K 40-80T	249.95
Pace PDS3P 400K 40-80T + PSU	154.95
Pace PDD3P 800K 40-80T + PSU	286.95

PRINTERS	
Canon PW1080A	289.00
Star NL10 (No Interface)	239.00
Star NL10 + BBC Cent Interface	278.00
Star SG15 Wide Carriage	389.00
Juki 6100 Daisywheel	299.00
PLOTTERS	
Roland DXY-880A A3 Plotter	P.O.A.
Roland DXY-980A A3 Plotter	1207.50
Watanabe MP1000 A3 Plotter	P.O.A.
Epson H180 Plotter (4 pen)	458.85
Hitachi A3 Plotter (4 pen)	495.00
Microman Plotter ROM	29.95
DIGITISERS	
Graphpad II	75.50
Cherry Digitiser	632.50
BBC CAD SYSTEMS	
Bitslik 1	375.00
Bitslik Multi-plotter Driver	79.00
Bitslik 2 (Master compatible)	799.00
Bitslik 2 Upgrade	460.00
Pineapple Diagram (40T Disc)	28.75
Pineapple Diagram (80T Disc)	28.75
Pineapple PCB Designer	97.75
Novacad Trackerball Compatible	113.85
Novacad Plotter Utilities	32.78

OPUS 5802 400K 40/80T/DS	
£109.95	
OPUS 5802D 800K 40/80T/DS	
£209.95	
OPUS 5802D 800K 40/80T/DS including PSU	
£239.95	
Opus Challenger 256K — £179.95	
Opus Challenger 512K — £199.95	

MOUSE/TRACKERBALL PRODUCTS	
AMX Mouse + Free Watford Art	79.95
AMX Mouse: Master Version	79.95
AMX Pagemaker	49.95
AMX Pagemaker: Master version	49.95
AMX Desk	24.95
AMX Utilities	14.95
AMX Max	19.95
AMX Super Art ROM	49.95
AMX 3D Zicon	24.95
AMX Database	24.95
AMX Xam	24.95
Fleet Street Editor	39.95
Fleet Street Editor Utilities	14.95
Trackerball RB2 + ICON Soft	69.95
Trackerball + Pointer (Master)	69.95
Pointer ROM	14.37
Trackerball/Mouse Interface	9.20

VIDEO DIGITISERS	
Watford BEEB Video Digitiser	126.50
Watford Magazine Maker	148.35

WORD-PROCESSORS + UTILITIES	
View 2.1 ROM	52.00
View 3.0 ROM	79.00
Viewspell ROM	39.95
Intervord ROM	49.00
Wordwise Plus ROM	49.00
Watford Word-Aid	27.60

FONT/NLQ UTILITIES	
Watford NLQROM for Epson	28.75
View Printer Driver for above	11.50
Hershey Font (Disc)	21.00
Clares Fontwise (Disc)	12.00
Clares Fontwise Plus (Disc)	20.00
Clares Fonteditor (Disc)	20.00
Fontaid ROM	30.00

Fontaid Utilities Disc A	15.00
Fontaid Utilities Disc B	15.00
Multi-Font NLQ	30.00

DATABASES + UTILITIES	
Viewstore ROM	52.00
Acorn Database (Disc)	15.35
Masterfile II (Disc)	22.00
Betabase	25.00

SPREADSHEETS/CHARTS	
Viewsheets ROM	52.00
Viewplot ROM	29.95
Ultracalc ROM	79.50
Intersheet ROM	49.95
Interchart ROM	33.95

PANASONIC KX-P1080 PRINTER

This well-built printer offers many advanced features. It provides both friction and tractor feed NLQ as well as draft modes and full Epson code compatibility. This special offer includes a BBC Cable. Further details on request.

£179.00

LANGUAGES	
BCPL ROM	59.80
BCPL Calculations	34.50
BCPL Stand Alone Generator	49.90
ISO Pascal ROM	59.95
ISO Pascal Stand Alone Gen.	34.50
Comal ROM	49.85
Acorn LOGO ROM	69.00
Logotron LOGO ROM	69.00
Micro-Proplog ROM	79.95

UTILITIES	
Acorn Basic Editor ROM	29.90
Acorn Termulator ROM	34.50
Acorn Graphics Ext. ROM	29.90
Computer Concepts	Full range
Beebug	Full range
Caretaker Basic Utility ROM	33.35
System ADE ROM	60.00
System SPY ROM	30.00
Slave Plus ROM	39.95
Floppy:ise Plus ROM	29.95
Proc-Kit (Disc)	10.95
Loc-Kit (Disc)	25.00
Vine Replay ROM's	35.00
Vine TDROM	18.00
Clares Profile Disc	12.00
Clares BROM Plus	30.00
Clares Ramrod ROM	40.00
Watford The Investigator	23.00
Watford Dumpout 3 ROM	28.75
CIE Inform	20.00
Moviemaker ROM	29.90
Supergraph	28.75
Pineapple Compiler	28.75

VIGLEN PRODUCTS	
Viglen Console	49.00
Viglen Printer Stand	19.95

PC SHOWROOM

With the launch of the Amstrad PC1512 and Opus PC II, we are opening a new showroom for the sales of PC compatible computers, add-on card, hard discs, printers and software. The showroom is adjacent to our existing shop and we welcome our existing and new customers to visit us and have an opportunity to see and use this new range of machines and software.

We will be stocking the range of Amstrad PC1512, Opus PC II and Tandon computers along with software titles such as VP Planner, VP Info, Executive Writer, Supercalc 3, Wordstar 1512, Word Junior and many more applications.

Opening times for the showroom will be 9-5 Mon.-Fri. and 9-12 Sat. Our shop times remain unchanged.

MAIL ORDER SALES

PHONE 074488 5295

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

Carriage/Postage Charges: Computers/Printers/Disc Drives: Next day delivery, £8.00; Royal Mail Trackback, £4.00; ROM/Exp. Boards/Software: First class post, £1.00.

Our Mail Order Dept. will despatch your order within 24 hours (subject to availability).


ALL PRICES INCLUDE VAT

Government and Educational Orders accepted.

SHOP

SHOP OPENING
9-6 MONDAY TO SATURDAY

Unit 1A
Rainford Industrial Estate
Mill Lane, Rainford,
St Helens, Merseyside, WA11 8LS
Phone 074488 5242

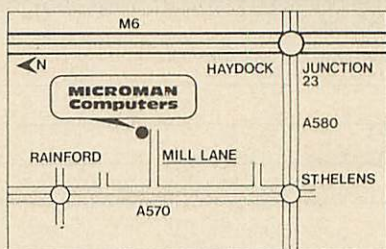

REVIEWS

SOFTWARE

WORD WISER

The TVEI *Wordwise* Training Pack and Pen-Friend, a ROM for making *Wordwise +* easier to use, are assessed by Patrick Quick

The *Wordwise* Training Pack

The TVEI *Wordwise* Training Pack is intended to be used mainly by teachers to teach themselves wordprocessing or by trainers teaching wordprocessing to teachers. Having said that, it could just as easily be used by anyone to learn wordprocessing with *Wordwise*; the only teacher-specific bit seems to be the short section in the 'Companion' booklet justifying the learning of wordprocessing.

The pack was produced by teacher trainers, principally at Jordanhill College of Education, and many Educational Institutes and educators are mentioned as contributing in some way. It aims to cover all versions so far of *Wordwise* and *Wordwise +* and to cater for all versions of the BBC micro up to and including the Master.

The pack consists of five parts, first the 'Companion' booklet introduces the pack and the idea of wordprocessing. It provides an index to the whole pack and a glossary. It also suggests the best ways of using the rest of the pack.

The main part of the pack is an 'easel' style booklet. This is a spiral bound pack of flip-over exercise cards with an integral stand. The easel can be stood either way around, and reading from one end gives you 'Easel One' and from the other end the other sides of the cards comprise 'Easel Two'. Easel One starts from scratch and introduces you to using *Wordwise* and its basic wordprocessing facilities. Slightly experienced *Wordwise* users can start conveniently with Easel Two directly, which goes into layouts, print control, and briefly, segment programming.

The exercise disc, the third part of the pack and the only software, contains sample texts for the Easel's exercises. For use by complete beginners, perhaps it should have been write protected?

A spiral bound pack of reference cards provides more detailed information. Each of the 60 sides involves only one small topic. For example, page one covers auto-repeat, page 54 covers spooling of text.

Finally, the prompt card is a shiny, stiff, A4 card folded into three and containing

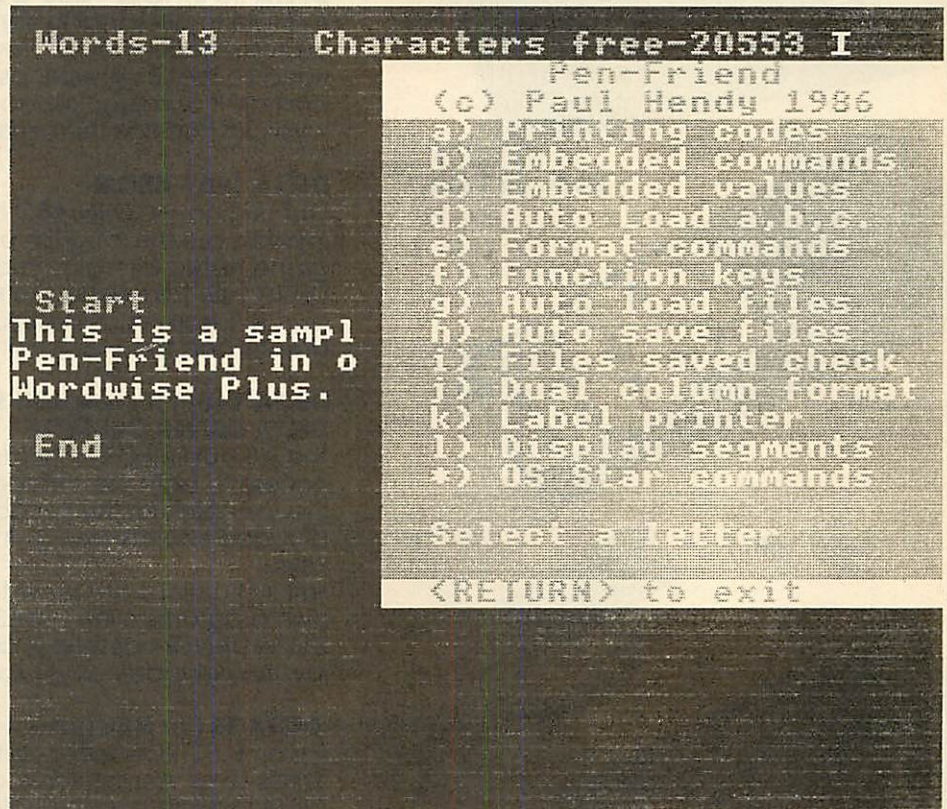


Figure 1. The main pull-down menu of *Pen-Friend*

brief reminders of main points such as embedded commands. I will keep this near my micro for my own use.

The wide base of support during the development of this pack shows in its easily used and understood layout. Most information can be found quickly. The variety of media gives a flexible coverage for the different needs a range of types of users might have while learning wordprocessing at various levels. Most explanations are carefully and clearly worded. The training pack is very flexible and can be used with or without supervision by a wide range of people. In summary, the whole pack is well designed and represents very good value for money.

Pen-Friend


The *Pen-Friend* ROM is designed to make *Wordwise +* easier to use. Most of the formatting facilities of *Wordwise +* are available in quick and friendly form from menus. *Pen-Friend* also offers easier load-

ing and saving of files and a couple of utility routines. The menus are in the fashionable 'pull-down' style, but that's not very relevant. Most of the routines are stored as RFS (ROM Filing System) files containing *Wordwise +* segment programs which are loaded from ROM into segments when needed.


The *PEN command starts up *Pen-Friend* and runs the main menu. The main menu is now stored in segment 0 and is available at any time while editing simply by pressing Shift-f0. Several of the main menu options contain additional submenus for further options.

The *Pen-Friend* routines are usually selected from the main menu which then loads them from ROM into segment 1 and runs them. Options a, b and c can, however, be loaded permanently into segments 7, 8 and 9 (using option d) and can subsequently be called directly by pressing Shift-f7. This gives a big improvement in speed with these often used options as RFS files

JOYSTICKS— THE COMPLETE SOLUTION


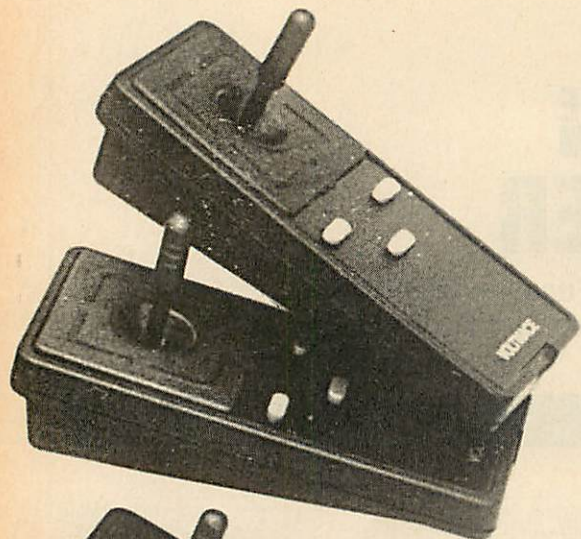


Delta 3B Twin

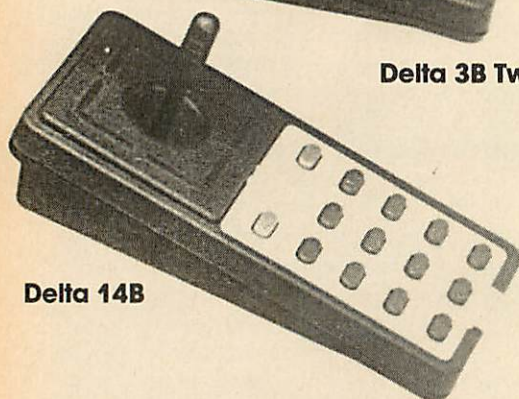

Delta 14B

Delta 14B/1

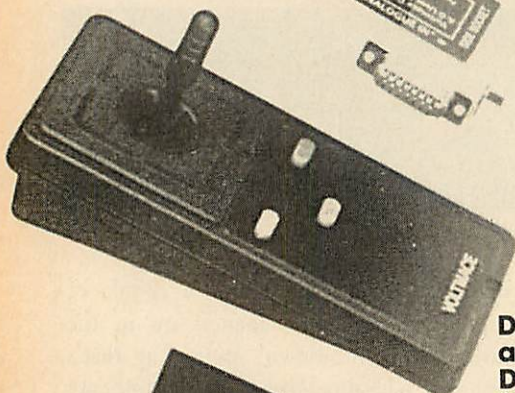

Delta 3S
and
Delta 3B
Single



Datapad 16B

DELTA 3B TWIN—BBC B or ELECTRON PLUS 1 £19.95

A direct but improved alternative for the original ACORN joysticks, with 2 joysticks wired to one plug. As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

DELTA 3B SINGLE—BBC B or ELECTRON PLUS 1 £12.00

A single joystick that in some ways can act as two. The custom made special "low noise" potentiometers are wired so that it will work as a left hand or right hand joystick. It can even run some programs written for two joysticks and has the fire buttons of both.

DELTA 14B—BBC B £14.95

Our original ACORN/BBC handset. The same super light joystick, but the long life buttons, which have been video game tested for many years, increased to 14 in number. A DELTA 14B/1 is needed to run the keypad but a 14B on its own will work as a joystick and fire buttons, so you can always add the 14B/1 to it later.

DELTA 14B/1 for use with 1 or 2 DELTA 14Bs £14.85

DELTA DRIVER CASSETTE £5.95

The A/D/USER PORT interface box. This gives simultaneous access to both the analogue port, for the joystick part and the user port, for the keypad. Two handsets can be plugged into the box giving a total of 24 user definable keys.

Full instructions are provided to include the keypad in your own programs even in BASIC or for the non-programmer a DELTA DRIVER cassette is available with keyboard to joystick/keypad conversions and keypad set up programs.

DELTA 3S (for ELECTRON with switch joystick interface) £12.00

For an ELECTRON with a switched joystick interface (Not a PLUS 1) this gives you the same delightful light, fast action of the DELTA joysticks but fitted with a 9 way D plug as per Atari, Commodore, etc. and will run on First Byte interface or similar.

DELTA ASC/B FOR BBC, DELTA ASC/E FOR ELECTRON PLUS 1 (not illustrated) £9.95

This little box plugs in series with your analogue joystick to alter its characteristics simply by using a switch. In one set up the joystick will act like a switched joystick, i.e. a slight movement will act as if the joystick has been pushed hard over. In the other mode the joystick only covers the centre half of the A/D converter so that it takes twice as much movement to give the same effect. This makes it much easier to make delicate adjustments to programs like flight simulators.

DATAPAD 16B £39.95

A commercial spec. 16 way keypad. Full travel mechanical keys with double shot moulded keycaps mounted in a low profile metal case. The keys are marked with calculator legend, but the software included allows the pad to be defined as any keys, including function keys or single byte VDU commands such as PRINTER ON/OFF. No tampering with the computer as it fits onto the user port.



AA57

Available from your dealer
or direct from us



Voltmace Limited

Park Drive
Baldock
Herts
SG7 6EV
Telephone (0462) 894410

REVIEWS

SOFTWARE

are infuriatingly slow to load. The routines available from the main menu, some of which call up sub-menus, are these:

The routines

Option a inserts print control codes for underline, bold, etc. It uses OPS (output print string) commands so that the effects can easily be reprogrammed for a different printer. It also offers the facility to include the correct RPS (redefine print string) commands at the start of your document to suit your particular printer. The codes for Epson and Brother printers are stored in the *Pen-Friend* ROM and sets of your own codes are easily selected from disc. Codes for the Juki 6100 are given in the manual in a clearly explained example.

Option b inserts embedded formatting commands. Fourteen of the most commonly used commands are offered in menu (\$). *Option c* displays the page formatting values at the current cursor position. Values such as page length and line length can be altered from this menu. Other values such as current page and line are displayed for information only.

Option d as described above loads options a, b and c into segments 7, 8 and 9 for faster use.

Option e shows a list of page format values, allowing you to edit them and then embed them all at the top of your document. As well as the default settings for normal continuous stationery, you can select the values for A4 or A5 sheets with a single key press. This option also allows you to create headers and footers and have the definitions embedded into your document. The header and footer editing is pretty primitive.

Option f reprograms the function keys from definition files you have created on disc or from the default file on the *Pen-Friend* ROM. Again clear examples are given in the manual.

Option g reads your disc or net directory and offers a choice of which file to load. This seems to be done in a 'legal' way and should work with all filing systems (but your disc system must be selectable by *DISC, network by *NET etc.). It is possible, if fiddly, to set up your disc to auto-boot into *Pen-Friend* and start up with option g. A small problem with this option is that the filename you load is not

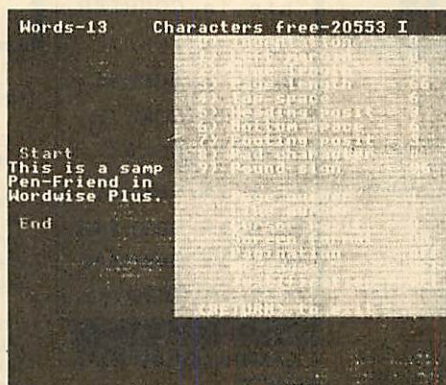


Figure 2. Option c, for page formatting

stored correctly with the result that when you use option h later the version number is not updated properly.

Option h saves your document, automatically updating the version number or letter. Unfortunately it only uses a single character for the version code, following 0 to 9 by A to Z, then a to z.

Option i verifies a saved file against the text in memory. A full comparison would be very slow so only the length and first character of each line are compared. This is still pretty slow as well as being insecure. It is safer to resave a document if you are unsure whether it is saved up to date.

Options j, k and l offer dual column formatting, label printing and display of the first line of each segment respectively. Unexciting, but they work and are useful.

The manual is printed well and generally clearly written with a feature being the excellent examples. A useful technical appendix gives a list of the segments and variables used and other notes.

Many of the default choices can be customised. For an extra payment of £10.50 per ROM you can have your own default choices programmed into the ROM in several places eg, the on-ROM printer definition files in option a can be changed for different printers. This is rather a good idea as most of the benefits of a ROM like this would be lost if the facilities were not instantly and easily available. I suppose larger organisations couldn't offer such personal service but perhaps *Pen-Friend* will set an example.

Compatibility

The ROM is fitted as usual, with the position being immaterial except that the higher its priority, the faster the options

can be loaded. The RFS/segment program format means that *Pen-Friend* should work with all versions of the BBC micro and *Wordwise +*. The way the routines are written also suggests that they should work with any disc filing system. I have tested *Pen-Friend* with various versions of the Acorn DFS and Watford DFS and it seems to perform correctly.

Pen-Friend is claimed to be compatible with Watford's *Word-Aid* package, avoiding segments and variables used by *Word-Aid*. A different version is available which avoids clashes with Norwich's CP-ROM. The standard version uses some of the same segments as Beebugsoft's *Wordease*; in particular option c uses segment 9 where *Wordease* stores its main menu so that will definitely cause a clash (unless you reprogram your copy of *Wordease*!).

There is nothing absolutely earthshattering in this package but most of the options offer simple, useful facilities which take some of the grind out of wordwising. It's quite handy even for old hands like myself but would be most useful for newcomers who haven't learnt the arcane catechism of JOs and EPs nor know instinctively that OC27, 69 produces emphasised print on an Epson. The sloth of RFS files can be a bit irritating at times but with the main abc options in RAM this isn't too bad.

At first glance I felt that the facilities in *Pen-Friend* were trivial and it would be easier to learn the correct commands. Having used *Pen-Friend* while writing this review, though, I have found it eases many trivial tasks and leaves you freer to concentrate on your prose.

Pen-Friend has a different aim to the other *Wordwise* assistants reviewed in the May '86 *Acorn User* in that it only aims to help with normal wordprocessing and not with segment programming. It's reasonably successful in this aim and not too pricey. Combined with *Wordwise +* it creates a friendly and powerful wordprocessor.

Wordwise Training Pack is available from Jordanhill College of Education, 76 Southbrae Drive, Glasgow, G13 1PP and costs £28 (plus £2 postage and packing) inclusive of VAT.

Pen-Friend costs £14.95 inclusive of postage and package with no VAT to pay, from Word Processing, PO Box 67, Wolverhampton, West Midlands.

3 1/2"
'COMPACT'
versions of
CJE software
available
£2 extra.

CJEmicro's

ALL CJE MICRO'S SOFTWARE IS B, B PLUS, MASTER & MASTER COMPACT COMPATIBLE.

ENHANCED!

Multi-Font NLQ

**Converts most printers to
NEAR LETTER QUALITY**
in user definable Fonts.

For EPSON & EPSON Compatibles, including
MX/RX/FX/LX 80/100, STAR DP510/Gemini
10X/SG10/NL10 & Citizen 120D.

Simple to use, standard EPSON codes for Underline and
Doublewidth used.

After initialising Multi-Font NLQ with a *MFNLQ, Multi-Font NLQ
is normally transparent to the user. Multi-Font does claim some
memory for workspace and storing font data.

Multi-Font NLQ comprises of MFNLQ ROM for the BBC, and utility
disc containing the FONT definer, ten fonts, BASIC demonstration
program, VIEW demo text file and Driver.

Multi-Font NLQ is compatible with nearly all software, including
most BASIC programs, VIEW, WORDWISE & InterWORD
(SCRIBE & Printer Buffer software currently not supported).

Ten fonts are supplied or create your own using the font definer
supplied.

Fonts included are:-

Standard NLQ, Courier, Italic, Gothic, CompTS, Bold, Shadow,
Outline, Broadway E, Theatre

Additional Font Disc MF-B contains:-

Hand, Script, Stencil, Broadway, Caps, Italic-Plain, Meccano, Plain,
STD large, Wire, Greek/Maths and Inverse.

For Canon & Taxan Kaga users we recommend FONTAID in
preference to Multi-Font NLQ.

Multi-Font NLQ (ROM and 40/80 Disc)	£30.00
Additional font disc 'MF-B' (12 fonts)	£15.00
Additional font disc 'MF-C' (15 fonts)	£15.00
P & P on MFNLQ	£ 1.00

MASTER Write Protect and ROM select switch.

Two switches set to RAM slots to be:-

Internal ROM or RAM Read and Write or RAM Read only.
£12.00 inc. VAT. P & P £1.00.

This is Standard

This is COURIER

This is ITALIC

This is BOLD

This is COMPTS

This is BOLD

This is SHADOW

This is OUTLINE

This is BROADWAY

This is THEATRE

EXAMPLE OF MFNLQ FONTS

Additional disc 'A' gives an extra 11 fonts including:-
Greek/Maths, Plain, Hand & (Elite, Condensed, & Super Condensed).

Now included is a facility to issue ** commands within a VIEW document.

To download new fonts within VIEW documents, the FONTAID ROM needs to be
fitted in the BBC. (All other FONTAID facilities are available on both the FONTAID
ROM & DISC). Fonts are always downloaded from Disc.

Fontaid is recommended to Canon & Taxan Kaga owners in preference to Multi-
Font NLQ. As downloadable NLQ is a built-in facility of the Printer, full access to all
the printers control codes is still allowed. The resolution of the FONTAID NLQ is
also slightly higher than that of Multi-Font NLQ.

FONTAID requires 6264 RAM chip in printer.

FONTAID ROM & STD Font disc	(40 or 80 track)	£30.00
FONTAID ROM & STD Font disc with 6264 RAM	(40 or 80 track)	£36.00
FONTAID Additional Font DISC 'A' (11 fonts)	(40 or 80 track)	£15.00
FONTAID Additional Font DISC 'B' (13 fonts)	(40 or 80 track)	£15.00
FONTAID Additional Font DISC 'C' (15 fonts)	(40 or 80 track)	£15.00

FONT ROMS of individual fonts are available eg "Square".
P & P on FONTAID

£18.00
£ 1.00

FONTAID

NLQ Definer for Canon & Taxan Kaga NLQ
Printers.

Design your own NLQ Fonts or 'download' one of
our 40+ predefined fonts.

Fonts can be downloaded within Wordwise, Inter
Word or VIEW Documents allowing different
fonts to be used for different paragraphs, or
even individual lines of text. During downloading
your Program or Text will not be corrupted.

On the FONTAID standard font Disk are the
following eight fonts:- Square, Outline, Italic,
Gothic, Computer Type Style, Bold, Shadow,
and Broadway Engraved.

INFORM

A UNIQUE NEW POWERFUL USE FOR SIDEWAYS RAM

INFORM has been developed specifically to take full advantage of the
Sideways RAM facility that many BBC micro users now have. Inform is
compatible with most SIDEWAYS RAM units including ATPL Sidewise with
RAM, Solidisc SWR, BBC B PLUS 128K & BBC MASTER series (not SDL256)

INFORM is a very powerful facility, which allows the user to display text
information, of any kind, from Sideways RAM. This information can be readily
accessed by using ** commands from the keyboard or from application
programs. In this way, much information can be displayed on the screen
without stopping the current task, such as entering text in WORDWISE or
VIEW.

The information in the RAM can be changed dynamically at any time.

Some of the possible applications for INFORM are:-

An on screen help manual can be created for your application, so that a
reminder about more obscure points can be displayed at the users request.
Information on your program or datafile contents, can remind you of their
purpose.

Address and/or telephone numbers can be held and displayed quickly even
while other applications are running. Very useful if you need to quickly display
information about a client while he is hanging on the end of a phone!

Current prices for your products or stock position can be recalled instantly
and readily modified using a wordprocessor. Similar files may be created from
most databases such as VIEWSTORE.

In fact, any information to which you frequently refer can be displayed
immediately without running another program. Your use of INFORM is only
limited by your imagination, as they say!

There are three Inform Data Files (I.D.F.), of often used information, supplied
on the disk to give an indication of the use of INFORM.

To use INFORM you must have Sideways RAM.

INFORM on 40/80 track disc. P & P on INFORM £1.00 £20.00

PRINTERS

NOW FREE DELIVERY on PRINTERS (by courier)

Ring for sample printouts, full specification and latest prices.

Near Letter Quality Printers all with Centronics interface,
Friction and Tractor feed.

Canon 1080/Taxan KP810	£270.00
Canon PW1156A (15")	£414.00
Citizen 120D	£190.00
JUKI 5510	£300.00
JUKI 5510 + colour kit fitted	£420.00
Letter Quality Printer	
JUKI 6100 Daisywheel	£280.00
BBC Cable	£ 8.00

Inclusive of
VAT & Delivery
Ring for
latest prices.

CJE BBC Printer PACKS include:-

CABLE to BBC 1.25M, M/C two tone screen dump, Screen
text dump, Function key set up program, Function key label
printing program, VIEW driver, Character defining program
for downloadable character set (draft mode), 100 sheets of
paper, Mains plug with 3AMP Fuse, Booklet giving
instruction on pack software and general details of using
the printer with a BBC.

C.J.E. BBC Printer Packs are £15.00 cassette (£16.00 disc)
(e.g. CANON PW1080A with Printer pack £270 + £15 = £285
everything included)

TRADE & EXPORT ORDERS WELCOME please inquire for delivery cost.

PRICES INCLUDE VAT

Phone/Credit Card and Official Orders welcome.

Full range of Printer, BBC, AMSTRAD & ATARI accessories available. **Official ACORN approved Dealer.**

C.J.E. MICRO'S (Dept AU12) 78 Brighton Road
Worthing W. Sussex BN11 2EN (0903) 213361

CJEmicro's

**NOW ALSO AVAILABLE FOR THE
MASTER COMPACT**



a bar



The Music System

is the most advanced micro based music program
for the BBC microcomputer

is sophisticated, yet smooth and simple to use
features unparalleled create, edit, play and print
tunes facilities

the Song & Sound Library immediately releases
the flavour of both vintage and nouveau
compositions

the acclaimed Instruction Manual uncorks all the
secrets to its successful and easy use

**LET THE MUSIC FLOW, LIMITED ONLY BY YOUR OWN
TASTES AND IMAGINATION**

BUY THE MUSIC SYSTEM TODAY!

DISC PACK: EDITOR • SYNTHESISER • KEYBOARD • LINKER • PRINTOUT • SONG AND
SOUND LIBRARY • £29.95 INC VAT

CASSETTE 1: KEYBOARD • SYNTHESISER • SOUND LIBRARY • £14.95 INC VAT.

CASSETTE 2: EDITOR • PRINTOUT • SONG AND SOUND LIBRARY • £14.95 INC VAT. PLEASE
ADD £1.25 P&P PER ORDER.

ADDITIONAL SONG LIBRARY DISC: 2 TOCCATA AND CAROLS • 3 400 YEARS OF MUSIC •
4 MAINLY BACH • 5 IAN WAUGH ORIGINALS • 6 OLD FAVOURITES • £4 EACH INC VAT,
POSTAGE FREE.

NEW UTILITIES DISC: • KEYBOARD • MUSIC FILE CONVERTER • PLAY FROM BASIC UTILITY
TMS MUSIC FILE CONVERTER • £6 INC VAT POSTAGE FREE • NOW WORKS ON BBC MASTER,
B+ AND ALL DFS AND DDFS (INC. SOLIDISC AND WATFORD).

ECONET VERSION £89.70 INC VAT PLUS £1.25 POSTAGE. AMSTRAD AND COMMODORE 64
VERSIONS ALSO AVAILABLE.

ORDERS TO SYSTEM DEPT. A, 12 COLLEGIATE
CRESCENT, SHEFFIELD S10 2BA (0742) 682321.

DEALER ENQUIRIES WELCOME



**i. ISLAND • LOGIC
SYSTEM
SOFTWARE**



THE AWARD WINNING GRAPHIC ADVENTURE CREATOR



Will change the face of the
adventure software market.
AMSTRAD ACTION

THE ANSWER TO YOUR PRAYERS!
C&VG

A very clever utility . . .
very easy to use.
KEITH CAMPBELL, COMMODORE USER

Highly recommended.
ACORN USER

A very impressive and
sophisticated adventure generator.
SINCLAIR USER

Now everyone can write professionally
illustrated adventure games.

The Graphic Adventure Creator – THE
adventure writing utility of the eighties.

✱ Unleash the Power of your imagination ✱



AVAILABLE AT ALL
LEADING RETAILERS
or direct from:
INCENTIVE
SOFTWARE LTD.,
2 Minerva House,
Calleva Park,
Aldermaston,
Berkshire RG7 4QW.
Telephone: (07356) 77288.

PLEASE RUSH ME (1st Class Postage FREE)

BBC B & BBC B +

THE GRAPHIC ADVENTURE CREATOR Tape £22.95 ☐
Disc £27.95 ☐
Winter Wonderland graphic adventure £7.95 ☐

ELECTRON, BBC B & BBC B +

THE ADVENTURE CREATOR (text only) Tape £14.95 ☐

The GAC Adventure Designer Pad £7.95 ☐

GAC extra information – free with any order ☐

I enclose Cheque/P.O. for £ or please
debit my credit card No.

Name

Address

MEGABYTE MIRACLES



**ONLY
£209.95**

2 MEGABYTE DUAL DRIVE
5 1/4" double-sided 80/40 track
switchable disc drive. Formatted
capacity with DDOS 1.4 Mb

**ONLY
£109.95**

1 MEGABYTE SINGLE DRIVE
5 1/4" double-sided 80/40 track
switchable disc drive. Formatted
capacity with DDOS 720K

Don't miss this amazing special offer from Opus — a choice of powerful 1 or 2 Megabyte disc drives at simply magic prices.

Choose our 1 Megabyte drive for just £109.95 or 2 Megabyte dual drive offering for only £209.95. Our prices even include VAT and FREE delivery! And, if you need an interface, add just £40 to the cost of either of our special offer drives and we'll supply you with one of the best double-density systems on the market — the Opus DDOS.

OPUS DRIVES

Our 5 1/4" drives are double-sided, 80/40 track hardware switchable models representing the very latest in disc drive technology and offering superb performance. They feature reliable direct drive mechanisms, low power consumption and fast track access times and they're backed by our no-quibble 2 year guarantee.

THE OPUS DDOS

Our highly acclaimed DDOS is probably the most advanced double-density disc interface available and if you choose one of our Megabyte bargains we'll slash £20 off the normal retail price — it's yours for just £40.

Our disc interface uses the same disc controller chip as the BBC B+ allowing you to run all leading software titles — just phone for our comprehensive listing.

The Opus DDOS handles tape to disc transfers, Format and Verify utilities are included on ROM and its powerful machine code operating system gives you up to 248 files — the perfect partner for your new Opus disc drive.

Simply post the coupon or call Opus now on **0737 65080** — we'll guarantee delivery within 72 hours. Our Megabyte Miracles offer is available for a limited period only, so call today to avoid disappointment.

Generous education and dealer discounts available.

To: Opus Supplies Limited, 55 Ormside Way, Holmehorpe Industrial Estate, Redhill, Surrey.
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

_____ 1 Megabyte (unformatted) Systems at **£109.95** each
_____ 2 Megabyte (unformatted) System(s) at **£209.95** each
_____ Opus Double Density Disc Interface at **£40.00** each
(Only when purchased with drive)

I enclose cheque for £_____ or please debit my credit card account with the amount of £_____

My Access ☐ Visa ☐ no. is:

NAME


ADDRESS

TELEPHONE AU12

Opus.

☎ 0737 65080

Your key to communications!

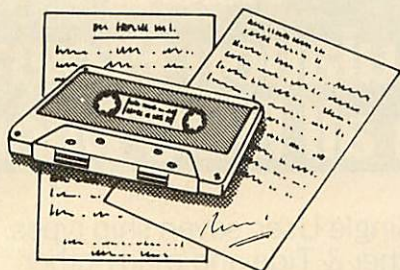

PRESTEL

*PRESTEL is the trademark of
British Telecommunications Plc and Prestel

Micronet 800- The ultimate peripheral

Micronet 800
8 Herbal Hill, London EC1R 5EJ
Telephone: 01-278 3143

FREE Electronic Mail . . . International
Telex . . . 10 National Chatlines (Interactive
Bulletin Boards) . . . 70,000 users across the
UK . . . Teleshopping . . . Multi-User
Interactive Strategy Games

Instant computer news . . . Hardware and
software reviews . . . Technical features . . .
Hints and tips . . . On-line business advice
and features

FREE and discounted quality software to
download direct to your micro - **24 hours a
day**

300,000 pages of information on the huge
Prestel database

To: Micronet 800, 8 Herbal Hill, London EC1
Please send me a brochure on Micronet 800

Name _____

Address _____

_____ Telephone No _____

Age _____ Micro _____

AU/12/86

Do your own typesetting using your Acorn/BBC/Amstrad or any other micro.

No software to purchase – no start-up costs. Easy to use system. Over 150 typefaces and top quality repro from Linotron 202. Afternoon telephone transmission gives next day delivery at a minimum cost **under £3**.

Wordstream Ltd

Victoria Chambers
Fir Vale Road
Bournemouth
BH1 2JN
Tel: (0202)
294347

Please send me details of Wordstream

Name

Address

Postcode Tel

3" HITACHI DISK DRIVES

Suitable for use on the Amstrad 6128, 664, Tatung Einstein, BBC with DFS. 40 track, double density. 3 ms track access time. Unformatted capacity — single sided 250k; double sided 500k. Shugart interface. Plug compatible with 5 1/4 inch drives.

PRICE:
£29.95 + VAT
Single sided
£39.95 + VAT
Double sided



Cables available for connection to
Amstrad — £7.50 plus VAT
BBC — £10.00 plus VAT
Tatung — £10.00 plus VAT

CARRIAGE £2 + V.A.T.

FOR FURTHER DETAILS SEND S.A.E. TO:

MATMOS Ltd., Unit 11, Lindfield Enterprise
Park, Lewes Road, LINDFIELD,
West Sussex. RH16 2LX. Tel. 0444-73830

Or Computer Appreciation,
111 Northgate, CANTERBURY, Kent. CT1 1BH.

A BBC COMPATIBLE TRACKERBALL FOR ONLY £29.95

Full performance optical trackerball with precision bearings, heavy 2 1/4 inch ball and two independent control buttons. Plugs directly into the BBC user port and will also run software intended for other similarly connected trackerballs.



The trackerball comes complete with –

SPLASH!

Superb art drawing program for the BBC Micro

This super-fast machine code program is packed with all the features you need to produce arty Mode 2 screen dumps that you can be really proud of. The on-screen menu makes it easy for even a young child to get excellent pictures, yet the combination of commands available allow you to generate amazing results with no effort at all. Some of the "trick" GCOL effects just have to be seen to be believed. Although intended for computer artistry, this program contains enough geometric and "technical" drawing commands to make it a SPLASH! with every type of user.

- * Circles, ellipses, triangles, rectangles, etc.
- * Brush and line thickness control
- * Fast solid and colour pattern filling routines
- * "Trick" colour effects available on all commands
- * Spray paint, solid or patterned colours
- * Full 16 solid colour operation, plus many pattern colours


Postage and packing £2.00

Please send your Cheque/P.O./Access No. for £31.95 to:
**Datapen Microtechnology Ltd., Kingsclere Road, Overton,
Hants. RG25 3JB. Telephone: 0256 770488.**

SCORPION controller

Only a danger to the unwary

The Scorpion is a new type of control system. It combines the powers of a micro-processor, a 32K language and 36 interface ports in a small self-contained unit. It connects to your computer using the serial interface and can be programmed to perform many control and data logging tasks using its own built-in language. The battery backed memory means that it never forgets, and will continue running even when disconnected from your computer. Scorpion allows you to solve control problems fast, ignore it at your peril.



Features

- 24K Ram, 32K system Rom
- Multi-tasking procedural language
- Battery backed memory
- Clock/calendar
- 240V AC or 12V DC supply
- Works with ALL BBC computers
- Also with IBMs and Nimbus etc

Addons

EV1 vision system, Beastly robot arm, sensors, servos, LCD display, keypad and 8 channel relay driver

On board interfacing

- 8 Analogue inputs
 - 4 Digital outputs
 - Alphanumeric LCD
 - 20 key keypad
 - 2 Shaft encoders inputs
 - 16 Beastly servo outputs
 - Serial interface
 - User port
 - I²C port to 64 digital and 32 analogue IO lines
- £249.00 +vat
Access orders welcome

MICRO-ROBOTICS LTD

264 Newmarket Road, Cambridge CB5 8JR Tel: (0223) 323100

Radar Simulation Programs on all BBC Micros

MK I

For Single User, seven ship types. Weather & Tide and many other realistic features – **£40 + VAT**

MK II

Two Station System for Instructor and Student. As above, but including ARPA facility, Printer Log and Instructor controlled targets – **£80 + VAT**

MK III

Full scale simulation with Master Control Station and up to 27 'own ship' stations. Designed for use by Nautical Training Colleges, Navies and organisations carrying out Radar Training Courses – **£5,000 + VAT**

SEA INFORMATION SYSTEMS LTD. · PORTVIEW HOUSE
25 PORTVIEW ROAD · AVONMOUTH · BRISTOL · BS11 9LD
TELEPHONE: (0272) 824369 · TELEX: 44220 COMTEL G.



BUSINESS

NEWS

Master accounts

Context has released a new version of its *Bank Manager* accounts program. The *Master Bank Manager* supports both the ADFS and sideways RAM, and has further search and reporting facilities it only operates on the Master 128, Compact and B+128 micros and costs £22.50. Context, 15 Woodlands Close, Cople, Bedford MK44 3UE.

Business book

Small business owners will find help putting their micro to work from a new book: *Using Computers for Business Success*, written by Enid Mumford, a professor at the Manchester Business School, which publishes the book. MBS, Booth Street West, Manchester M15 6PB. Tel: 061-273 8228.

Printer control

A new ROM helps BBC micro users with Epson-compatible printers. R Johnson's *Printer Utility* ROM replaces complex code sequences with star commands such as *ITALICS.

The 16k ROM is £11, and a disc for sideways RAM retails at £7.50. Contact R Johnson, 42 Brackyn Road, Cambridge CB1 3PQ.

Master: no price cut

by Geoff Bains

Acorn is holding firm on Master 512 prices, despite recent IBM PC-compatible reductions. Even though complete PCs, compatible with IBM's, are available for £300, Acorn insists that the £399 Master upgrade and the Master 512 at £900 are 'still good value' and has 'no intention' of cuts. The Master 512's slight incompati-

bilities with IBM PCs mean that much popular PC software will not run, although this is slowly changing.

Acorn has a loader program to enable the *VP Planner* spreadsheet to operate on the 512 and *dBase III* is now available in an unprotected form, primarily to ease software transfer to hard disc but with the spin-off of allowing it to

work on the Master 512.

Acorn claims over 1500 Master 512s have been sold, and 'people still want them'. However, many dealers seem unhappy and prefer to recommend cheaper IBM PC compatibles. Technomatic had sold 50 512s and was disappointed by the machine. A spokesperson from the company said there 'is not enough software'.

Mega-ROM from Computer Concepts

Computer Concepts is to produce a Master 'Mega ROM' of its own. A cartridge containing the entire *Inter* range of software - *InterSheet*, *InterWord*, *InterChart* and *InterBase* - will be produced 'just as soon as *InterBase* is finished', said Ian Bishop of Computer Concepts.

It is unlikely the cartridge will be available before the new year as *InterBase* has 'a long way to go' stated Ian Bishop. It was recently decided to increase the ROM size to 64k to provide more functions.


The 'Mega' cartridge will be

produced for the Master 128, and probably the Compact too (sitting on the expansion connector), with a 128k ROM that appears to the micro as just one 16k chip, taking up only one ROM bank.

It will retail at £150, with sizeable discounts for existing *Inter* software owners at 25 per cent off for each package exchanged, up to a maximum of three packages.

Contact Computer Concepts, Gaddesden Place, Hemel Hempstead, Herts HP2 6EX. Tel: (0442) 63933.

Buffers



Micro users with extra printers can use switching units to end plugging and unplugging.

Micro Control System's X-Buffer has both serial and parallel inputs, and can connect to serial and parallel printers, plotters or modems. It can also enable two computers to share one output device, or can be used as two buffers. The base costs £129. A 64k, buffer RAM is £30; there are others to 512k at £220. Electron House, Bridge Street, Sandiacre, Nottingham NG10 5BA. Tel: (0602) 391204.

Downsoft's switching unit also has a buffer, and up to three parallel printers can connect to one computer. As for the X-Buffer, route selection is by switches or software codes. The 64k unit costs £199 and the 256k, £229. Downsoft, Depot Road, Epsom, Surrey KT17 4RJ. Tel: (03727) 42696.

BUSINESS TOP FIVE

Title	Publisher	Cassette	Disc	ROM	Electron B+	Master 6502	Econet
1 ViewSheet	Acornsoft	—	—	£59.50	£29.95	Yes	Yes
2 Datagem	Gemini	—	—	£39.95	—	Yes	Yes
3 Office Master	Gemini	£25	£25	No	*	No	*
4 Desk Diary	Acornsoft	£6.99	—	—	Yes	—	—
5 Database	Gemini	£19.95	£23.95	—	—	Yes	Yes

Compiled by Gallup/MicroScope. Contact publishers: Gemini, Gemini House, Dinan Way, Exmouth EX8 4RS. Acornsoft 645 Newmarket Road, Cambridge CB5 9PD.

Abbadish

Computer Services

*** LIMITED OFFER ***

CITIZEN 120D PRINTER

ONLY £139.95 (a)

+ centronics I/F 29.50, + serial I/F 30.50

Master 128	395.00 (a)	Direct Disk Drives:	
Turbo Upgrade	105.00 (b)	400k 80/40	108.95 (a)
Master Compact	375.00 (a)	800k 80/40	209.95 (a)
Compact + mono/mon	389.00 (a)	400k 80/40+PSU	121.00 (a)
Compact + col/mon	585.00 (a)	800k 80/40+PSU	229.95 (a)
Mannesman MT80+	168.00 (a)	Quen Data 1120	154.00 (a)

All prices Excluding VAT Delivery: (a) 10.00 Carrier (b) 2.50

Prices subject to change without notice.

*** 24 HOUR ANSWER SERVICE *** 024368 3318

Standard VISA/ACCESS Order form, please.

Abbadish Ltd
Walden School Lane
Eastergate
Chichester
W. Sussex PO20 6UU.

Termite

BBC μ

Precision Analogue Control Station

- Precise action Joystick utilising an entirely electronic angle sensing technique.
 - Low friction – Backlash free – Self centering.
 - Zero sensor wear rate.
 - Outstanding durability – Lifetime 10 Million cycles.
 - Span Set Controls – Movement sensitivity adjustable within a nominal 0.5 to 2.0 range – X and Y axes independent.
 - True centre zero adjustment – Calibration program included.
 - Converter reference lock eliminates stick drift.
 - Twin auxiliary rotary controls allow additional parameter adjustment within running program – Fine resolution plastic track potentiometers – Double as second joystick channel.
 - Remote Fire and Secondary buttons in compact handheld unit on coiled cable – Positive switch action.
 - Analogue Port connection – Standard configuration – BBC powered.
 - Robust aluminium and steel case in BBC colour – Utility handle.
 - Compatible with all BBC models.
 - Applications: Industrial – Educational – Serious Home User.
 - Full technical and application details supplied – available separately on request.
- Price: £109.00 (incl. p. & p.). Please allow 28 days for delivery
Cheques should be made payable to: Wee Beastly Electronics.



Wee Beastly Electronics

30 Gladstone Avenue Loughborough
Leicestershire LE11 1NP Tel: (0509) 236805

contex

computing

BANK MANAGER for disc systems only

The most advanced and versatile personal bank account management program available for all BBC computers. Consistently acclaimed!

"data entry is a delight... professional... excellent product" Micro User April 86

Enter cheques and receipts. Standing orders any frequency. Automatic date sequencing. Reconcile statements. Search, amend and delete. Unreconcile. Move forwards or backwards. Analyse expenditure. Forward cash flow forecast. Up to 36 simultaneous 'bank' (bank, credit cards, savings, cash) accounts online simultaneously, inter-account transfers, 9999 standing orders, 99 analysis categories, 12 actual and 12 budgets per category, over 4,000 postings on an 80k disc. Reports to screen or printer. Graphics. Foreign currency support. Password. File recovery. Auto exec file. Field editing. Itemised look ahead. Programmable report writer.

Standard Bank Manager for the BBC B, B+ £17.50

BANK MANAGER MASTER for disc systems only

Version 2 now available. Includes all of the facilities of the Standard Bank Manager plus ADFS file system support, shadow screens, uses sideways RAM, 40 or 80 column screen reports, improved graphics, m/c windows, function key support and onscreen labels, additional functions added to the already extensive report facilities.

Bank Manager Master for the MASTER and MASTER COMPACT £22.50
Upgrade from standard, return original disc and £6.00

BANK MANAGER BUSINESS UTILITIES for disc systems only

For the 'professional' who also use the BANK MANAGER to control the business accounts the BUSINESS UTILITIES add double entry trial balance and programmable spreadsheet analysis reports. Generated from cheque and cash transactions keyed into BANK MANAGER. Just pass the reports to your accountant! Use with either standard or master/compact version.

Bank Manager Business Utility Pack 1 £12.00

TYPING TUTOR

Quickly learn to touch type. Over 90 smoothly graded lessons graduate you from the basic home keys to complete keyboard mastery. Unique word scan line checking. Target WPM and percentage correct. You may revise the targets or lessons as required. Audio key click for positive key depression. Establish a typing rhythm using the automatic metronome. Free format option. Recommended.

for BBC B, B+, Master and Compact; Cassette £9.50, Disc £12.50

ALL PRICES FULLY INCLUSIVE. FREE POSTAGE WITHIN UK.

Enquiries and Access Credit card orders telephone 023 03 347

CONTEX COMPUTING 15 Woodlands Close, Cople, Bedford MK44 3UE

Please rush me on cassette/disc

☐ 40k ☐ 80k ☐ 3.5" ☐ 5 1/4" ☐ DFS ☐ ADFS

I have a BBC: ☐ B ☐ B+ ☐ Master ☐ Compact.

Enclosed £ or debit my Access card no.

Name

Address

AU 12

FAST DELIVERY

FOR COMPACT

A LOW COST DISC BASED

PROFESSIONAL ACCOUNTING PROGRAM

For The BBC Computer

"Micro-Trader"

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" Sales and Purchase Ledger Transactions are updated to the Nominal Ledger.

"Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of 450 accounts and 3000 transactions per month in each Ledger.

Normal Income, Expenditure, Assets, Liabilities & Journal Posting in the Nominal Ledger with full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

"MICRO-STOCK"

Stock Control program, fully integrated with "Micro-Trader". 4000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.

£75.00 + V.A.T.



NEW "MICRO-MAILER"

A Mailmerge program, fully integrated with "MICRO-TRADER" With a user Database.

£30.00 + V.A.T.

PHONE TODAY FOR A FREE FACT SHEET

MEADOW COMPUTERS

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (025682) 2008

Account to five

Gemini's *Integrated Accounting System* has been taken over by Home and Continental Computer Services and is being sold in an updated form as the *Interchange Accounts* suite. HCCS, who wrote the original package three years ago, claims it has outsold all other accounting packages. It comprises five modules, Nominal, Purchase and Sales Ledgers, Stock Control and Payroll.

Improvements include automatic integration of data from one module to another, increased capacity and improved manuals. The improved Interchange modules are available on ROM or disc for £49.95 a time. The ROMs are special format requiring HCCS's ROM box (£20) which plugs into the 1MHz bus.

Further details from HCCS, 28 Hitchin Street, Biggleswade, Beds. Tel: (0767) 318844.

Cross-formatting


Peartree has produced a utility to copy files from BBC micro discs to other formats.

Doscopy is available in three versions. The BBC-MSDOS version (£14.95) copies BBC micro files to IBM PC format and vice versa. *Torch Doscopy* will handle Torch files and *CP/M Doscopy* for CP/M micros; they cost £12.95 each. Contact Peartree, 14 George Street, Huntingdon, PE18 6BD.

Make the switch

Craft Data is offering a range of printer switching units without buffer memory or software selection. A two-way serial unit costs £30 and for parallel printers the price is £35.

Craft Data, 92 Broad Street, Chesham, Bucks.

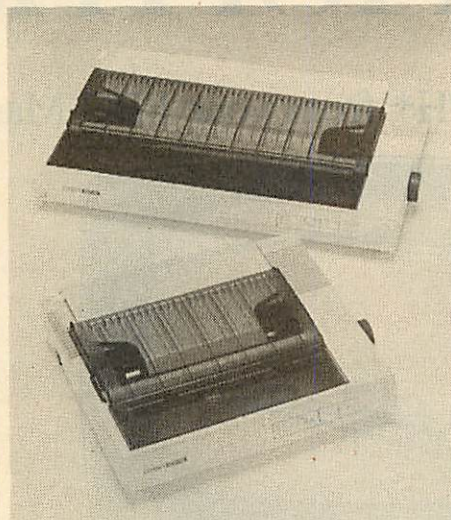

The MSP 15E (top) and MSP 10E, two of Citizen's new models. Above: the Epson LX-86

New printers galore

The flood of new printers continues unabated.

Epson has replaced the LX-80 NLQ printer with the faster and IBM compatible LX-86. The new model is 20 per cent faster in draft mode, capable of 120 characters per second (cps), and otherwise identical. The LX-86 costs £275.

Citizen has added three models to its range. The MSP10E is a near letter quality (NLQ) printer capable of 160 character per second in draft mode and 40 character per second in near letter quality mode. The MSP10E is fully Epson and IBM compatible and costs £349.

The MSP15E is a wide-carriage version able to take 16in wide paper. It costs £449.

At the top of the range, Citizen's HQP 45 is a wide-carriage machine with a 24-pin printhead. It can print in three modes. In draft mode it manages 200cps, in the higher quality 'memo' mode, 132cps and in 'letter quality' mode, 66cps. The HQP 45 is Diablo compatible and costs £914 including

VAT. An add-on card giving Epson compatibility is expected soon.

Canon has replaced its popular PW-1080 NLQ printer with a new model. The A-50 is very similar to the old model but faster (180cps in draft mode and 34cps in NLQ mode) and capable of italic NLQ printing. The A-50 costs £379 and the wide carriage A-55 costs £499.

Texan has updated its KP-810. The only difference in the new KP-810PC+ is the controlling software inside the printer. However, it is now IBM compatible (with 255 characters available without the Epson-type nationality selection), capable of more printing effects and faster. The KP-810PC+ can print in draft mode at 160cps and in NLQ mode at 34cps. It costs £349.

Samleco, a small British printer manufacturer, has released the DX-86. This is capable of 120cps in draft mode and 35cps in NLQ mode. The DX-86 costs £241.

Finally, Pragma's P1013, christened the Personal Line

Printer, offers near letter quality printing at twice the quality of standard dot matrix printers, such as Epson's LX-80, and at a faster speed.


The P1013 produces NLQ characters made up from a matrix of 18x35 dots - nearly twice as many as the Epson LX-80. It is claimed to print text at 134 lines per minute in draft mode and 47 lines per minute in NLQ mode (about 180 and 60 characters per second, respectively) compared to the LX-80's 100cps in draft mode and 16cps in NLQ mode. It can emulate Epson, IBM and Diablo control code standards.

The printer operates in a different way from other dot matrix printers. Its printhead has a horizontal line of 24 pins spaced across the page and prints one complete line of dots at a time.

Two text fonts, Elite and Pica, are held in a plug-in cartridge and further cartridges are expected. The P1013 costs £745 from Pragma, Radlett Road, Colney Street, St. Albans, Herts, AL2 2EP.

How to upgrade your performance

(and get more MPH* from your BBC Master)

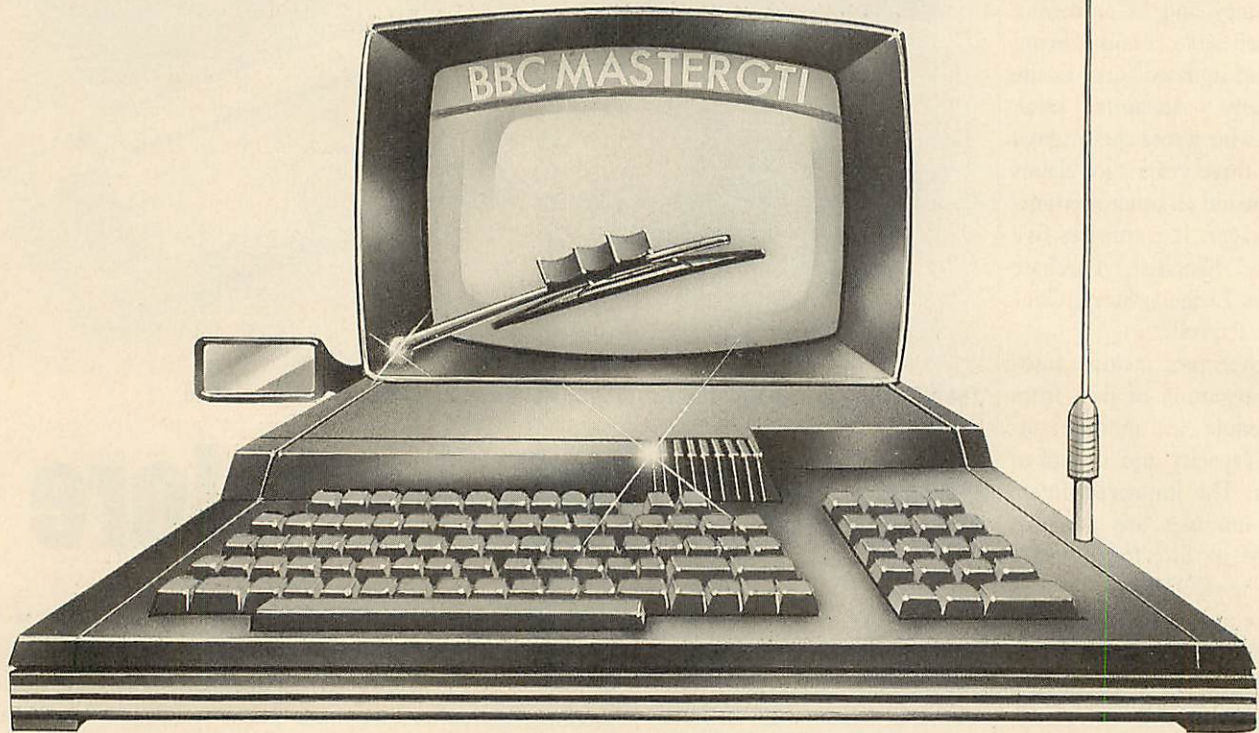

Most enthusiasts have to start at the bottom. Beginning with the basic model, whether it's a motor car or a microcomputer, is usually a financial necessity.

Those who stick with it soon feel the need to move on to bigger, better and quicker things. With the new range of go-faster accessories from Torch Computers you can customize your BBC Master (B or B+) into a fully communicating workstation, a versatile networked system or a complete business machine.



Lots more MicroProcessing Hours* for your money!

Our high specification, low cost range of bolt-on

goodies has options to suit every need and pocket.

The ZEP 100, for example, offers vastly improved processing speed plus access to a wide range of off the shelf software such as Wordstar, DBaseII and Supercalc. You can use professional programming languages like Cobol, Pascal, 'C' and Fortran with the option of switching back to BBC BASIC at any time.

To test drive the Torch BBC Master series contact your local dealer now or write to the address below for a copy of our latest catalogue. It's a winner. **TORCH** 
COMPUTERS

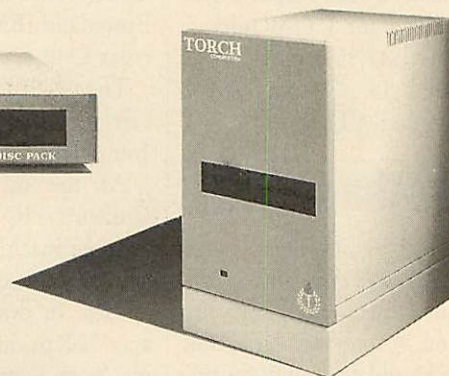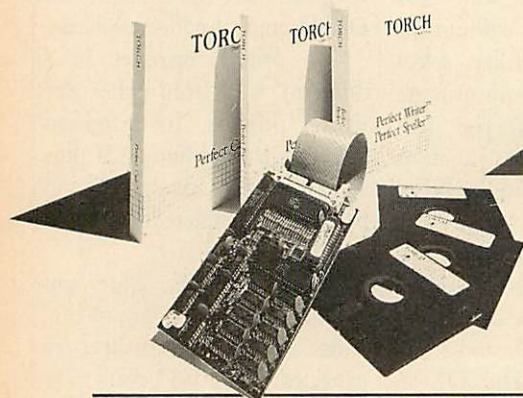

Specifications: **ZEP 100** PROCESSOR Z80 RUNNING AT 4MHz □ RAM 64k ACCESSIBLE THROUGH EXTENSION PROCESSOR □ FIRMWARE CCP ROM ON ZEP 100 CARD & MCP ROM FOR BBC MASTERCARD □ POWER SUPPLY SHARES BBC MASTER □ OPERATING SYSTEM TORCH MCP COMPATIBLE WITH CP/M OPTIONAL UCSD p-SYSTEM □ MRRP £229. **ZEP 240** MAIN SPECIFICATION AS ZEP 100 □ FLOPPY DISK DRIVE 2x5¼ DOUBLE SIDED (FORMATTED) 400Kb EACH □ MRRP £499. **HDP Z80** MAIN SPECIFICATION AS ZEP 100 □ HARD DISC 20Mb WINCHESTER □ FLOPPY DISC 1x5¼ DOUBLE SIDED (FORMATTED) 400Kb □ MRRP £1560
ALL PRICES EXCLUDE VAT


BUSINESS

PUTTING PRINTERS TO THE TEST

In the second of our series on printer reviews,
we examine the Centronics GLP II

Martin Phillips

Continuing our series of printer reviews, this month we take a look at the Centronics GLP II. It was put through the same benchmark tests as those reviewed last month. The first benchmark test prints a series of concentric circles, the second prints out all the type styles available and finally the third prints out near letter quality (NLQ) type. Last month's yellow pages carry the program listings to enable you to do these tests.

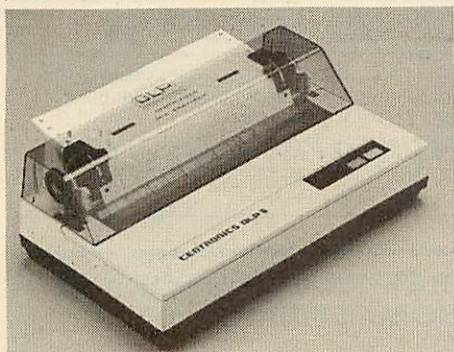

The Centronics GLP II printer

Centronics GLP II

Target price: £160 (£6 for tractor feed)

Benchmark 1: 1 min 3 sec

Benchmark 2: 5 min 35 sec (partial failure)

Benchmark 3: failed

Features: Epson and IBM compatibility. Has both serial and parallel interfaces as standard.

Handbook: The handbook follows the traditional Epson style. Hence it is difficult to follow for the average user, and program listings are given in Microsoft Basic and not BBC Basic. A weakness is the lack of an index or a summary section, making

quick reference very difficult indeed.

This printer has a very flimsy construction and the plastic case and covers are thin. Sockets are mounted on the circuit board, and this flexes alarmingly when the connecting lead is inserted. The on/off switch is at the front which is useful, and there a power light plus lights to indicate when the printer is plus on line or in NLQ mode. They can only be seen when looking directly over the printer.

On unpacking the printer, the first thing that is necessary is to alter the dip switches to get line feed. There is a very fiddly celluloid cover to be removed, and I spent ages trying to get the two rows of 10 switches set correctly. This was partly because I did not look carefully enough at the handbook where the diagrams do show that the left hand bank of switches is number two and not number one as you would expect, and that the switches are numbered from right to left. As you only set these once, it is a minor niggle. The printer is quiet in operation, similar to the printers so far reviewed.

It also failed two of the three benchmarks. Although it will do italics, on the benchmark coding, the italics font was not produced. Thus it would seem that italics will not work with a variety of other print styles. No mention of this was made in the handbook. The emphasised and expanded text have rather a crude chunky look. A particularly bad point is the small line at the top of 'i' and 'l'. This makes the 'l' look like a '7'. The NLQ mode was most disappointing. The text was clearly dot matrix, lacking the quality of the Star (see last month's issue), and the only effect that worked in NLQ was the expanded mode. Having said that, I found the NLQ style large and easy to read.

I was disappointed by this printer. It looked and felt cheap and lacked versatility. The print styles are poor and the handbook assumes that the reader has a degree in computer science.


See the November 1986 issue of Acorn User for reviews of the Epson LX80, Star NL-10 and the Citizen 120D. The December 1985 issue gives guidelines for buying a printer.

Pica
Pica compressed
Pica emphasised
Pica compressed emphasised
Pica double-strike
Pica compressed double-strike
Pica emphasised double-
Pica compressed emphasised
Pica expanded
Pica compressed expanded
Pica emphasised
Pica compressed
Pica double-
Pica compressed double-
Pica emphasised
Pica compressed
expanded
Pica italics
Pica compressed italics
Pica emphasised italics
Pica compressed emphasised
Pica double-strike italics
Pica compressed double-strike italics
Pica emphasised double-

Benchmark 2. Different type styles

Pica
Pica compressed
Pica emphasised
Pica compressed emphasised
Pica double-strike
Pica compressed double-
Pica emphasised double-
Pica compressed emphasised
Pica expanded
Pica compressed
Pica emphasised
Pica compressed
Pica double-
Pica compressed
Pica emphasised
Pica compressed
expanded
Pica italics
Pica compressed italics
Pica emphasised italics
Pica compressed emphasised
Pica double-strike italics
Pica compressed double-
Pica emphasised double-
Pica compressed emphasised

Benchmark 3. Near letter quality type

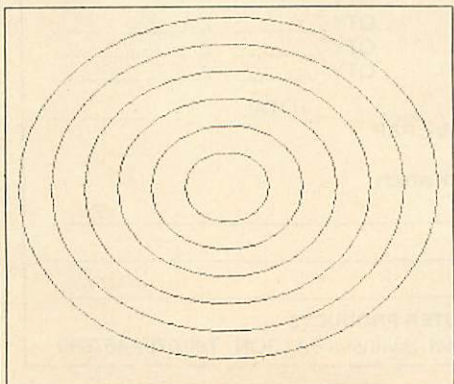

Benchmark 1. Prints concentric circles

INFORMATION PROCESSING ON YOUR BBC COMPUTER!

WHY SHOULD THE BIG BOYS GET ALL THE INTEGRATED SOFTWARE?

For serious users of the BBC computer. Disc machines only.


What the reviewers say:-

DATASCRIBE IS BRILLIANT VALUE FOR MONEY —

John Vogler, A & B Computing, Sept 1985.

I SHALL USE SCRIBE FOR MOST OF MY WRITING —

John Dawson, Your Computer, Feb 1985.



SCRIBE £39.95

THE PROFESSIONAL WORD PROCESSOR designed for the serious user
★ All operations fully prompted ★ No special knowledge of the computer system necessary ★ Document size NOT limited by computer memory ★ Automatic disc buffering ensures text is moved between disc and computer memory without user

intervention ★ Up to 255 pages in a single document ★ 80 column display ★ On screen underline and right justify ★ See it as it will be printed. SCRIBE comes in a chip with 5 minute fitting instructions, utilities disc and manual. Integrates with Database.




DATABASE £49.95

A superb record keeping system with an incredible operating speed. 96 fields per record ★ One record 2 Kb max ★ One field 900 characters max ★ 4000 records per database ★ 16 level conditional search ★ Record match ★ 8 automatic sub indexes ★ Total flexibility of output via report writer with ability to write back to the database ★ Maths


pack ★ Semi programming language plus compiler. Integrates with Scribe to give conditional search with MAIL MERGE and high powered report formatting. Comes in ROM.

DATASCRIBE £69.95

Scribe & Database in a single chip! Contains all the features of both products and with an attractive saving on price and ROM space.



DOUBLE-DOS £45



Double density disc interface. A high capacity database or word processor is enhanced even further with this state of the art disc interface. The many features include ★ 720 Kb of CONTINUOUS file space on a standard 80 track disc drive ★ Automatically read standard Acorn files ★ Compensate for discs formatted in single density ★ Provide up to

159 files IN ONE DIRECTORY ★ Automatically read, write and format double sided drives to appear as one disc surface ★ Allow maximum use of MERTEC Scribe and Database. Very easy fitting — no soldering — full instructions provided.


SCRIBECHEC £24.95

TYPING/SPELLING CHECKER.

The fastest typing checker available. ★ 7200 word base dictionary in ROM plus room for your own 15,000 (approx) word dictionary on disc ★ Any number of dictionaries ★ Maintenance includes add and delete, list words between alpha limits and many more features ★ Check speed 1500 words per minute! ★ Any document length. Also available for wordwise & view.



DATASTAG £49.95



STATISTICS AND GRAPHICS PACKAGE. (ROM BASED)

Coming soon. A highly professional system which integrates with Database. Allows you to store your data in any format and, using Database, present all or selected items of data for graphing and statistical analysis ★

Graphs include Pie, bar, histograms, line plot, scatter plot ★ Display between one and four graphs simultaneously ★ Automatic scaling and direct digital readout of graph co-ordinates ★ Statistics include all standard tests plus linear regression and correlation etc ★ seven non-parametric tests ★ Epson screen dump included with facility to add your own printer dump.

MINI ROM BOARD £14.95

Provides four extra ROM sockets. Easy fitting and without any of the overheating and space problems associated with large expansion boards. **FOR BBC MODEL B ONLY**

SPECIAL COMBINED PACKAGE OFFER

Datastag & Database (in one chip) ☐ £69.95

NEW MERTEC TITAN CHIP FOR THE BBC MASTER 128

Six integrated packages with one chip! £95

WORD PROCESSOR DATABASE STATISTICS
GRAPHICS SPELLING
CHECKER FOR SCRIBE
CHECKER FOR VIEW

TITAN USES THE ADFS AND REQUIRES A DUAL DISC DRIVE.
BBC MASTER NETWORKING ENQUIRIES WELCOME

Prices include VAT. Add 60p post and packing to your order. Discounts on Dealer and education application



MERTEC COMPUTER PRODUCTS

Please supply the following products/information. Please tick box.

SCRIBE <input type="checkbox"/>	QTY _____	£ _____
DATABASE <input type="checkbox"/>	QTY _____	£ _____
DATASCRIBE <input type="checkbox"/>	QTY _____	£ _____
DOUBLE DOS <input type="checkbox"/>	QTY _____	£ _____
SCRIBECHEC <input type="checkbox"/>	QTY _____	£ _____
DATASTAG <input type="checkbox"/>	QTY _____	£ _____
TITAN <input type="checkbox"/>	QTY _____	£ _____
MINI ROM BOARD <input type="checkbox"/>	QTY _____	£ _____

TOTAL _____

I enclose £ _____ Inc P&P
My credit card No. is _____
Visa ☐ Access ☐ Tick which

Name _____

Address _____

To MERTEC COMPUTER PRODUCTS
33/36 Singleton Street, Swansea SA1 3QN. Tel: 0792 467980

IMPORTANT NOTE: Please check with us if you decide to use any other disc interface than Acorn or Double-Dos with Scribe or Database.

BUSINESS VIEW IN FOCUS

The Master 128 and Compact User Guides' coverage of *View* is scanty. Here we provide the new user with some guidelines

Clive Williamson

A bonus for anyone buying the Master 128 or the new Master Compact is the inclusion of some of the *View* family of software. Both machines come with the *View* wordprocessor, and the Master 128 has the added attraction of the *ViewSheet* spreadsheet as well. But because the space available to describe the software in the user guides for the two machines was limited, the supplied documentation is rather scanty, to say the least. So new users should find the following collection of hints about *View* helpful.

Creating a 'Start' file

View's default page settings allow four lines either side of the 'header' line at the top of the page, and a similar configuration round the 'footer' line at the bottom of the page. This may be suitable for some applications, but the total of 18 lines is often too many to leave blank on a page. Thus it's a good idea to design your own page layout using the Top Margin (TM), Header Margin (HM), Left Margin (LM), Footer Margin (FM) and Bottom Margin (BM) stored commands, and save this as a file on its own under the name 'Start'. Thus there is no need to type in all the commands each time you begin a new text file – you simply load in the Start file and off you go! The final result may be similar to figure 1.

It is useful to include your usual text ruler in the Start file, whether it be the default mode 3 ruler, for example, or one you have designed yourself; you can then be sure that your results will be absolutely consistent. The example shown in figure 1 sets the page length to 70 for A4 paper (*View*'s default setting is 66 lines to a page, suitable for 11in paper). A line is included to define the header (DH) using a left, centre and right component, separated by slashes. The last but one line sets the page numbering register to one, while the Define Footer (DF) line prints the page number at the foot of each page.

If you are saving your files on disc, you will find that the Screen, Print and Sheets commands used to preview and print the text will work when several different file-



View is a useful wordprocessing package but not explained well in user guides

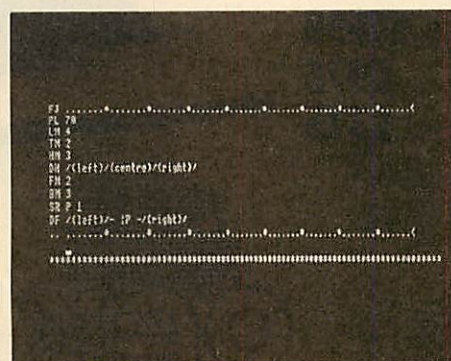


Figure 1. A useful start file

names are entered consecutively after the relevant command. Up to 33 are allowed – as long as each file name is only one character long, since the names must all fit on one line of the screen display. The following example would print FILE 1, FILE 2 and FILE3 one after the other:

PRINT FILE 1 FILE 2 FILE 3 Return
Any page numbering, headers, footers and other formatting details specified in the first of the files will be maintained throughout, unless you alter them in a subsequent file.

The text will be printed without a break from one file to the next unless you deliberately include page eject (PE) commands at the end of each file. The only

precautions you must take are to ensure that the use of rulers is compatible through all the files to be printed, and to put a Page Eject command at the end of each file if you wish the next to begin at the start of a new page.

This technique can be extremely useful if you need to make a document up from standard sections, or if your files are broken up into sections as a result of memory constraints.

Printing several identical copies

You may wish to print several copies of the same document, and although *View* does not specifically ask how many copies you require at the print out stage, it is possible to make multiple copies nevertheless.

You simply specify the same name over and over again when entering a list of files to be printed using PRINT or SHEETS, and *View* will reprint the same file each time. Thus if you give the file a single character name you can print up to 33 copies in one go, this is the maximum number of separate characters that can follow the abbreviated printing commands on one line.

If you are not using footers in your document, you will probably have to in-

THE OAK PROFESSIONAL COMPUTER MASTER RANGE



**Unbeatable performance
and prices to match!**



- ★ M Range from **£495**
- ★ Mt Range from **£595**
- ★ Communication Range from **£1125**
- ★ Z Range from **£1100**
- ★ Scientific Range from **£1899**
- ★ IEEE Controller from **£975**
- ★ Network Terminal from **£375**

All prices shown above are exclusive
of carriage and VAT.

Optional keyboards



For further information of the complete
range please complete and return the coupon.



COMPUTERS

Oak Computers, Cross Park House,
Low Green, Rawdon, Leeds LS19 6HA.

OAK COMPUTERS, Cross Park House, Low Green, Rawdon,
Leeds LS19 6HA. Tel: (0532) 502615. Telex 51311 Relays G.

Please send me details of the Oak Ranges.

My main use is:

Home ☐ Business ☐ Scientific ☐ Education ☐

Name:

Address:

.....

.....

Postcode:

clude a Page Eject (PE) command at the end of the text, to ensure that each copy begins on a new page. A useful precaution if you are using automatic page numbering is to include a command to reset the numbering to one (or the required start number) at the start of each file. For example:

SR P 1

If you fail to do this, the page numbering becomes cumulative when printing.

Wrong format on the first page?

Sometimes when you are using headers and/or footers in your text, you can find that the first page looks all wrong. This is usually because you have left a blank line or some text at the top of your file, before the header and footer details. This can result in a first page without the expected formatting, or a complete blank page for no apparent reason. To cure the problem, delete any blank lines above the header and footer definitions, which should be right at the top of the file, and move any spurious text below your stored commands.

Which disc filing system?

Disc drives on the Master 128 can be run with either the standard disc filing system (DFS), or the newer advanced disc filing system (ADFS). The Master Compact comes with the ADFS only, although a DFS chip can be installed if required. The DFS and ADFS are fundamentally different in the way they store data on the discs, and so they are not directly compatible. The double-density ADFS discs are capable of storing a virtually unlimited number of files in a 'hierarchical' directory structure, rather than the 31 files per drive supported by the single-density DFS.

The structure of data storage under the ADFS is known as a hierarchical one because the system begins with one major 'root' directory (the '\$' directory), and this can contain up to 47 files or directories, and each of the directories can contain 47 more files or directories, and so on. The theoretical picture of all this is rather like the branches of a tree, and the complete path to your file through each directory must be quoted, so that the ADFS can find the right program.

Despite being a little more complex in use, the ADFS is far more versatile than the DFS, and much better suited to storing large numbers of short files such as letters or invoices. It is also recommended for working with the *ViewStore* database, so new users would be well advised to get

used to the ADFS as soon as possible. Especially as the ability to use up to 10 characters to name the files in the ADFS certainly helps to identify the file's contents more clearly than the seven allowed by the DFS.

When working with *View* or *ViewSheet*, it is sensible to have a main directory (eg, 'Viewfiles') to store your work in, then use the *DIR command to give you fast access to it, ie:

*DIR VIEWFILES

will set the current directory. Then you can use the Name command in *View* or *ViewSheet* to name the file you are working on. To save the data you simply enter SAVE, or even the SA abbreviation, each time. All this gets round the need to enter the full specification for the file each time, which would be:

\$.VIEWFILES.filename

in this case. Make sure you don't end up with too many sub-directories giving long routes through to frequently-used files, as this can be very time-consuming. A little thought about disc storage can save you a lot of waiting.

Speeding up your work

A number of short cuts are made possible by the nature of the wordprocessor software and the computer itself. For example, *View* contains commands to help you look for specific words or phrases, or markers set within the text.

It also allows abbreviations for some of the commands (eg, PRINT becomes P; LOAD is L) and, as you have already seen, the version of *View* in the Master machines lets you pre-define the name of the file you are working on, so there is no need to keep typing it in each time you save the text.

It is particularly easy to save paragraphs or large sections of text that you need to use time and time again, and read them into a new file whenever they are required. The BBC micro itself contains commands that can speed up the cursor movement as you gain confidence, and you can also make use of the red function keys to store often-used commands or phrases.

Command abbreviations

To improve your general efficiency when using *View*, you may like to learn some or all of the abbreviations for the various commands used in the Command mode. These commands and their associated abbreviations are illustrated in table 1.

Unlike abbreviations for disc commands in the BBC micro, there is no need to

follow the shortened version of a *View* command with a full stop. If you should do so, *View* may interpret the punctuation as the character used to separate the command from a filename (this is known as a delimiter) and thus produce error messages to the effect that it does not recognise the name of the file.

Command	Abbreviation		
	VIEW 1.4	VIEW 2.1	VIEW 3*
LOAD	—	L	L
SAVE	—	—	SA
SCREEN	—	—	SC
PRINT	P	P	P
SHEETS	—	—	SH
FORMAT	—	—	FOR
MODE	—	—	M
NEW	—	—	—
OLD	—	—	—
READ	—	—	RE
WRITE	—	—	W
EDIT	—	—	E
MORE	M	M	M
FINISH	F	F	F
QUIT	—	—	—
PRINTER	—	—	PRINTE
MICROSPACE	—	—	MI
COUNT	—	—	CO
CLEAR	—	—	CL
SEARCH	S	S	S
CHANGE	C	C	C
REPLACE	R	R	R
FOLD	N/A	—	FO
WILD	—	—	—
FIELD	—	—	FI
NAME	N/A	N/A	N
SETUP	N/A	N/A	SE

As fitted to the Master Series 128 and Master Compact

Table 1. Valid abbreviations in *View*

Speeding up the cursor

As you become more familiar with *View*, and for that matter any of the other programs in the *View* family, you will probably find the standard speed at which the cursor moves around the screen a little on the slow side. This can be easily rectified using *FX commands:

*FX 11

governs the length of time before a key auto-repeats if it is held down:

*FX 12

controls the amount of time between each auto-repeat. The default settings for these times are 32 and eight-hundredths of a second respectively. It is unwise to reduce them too much or the slightest pressure on

HSV COMPUTER SERVICES LIMITED

ALL OUR PRICES INCLUDE CARRIAGE & VAT - NO EXTRAS TO PAY!

CONTINUOUS STATIONERY

	250	500	1000	2000
9.5" x 11" 60 GSM MICRO-PERF ALL EDGES	£2.95	£4.95	£8.95	£14.95
TRUE A4 90GSM MICRO-PERF ALL EDGES	£5.25	£8.75	£14.95	—
LABELS 3.5" x 1.5" (1 across)	—	£2.95	£4.95	£9.50
LABELS 4.0" x 1.5" (1 across)	—	£3.25	£5.50	£10.50
LABELS 4.0" x 1.5" (2 across)	—	£3.75	£6.50	£11.95
LABELS 2.75" x 1.5" (3 across)	—	£2.75	£4.50	£8.50

PRINTER RIBBONS

	Each		Each
CANON PW1080/1186	3.25	PANASONIC KXP1090,	4.75
EPSON FX/MX/RX80	3.25	SEIKOSHA GP80	2.75
EPSON LX80	3.25	SEIKOSHA GP100	3.75
EPSON MX100	3.25	SHINWA CP80	4.75
JUKI 6100 S/S	1.75	STAR SG10/SG15	1.75
JUKI 6100 M/S	£2.75	TAXAN KAGA	3.25
MANNESMANN TALLY MT80/80+	4.75	WALTERS WM80	4.75
OKI MICROLINE 80/82/83	1.75	WALTERS WM2000/4000	4.75

StorageMaster™

DISKETTES (Boxed in 10's)

3 1/2" SS/DD 135 TPI 80 TRACK	£24.95	5 1/4" SS/DD 48 TPI 40 TRACK	12.95
3 1/2" DS/DD 135 TPI 80 TRACK	32.95	5 1/4" DS/DD 48 TPI 40 TRACK	16.95
		5 1/4" DS/QD 96 TPI 80 TRACK	19.95

UNBRANDED LIFETIME GUARANTEE

	QUANTITY	10	20	30	40	50	100
3 1/2"	SS/DD 135TPI	15.50	30.50	45.50	60.50	75.50	149.50
	DS/DD 135TPI	17.50	34.50	51.50	68.50	85.50	169.50
5 1/4"	SS/DD 48TPI	5.95	11.50	16.95	22.50	27.95	54.95
	DS/DD 48TPI	6.95	13.50	19.95	26.50	32.95	64.95
	DS/QD 96TPI	7.95	15.50	22.95	30.50	37.95	74.95

ALL DISKS SUPPLIED IN CARDBOARD BOXES WITH WRITE PROTECT TABS, LABELS

AND ENVELOPES AND COME WITH OUR NO QUIBBLE MONEY BACK OR REPLACEMENT GUARANTEE.

DISKETTE STORAGE BOXES

Price Each

50 x 5 1/4" HINGED LID	7.95
50 x 5 1/4" HINGED LID LOCKABLE	8.95
70 x 5 1/4" HINGED LID LOCKABLE	10.95
100 x 5 1/4" HINGED LID LOCKABLE	13.95
40 x 3 1/2" HINGED LID LOCKABLE	9.95
30 x 3 1/2" HINGED LID	8.95



CREDIT CARD HOT LINE! (0256) 463507



HSV COMPUTER SERVICES LIMITED, 40 - 42 New Market Square, Basingstoke, Hants RG21 1HS (0256) 463507

Data Preparation

Computer Supplies

HSV

a key will enter lots of characters, or send the cursor whizzing all over the document. They can comfortably be adjusted to 25 and six-hundredths for a much more responsive feel. The new parameters for the FX commands can be entered at any time from the Command screen:

*FX 11,25 Return

*FX 12,6 Return

Once you have speeded up the cursor movement, it is unwise to keep your finger pressed on the keys when doing things like moving up through the text a screenful at a time or deleting lines. The relative speed with which the micro responds to the key presses may cause you to overshoot, and accidentally destroy more text than you intended. If you wish to reset both the delay and auto-repeat times to normal, you should enter:

*FX 12,0 Return

Saving and loading text portions

By enclosing a section of your text in markers it is possible to save and load only the marked section on to disc or cassette using the WRITE command.

Suppose you have a set paragraph that you often use to begin or end a letter. Once it is written on the wordprocessor, you can save it for use time and time again as a sort of building block.

This is done by placing it within two markers (markers one and two are best, as they show up on the screen), and making a new file of the marked section only. Position the cursor at the start of the chosen paragraph, and press the Set Marker function key (Shift-f7). You will be prompted in the top left corner of the screen for the number of the marker to be set. Press '1' and you will see the marker appear as an inverse character. Then move the cursor to the end of the paragraph – the blank line after it is a good place to choose – and set marker two in the same way.

If you now go to the Command screen, you will see that an extra line has appeared at the bottom of the status display which says Marker(s) set 1,2. Now put a disc in the drive to take the marked section, and decide on a filename for it. If the file is to be called PARA1 then to save it onto the disc and enter:

WRITE PARA1 1 2

The numbers at the end specify the markers between which the area to be saved lies. If they are omitted, then *View* will WRITE the whole of the file in memory to the PARA1 file, rather than just the

marked section. So WRITE is roughly the equivalent to the SAVE command, except that it can be used with markers, whereas SAVE cannot. If you are using the disc filing system you may notice that WRITE is considerably slower than SAVE. This is seen even more clearly with the Econet network.

The corresponding equivalent of the LOAD command is READ, which enables you to retrieve files and add them to existing text in memory (unlike LOAD, which erases anything previously held in memory). READ used on its own (eg, READ PARA1) will place the specified file at the end of the text in memory. You may want to put it elsewhere, in which case you can set a marker at the point where you want the contents of the file to be inserted, and quote the marker number at the end of the READ command:

READ PARA1 1

In this way you can assemble new work from often-used passages of text (changing them afterwards if required), or you can re-use complicated tables that you have already created, and generally save a lot of time. The READ command can also be used to incorporate text-only files from other programs (such as *ViewSheet* and *ViewStore*) in the preparation of reports, and from electronic mail.

Using the function keys

In addition to performing the range of operations shown on the function key strip in *View*'s Text mode, the BBC micro's red function keys can be assigned extra duties which can significantly speed up your use of the *View* software.

Each key can be used in two different ways. In Text mode they can be loaded with often used words and phrases, which can save a lot of time when you are typing, and from the Command screen the keys can generate complex or often-used sequences of commands.

The BBC micro can be given new 'definitions' for the contents of each function key using the *KEY operating system command. Running a language like Basic, for example, once a key has been defined it can be used straight away to generate the necessary command or characters stored in it. In the case of the *View* family, an extra command must be given to the micro first, in order to 'free' the contents of the keys. The defining of the keys is all done from the Command screen. You need to enter:

*FX 228,1

Then, to define a function key, you use the

*KEY command, followed by the number of the key in question, and what you want it to do. Say you wanted a function key to hold a long word that you needed to use a lot throughout an article, such as 'staphylococcal'. To load the f0 key with this, you should enter:

*KEY0 "staphylococcal" Return

The double quotes are not absolutely necessary, but they do make it clear to the micro that this is a phrase of text to be dealt with, and not a command. If you then go into text mode, you can make the key print out its contents onto the screen by holding down both the CTRL and Shift keys at once, then pressing f0. You will see the word or phrase appear on the screen as if it had been typed in.

The second way of using the function keys is in the Command mode itself, where they can be used to hold command sequences. Say you want a single keypress to lock all the files on your disc so they can't accidentally be deleted or overwritten. If you are using the disc filing system, this can be done using the command *ACCESS. To make key f1 lock all the files in every directory, enter:

*KEY1 "*ACCESS *.L:M" Return

L:M is a way of making the key enter a Return after issuing the instruction (; is the symbol on the key at the top right of the keyboard). In mode 7, this appears on screen as ||. To make use of this key in the Command mode, there is no need to hold down the CTRL and Shift keys. As long as you have already entered:

*FX228,1

Simply pressing the function key on its own will generate the necessary characters, and the current disc drive will whirr into life, locking all the files on that drive. To unlock all the files, another key could be loaded with:

*KEY2 "*ACCESS *.L:M" Return

which will unlock every file in every directory. Note that the ADFS does not allow you to lock every file in every directory, but you can make key 1 lock all the files in the current directory using:

*KEY1 "*ACCESS *L:M"

and similarly *KEY2 can unlock the files again if you enter:

*KEY2 "*ACCESS *L:M"

Rather than type these function key instructions in each time you use the machine, it would be useful if they could be held in a file to be read in automatically when you begin work. You can edit a *View* file like the one shown below, then make up a text only version (called Keys,

Your Drive and our Technology make a great team

For Only £99.95

CHALLENGER 3

Now you don't have to buy another disc drive to enjoy all the benefits of the superb Opus Challenger plug-in disc system.

For just £99.95 you can now convert any single disc drive into a powerful 3-in-1 Challenger system with all the advantages of a lightning-fast RAM disc and advanced double density disc interface. No matter what make of drive you own, our special upgrade package will boost its capacity and performance.

■ RAM DISC SPEED

For the first time our 256K solid state RAM disc is available for use with any disc drive. Up to 20 times faster than a conventional floppy, it allows you to race through work your current drive labours over. You'll create your own unique twin-drive system in a matter of minutes.

■ DOUBLE DENSITY INTERFACE

The Opus double density disc interface is already a best-seller and it's suitable for use with both 40 and 80 track drives, single or double-sided. It's even compatible with the Master and Master Compact computers. You'll gain an immediate 80% increase in data storage capacity over the standard Acorn DFS and, because our DDOS plugs directly into your micro, there are no complicated interface connections to worry about. You can leave your DFS in place, guaranteeing 100% compatibility.

■ LIMITED OFFER

This remarkable offer gives disc drive owners the unique opportunity to catch-up with the latest in disc system technology for a fraction of the cost. But hurry, our special offer is available for a limited period only.

Of course, if you've yet to choose a disc drive, our complete Challenger system with built-in 5¼" double-sided 40/80 track drive is also available. Choose our 256K RAM version for just £179.95 or 512K RAM option at only £199.95.

Call Opus on 0737 65080 or simply post the coupon below. Our price even includes VAT and FREE guaranteed 72-hour delivery. Generous education and dealer discounts available.

To: Opus Supplies Limited, 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey RH1 2LW
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

- _____ Challenger Upgrade System(s) at £99.95 each
_____ Complete Challenger Disc System(s) – 256K RAM version at £179.95 each
_____ Complete Challenger Disc System(s) – 512K RAM version at £199.95 each

I enclose a cheque for £_____ or please debit my credit card account with the amount of £_____

My Access ☐ Visa ☐ no. is

NAME _____

ADDRESS _____

TELEPHONE _____

AU

Opus.



0737 65080

perhaps) which can be read in at any time by typing:

*EXEC KEYS Return

whereupon the micro will read in the set of definitions just as if they had been typed at the keyboard (see figure 2).

When in a graphics mode, pressing f8 gives white text on a blue background, while f9 gives green text on a black background

Once the text has been entered, you need to create a file which can be read into

```
*KEY 0 "*DRIVE 0:M"
*KEY 1 "*DRIVE 1:M"
*KEY 2 "*DRIVE 2:M"
*KEY 3 "*DRIVE 3:M"
*KEY 4 "*ACCESS *.* L:M"
*KEY 5 "*ACCESS *.* I:M"
*KEY 6 "*CAT:M"
*KEY 7 "COUNT 1 2:M"
*KEY 8 "ISIAIGIEIEMISIEIDIEIEM"
*KEY 9 "ISIAIBIEIEMISIEIEMIEIEM"
```

Figure 2. Function keys defined

the Command screen from disc without any adverse effects. *View* files are not pure text – they contain special characters called control codes – which can upset the micro

if you try to display them on the screen, rather than trying to LOAD the file into *View* first. So you need to make a file of text characters only. This is known as an ASCII file (standing for American Standard Code for Information Interchange), and to generate a text-only file you need to screen the file and make a copy on disc as you do so. First, press Escape to get to the Command screen, then place a suitable disc in the disc drive. Make sure that you have saved a copy of the above *View* file first, in case anything should go wrong. Then enter:

*SPOOL KEYS Return

The disc will rotate, then stop. The micro has opened a file called Keys on the disc, and will now feed anything that appears on the screen straight to it. Now screen the file with the function key definitions, either from disc or from memory. Once this is done, type:

*SPOOL Return

to close the Keys file. Then type NEW and

load the Keys file into *View* using the READ command as follows:

READ KEYS Return

READ is used instead of the normal load command, because it is suitable for bringing text into *View* that is not in the regular *View* file format. If you now press Escape to go into Text mode, you will see that the file has been read in, and you can go through it deleting any unwanted lines using the f7 function key until you are left with the required block of text. Do not make any other alterations at this stage, but use the Save command to re-save Keys in

```
*FX 22B,1
*FX 202,48
*WORD
MODE 3
SETUP F1
NEW
PRINTER JUK14
*KEY 0 "*DRIVE 0:M"
*KEY 1 "*DRIVE 1:M"
*KEY 2 "*DRIVE 2:M"
*KEY 3 "*DRIVE 3:M"
*KEY 4 "*ACCESS *.* L:M"
*KEY 5 "*ACCESS *.* I:M"
*KEY 6 "*CAT:M"
*KEY 7 "COUNT 1 2:M"
*KEY 8 "ISIAIGIEIEMISIEIDIEIEM"
*KEY 9 "ISIAIBIEIEMISIEIEMIEIEM"
```

Figure 3. A complete auto-boot sequence

The screen

In applications where prolonged use of *View* or *ViewSheet* is anticipated, the slightly blurred image obtained on a domestic television can be extremely tiring to watch. A sharp picture is particularly important when using the 80-character per line display, and the solution could be to obtain a high-definition colour monitor. This could handle the fine detail created by the BBC micro, making it equally suited to games, educational and business use. Purely business users will probably select a very sharp monochrome monitor with a green or orange screen. In all, the Master 128 is equipped with three different sorts of outputs for driving visual displays, and is hence capable of feeding a wide variety of televisions and monitors.

Working in colour

You can readily obtain different coloured text using *View* (and the other *View* family software) so if you are using a colour monitor, you may prefer to change the normal display from white text on black to something a little less hard on the eye. Good combinations are green, yellow or pale blue on black, or white on dark blue. If you are using a low resolution colour monitor in an 80 column mode, it is often best to

go for the green text colour, as this is easy to read, and only uses one colour gun in the monitor's tube, so it can often give sharper results as there are no registration problems.

To change the screen colour from within *View* or *ViewSheet*, you need to go into your selected graphics mode, then enter a series of characters in the Command mode – for green text, you should hold down the CTRL key, then press the following key sequence:

S A B @ @ @

The text colour will change to green as soon as you press the last '@' character, and you can then let go of the CTRL key. This is the equivalent of using a VDU 19 command.

The sequences for other useful colours are as follows:

For yellow:

S A C @ @ @

For cyan (pale blue):

S A F @ @ @

and to restore the normal white text:

S A G @ @ @

To keep the foreground white, but change the background colour to dark blue, enter:

S @ D @ @ @

again, keeping the CTRL key pressed the whole time. To restore the black background, use:

S @ @ @ @ @

this final form. You will now be able to load all the key definitions into the micro by entering, *EXEC KEYS Return from the Command screen. Using a similar file, a complete 'auto-boot' sequence could be edited together for the BBC micro as shown in figure 3. This can save a lot of time as it can be used at the start of each session to set the micro up

*FX 202,48

Turns off the Caps Lock, while:

SETUP F1

Sets *View*'s formatting and insert modes on, and justification off.

You can include the instruction to load in a printer driver as well, as long as a copy of the driver is on the same disc. The above file should be prepared as a text only file using the method described above, and finally saved under the name \$!.BOOT. All that is needed then is to set an auto-start option on the disc by entering:

*OPT 4,3 Return

This will enable the BBC micro to read in the contents of any file on drive 0 called !BOOT, as if they had been typed in directly at the keyboard. To 'boot the system' in this way, you simply press the Shift and Break keys simultaneously and then, release the Break key first.

Clive Williamson is the author of *Mastering View, ViewSheet and ViewStore*, published by Sigma Press, November 1986, £12.95.

£40.00 Cash Allowance for your old ROM Expansion Board when you trade in for the Fourmeg 256K

or £10.00 reduction if you already have Solidisk DFS

The memory limit on the BBC Micro can now definitely be a thing of the past. The new Solidisk Fourmeg 256 board offers all you could wish for.

It has 256K of extra RAM, a superfast 4MHz CMOS processor, sophisticated memory management, sockets for high capacity ROMs and 48K of software in ROM.

In fact, it contains even more devices than the BBC itself. It is compatible with most hardware add-ons — except Sideways ROM expansion, which explains why this special offer.

Fitting it is easy. You remove the existing processor from its socket and plug the new board in its place, push on three colour-coded wires, clip on two mini-hooks and it's ready. Switch on the computer and you will immediately see the difference.

The message "Solidisk 256K expansion (4MHz)" announces the new memory size and speed.

A switch at the back lets you select between the old (2MHz) and the new (4MHz) speed.

The BBC Micro at 4MHz easily surpasses the new MASTER 128K on benchmarks.

For example, it runs the benchmark using Basic 4 in only half the time taken on the MASTER 128K.

If you have too many ROMs to plug in at once, the Fourmeg 256 offers TWO ways out. First, it includes additional high capacity (and fast) ROM sockets. Moreover, two or four normal ROM images can be stored in one high capacity ROM chip (by "Vertical Paging") — so more can be made immediately available at your fingertips.

Secondly, ROM images can be stored on discs and loaded into any one of the eight Sideways RAM banks available. If you need more room in "languages" such as VIEW or BASIC, you may use any of the eight SHADOW RAM banks. No user memory is then lost to the screen, whatever the screen mode (while machine coded programs can access RAM right up to &FC00!).

Two frequent uses of the extra memory are as a RAMDISK or a printer buffer.

Star commands in the ROM can turn the extra RAM into a silicon DISK of 200K, compatible with both the Solidisk DFS and ADFS formats. The RAMDISK is at least 10 times faster than physical disc drives as it has no moving parts.

The printer buffer saves you time, it lets you use the computer while feeding your printer in the background. In addition, the MANAGER ROM offers over 30 star command utilities to save time and effort using the computer.

To complement such a powerful product, Solidisk has arranged with Computer Concepts to bundle the famous WORDWISE PLUS wordprocessor ROM and manuals. This excellent product, worth £45.00 on its own, became the best selling wordprocessor for the BBC computer last year. All in all, the Solidisk Fourmeg 256 offers an unmatched combination of speed, power and built-in facilities, while still having room for even further expansion. It is the most logical next step for the owners of any Sideways ROM board or of Solidisk Sideways RAM, who can trade in their present boards for the excellent Fourmeg 256.

Yes! I want to take you up on your special offer

"I will pay only: (delete if not applicable)



£135.00 instead of the normal price (175), I will send you my old ROM board when I have been satisfied with your Fourmeg 256.



£165.00 instead of the normal price, I already have your DFS installed in my BBC.



I also allow £3.00 for First Class Post.

If for any reason I am not entirely satisfied with your product, I will return it before 15 days and have all my money back (except postage if applicable)".


Name

Address

Access/Visa Account :

Send to:
Solidisk Technology Ltd
17 Swayne Avenue, Southend-on-Sea
Essex SS2 6JQ

We reserve the right to change prices and specifications without notice for improvement.

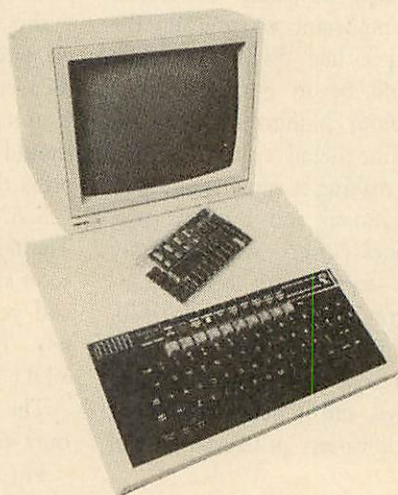

SOLIDISK has products to expand your BBC Micro inside out, so why hesitate, pick up the phone and ring this number:

SOUTHEND
(0702) 354 674

ASK FOR A BROCHURE

Shadow, Sideways ROM and Sideways RAM All-In-One for £50:

This board, the TWOMEG-32K, is specifically designed with the SCHOOL BEEB in mind so that one could have everything one wanted on a single, compact and extremely easy to install unit. All the necessary software is in a MANAGER ROM (supplied).

The top row of FIVE ROM sockets will take software ROMs, up to 32K each such as used on the BBC Plus and MASTER 128.

The middle row contains 32K of additional CMOS, low power RAM, acting as SHADOW RAM or as two banks of SIDEWAYS RAM.

The empty 40 pin socket will receive either the normal 2MHz CPU or the optional enhanced, faster 4MHz CMOS 65C02 (the board will be then called the FOURMEG-32K).


The TWOMEG-32K combined the usual functions of a Sideways ROM board — offering storage for up to 160K on board and 64K on the Beeb itself (a total 224K out of 256K possible) and a SHADOW RAM compatible with major 'language ROMs' such as BASIC, VIEW, WORDWISE, INTERWORD, VIEW-SHEET, VIEW-STORE etc.

When Shadow RAM is in use, a small 8K of Sideways RAM is available for loading ROM images or a small printer buffer. When SHADOW RAM is not in use, the entire 32K additional RAM can be used as TWO banks of SIDEWAYS RAM or as a RAM DISC (available only with Solidisk DFS or ADFS).

The MANAGER ROM also contains a powerful TOOLKIT to assist PROGRAMMING IN BASIC.

The attraction of the TWOMEG-32K board comes from its versatility, its convenient software in ROM and its low price tag. Furthermore, the board can be fitted with a CMOS 65C02 capable for example of running the new BASIC 4 (some 30% faster than BASIC 2 and also more accurate) or upgraded to FOURMEG speed, comparable to the TURBO board on the MASTER.

TWOMEG-32K	£50.00
65C02 (2MHz) for the above	£10.00
Or upgrade to FOURMEG	£25.00
FOURMEG-32K	£70.00

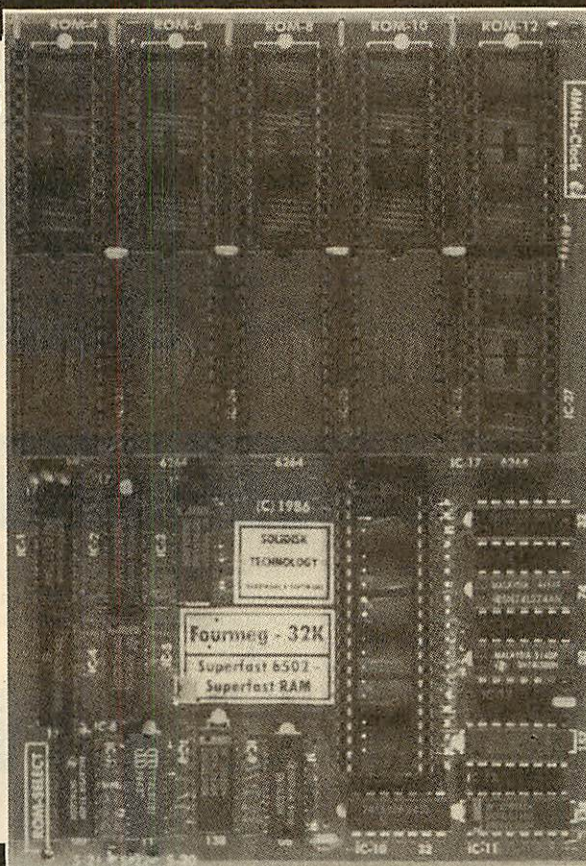

Real Time Clock & Desk:

The Real Time Clock and Calendar (RTC) can be plugged into any ROM socket on the BBC Model B with absolutely no other connection to make.

The Real Time Clock is powered by a rechargeable battery which should keep the RTC active throughout the Summer Holidays.


Apart from giving the Time and Date, through *TIME or TIMES (BASIC 4), the RTC has many of the AUTO-CONFIGURE features of the MASTER 128K with the same command syntax, a friendly DESKTOP program for use with the AMX MOUSE, a DIARY and a Calculator.

Many additional commands are background commands, leaving your computer free to run your program. They set the time, display the clock in any screen mode, bleep at specified time, interrupt and show a message when you have an appointment, perform a specified task at specified time etc.

You can even 'Clock Boot' your computer directly into the DESKTOP, using the MOUSE you can operate the computer without touching the keyboard (ATARI-ST style) until you 'click' on a language ROM or an application program. You can pop down the pocket size calculator, change the time and edit your DIARY (instead of using a word processor).

The Real Time Clock will add fun and convenience to the every day use of your BEEB.

Order as CLOCK	£29.00
----------------------	--------

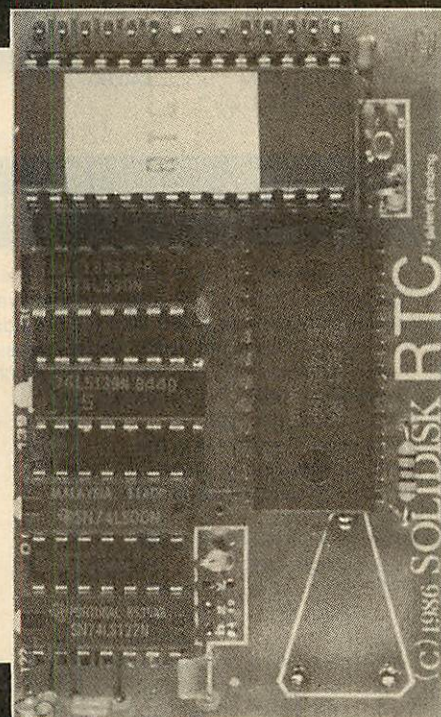


In Brief:

The range of Solidisk Add-Ons for the Beeb is quite extensive. For example: TWOMEG-32K ... £50.00, FOURMEG-32K ... £70.00, SWR64 with S/W pack 1 ... £60.00, SWR128 (new style) with S/W pack 1 ... £80.00, FOURMEG-256K with WORDWISE PLUS ... £175.00, DDFS (1770) ... £35.00, DFDC (1770+8271) ... £40.00, DFS 2.2 ROM ... £15.00, ADFS 2.1 ROM set ... £30.00, 3 1/2 inch (80 track double sided) drive ... £90.00, 5 1/4 inch drive ... £109.00, 20MB Winchester with PSU ... £745, Linemaster communication ROM ... £10.00, Insight intelligent disassembler ROM ... £15.00, Solimon machine code monitor ROM ... £10.00, Toolkit ROM ... £10.00, S/W pack (1 to 3) of 5 discs ... £10.00, 2764 EPROM ... £1.00 each, 27128 ... £3.00, 27256 ... £6.00, EPROM programmer for 2764/27128 ... £19.00, EPROM programmer for 27256 ... £21.00, EPROM Eraser ... £20.00.

Double density disc interface


Solidisk very popular Double Density Disc Filing System (DDFS) is based on the WD-1770 floppy disc controller, the same chip used on the Beeb-Plus and the Master series, totally hardware compatible with Acorn 1770 DFS and ADFS ROMs. The DDFS is suitable for virtually any type of floppy disc drives, 3½" and 5¼", 40 track and 80 track, single and double-sided with or without power supply unit. New low price without DFS ROM

..... £35.00
(order as XR/DDFS)




1770+8271, dual floppy disc controller interface

Solidisk DFDC (1770+8271) is the best seller in disc upgrades for Model B's already fitted with an INTEL 8271 chip (Acorn, Watford, Pace, Viglen, Cumana etc). It plugs into the 8271 socket with the latter relocated on the DFDC itself. This is the most convenient way of adding the modern and powerful 1770 without sacrificing the 8271 chip. The DFDC is fully hardware compatible with both Acorn DNFS 1.2 and ADFS ROMs, as well as Solidisk DFS 2.2 and ADFS 2.1 ROMs. The Acorn DNFS 1.2 is recommended for use jointly with the Solidisk ADFS 2.1 as both systems 'self-frugalise' to keep PAGE at the lowest value. We recommend the DFS 2.2 ROM alone if ADFS is not required. New low price without DFS ROM £40.00 (order as XR/DFDC)



Low cost 3 ½ inch disc drives

The new generation of THIRD HEIGHT 3 and a half inch Floppy Disc Drives offers unprecedented value for money. They feature Double-sided, 80 track per side mechanism offering up to 640K per disc in double density and ADFS. Low power, large capacity, extremely quiet mechanism, robust media and LOWER PRICE than 5 and ¼ drives make them irresistible. They are also the newly adopted Acorn disc standard. Cased, all leads. One year guarantee.
Order as 3.5 INCH-DRIVE (80 track/Double-sided) £90.00
FREE demonstration diskette (double sided) in DFS format while stock lasts (containing a Database, a Word-processor and a selection of games and disc utilities). Separate power supply for BBC Model B, issue 2 or Electron is available at £25.00. Order as 3.5/PSU.

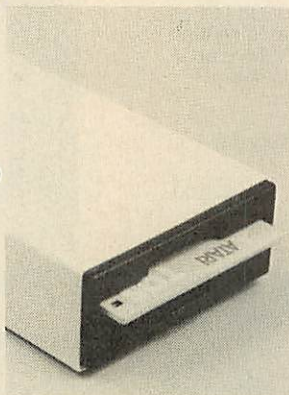

Special leads

A Special set of leads to connect TWO drives in ANY combination of 5¼ and 3½ drives is available separately at only £15.00 or only £8.00 surcharge if supplied in lieu of standard leads. Order as SPECIAL LEADS.


Advanced disc filing system ROM-set (two 16k EPROMs) version 2.1

The finest product yet for any BBC computer fitted with the 1770 Floppy Disc Controller (Model B, Plus and Master 128K and Electron) encompassing many Master 128K specifications. The list of features is so extensive that it would require a lot more space to describe it. In brief, it has ALL the features of the 2.2 DFS ROM except device drivers for the INTEL-8271 chip, full ADFS implementation comparable to the MASTER 128K. Plus ADFS-FORMAT (FORM40, FORM80 and FORM160) and VERIFY. Plus MVDIFS and MVADIFS to transfer files between DFS and ADFS formats with automatic PAUSE for disc change rendering possible to operate with a single drive. Low PAGE value. Compatible with 6502, Z80, 32016, 80186 (Master version) Second Processor. Two manuals.
Normally £30.00 but if order with DDFS or DFDC only £20.00
Please mention computer model when ordering. Order as ROMS2.1S. Also available on a single 32K EPROM as ROM2.1/32.



Single and double density disc filing system ROM version 2.2

The most powerful and versatile DFS ROM available for the BBC model B, the BBC Plus and the Master 128K. Suitable for both 8271 and 1770 Floppy Disc Controller. Double density allows up to 60% increase over conventional format or 640K storage per (80 track double-sided) disc. Extensive features include 40 and 80 track software switch, unlimited filenames in catalogue (as opposed to Acorn 31), automatic Read after Write. It works with Z80, 6502 second processors and Econet and also is very fast on comparative review benchmarks. Built-in commands include FORMAT (F40 and F80), VERIFY, DZAP, MZAP, RECOVER, RESTORE, WORD, RTRACK, WTRACK etc... Also, ENABLE M allows IBM PC discs to be read or written to. Extensive User Manual covers many technical details. Supplied on 16K EPROM.
Normally £15.00 but if order with DDFS or DFDC only £10.00
Please mention computer model when ordering. Order as ROM2.2.



Unbeatable quality 5 and ¼ inch disc drives

Also available are NEC or MITSUBISHI 5 and ¼ inch, 80 track, double-sided drives at a very attractive price. Cased in matching cream colour, all leads. Only £109.00




Free bridge unit for twin drive systems

If you pay for two drives on a single order, we will offer you, absolutely FREE this practical BRIDGE unit. Solid steel construction, suitable for all Models of BBC and Master 128K.

Electron Disc Interface:

This unit (EFS) plugs into the PLUS-1 Expansion and allows connection of a twin disc drive system and a Winchester. The Disc Interface is based on the same WD1770 chip as used on the Beeb. The Electron Disc Filing System software in ROM (32K) is a version of the Solidisk ADFS 2.1 thus offers a large degree of compatibility with Beeb software. The system is capable of both Beeb DFS format (single and double density) and ADFS format as used on the Acorn PLUS-3. The unit also has a 16K of Sideways RAM which can be used to load ROM images. The unit is guaranteed for one full year but we warn the users that the built-in Sideways RAM is UNRELIABLE hence the reduced price of only:

.....£50.00.
Use a disc system with built-in power supply unit.

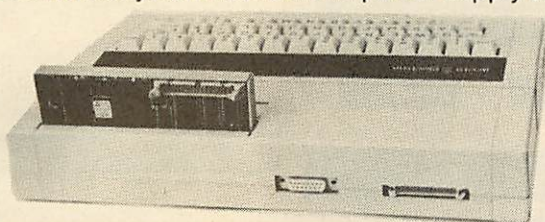

Old Style SWR32 and 128K:


This exceedingly popular system (30,000 plus units sold) enables the Beeb user to load one or two ROM images into the Beeb, make a 16K printer buffer, use DFS with PAGE at &E00, play games, run bigger BASIC, store music and innumerable other uses as supported by a library of 15 software diskettes. The SWR32 system consists of a BASE UNIT which plugs into the rightmost ROM socket on the BBC board and a (exchangeable) RAM CARD. The RAM CARD also has extension socket for a piggy-back memory board capable of bringing the extra memory to 128K bytes of RAM.

This system is now superseded by the new FOURMEG series and therefore offered at a knock-down price of ONLY £20.00 for a complete unit, excluding software. The 96k add-on piggy-back memory board is also greatly reduced.

Order as SWR32£20.00
Order as SWR128 (SWR32 with 96K extension) .£50.00
NB: Manual supplied but software (not strictly required) not included.

The supportive software is a series of 15 diskettes, available on either 40 or 80 track DFS diskettes. You can buy any number of VOLUMES although we recommend you buy by PACK of FIVE volumes. PACK 1 (volumes 1 to 5) contains general applications such as MENU, PRINTER, DFS0E00, SILEXICON etc. PACK 2 contains programming applications (SOLIMON, SOLITRACE, TELETXT EDITOR, SPRITES, DFS and ADFS etc). PACK 3 contains exclusively computer games. Each diskette is priced at only £2.00, software PACK is £10.00 for 5 diskettes.

Order as VOL. XX£2.00
Order as SOFT/PACK 1 or 2 or 3£10.00

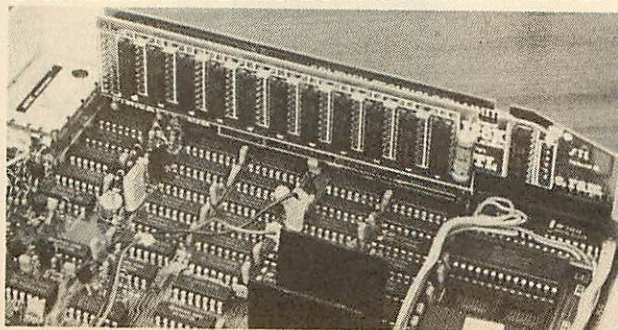

Secondhand Refurbished Beebs:

As a result of the Solidisk MASTERPLAN, we have to dispose regularly of SECONDHAND, refurbished, complete with Double Density DISC INTERFACE, thoroughly checked and fully guaranteed (Labour only) BBC Model B's. Price vary with issues and ages, commencing from £150.00. Please ring for brochure.



In Brief:

The range of Solidisk Add-Ons for the Beeb is quite extensive. For example: TWOMEG-32K ... £50.00, FOURMEG-32K ... £70.00, SWR64 with S/W pack 1 ... £60.00, SWR128 (new style) with S/W pack 1 ... £80.00, FOURMEG-256K with WORDWISE PLUS ... £175.00, DDFS (1770) ... £35.00, DFDC (1770+8271) ... £40.00, DFS 2.2 ROM ... £15.00, ADFS 2.1 ROM set ... £30.00, 3 1/2 inch (80 track double sided) drive ... £90.00, 5 1/4 inch drive ... £109.00, 20MB Winchester with PSU ... £745.00, Linemaster communication ROM ... £10.00, Insight intelligent disassembler ROM ... £15.00, Solimon machine code monitor ROM ... £10.00, Toolkit ROM ... £10.00, S/W pack (1 to 3) of 5 discs ... £10.00, 2764 EPROM ... £1.00 each, 27128 ... £3.00, 27256 ... £6.00, EPROM programmer for 2764/27128 ... £19.00, EPROM programmer for 27256 ... £21.00, EPROM Eraser ... £20.00.

Order Form


ITEM	PRICE
1)	
2)	
3)	
ADD post and packing£2.00 (£3.00 for disc drive)	
TOTAL:	
Name	
Address	
Access/Visa Account	
Send to: Solidisk Technology Ltd 17 Swayne Avenue, Southend-on-Sea Essex SS2 6JQ	
We reserve the right to change prices and specifications without notice for improvement	

SOLIDISK AUTUMN SALE

System One: COMPACT

A Master COMPACT 128K, two 80-track, double-sided (1.3 MB) 3.5 inch disc drives (a must even for copying ADFS file to another disc), a choice of Mono or Colour monitor, free Solidisk Double Density DFS Master Version ROM to run thousands of BBC programs, free DATABASE and SPELLING CHECKER disc.

As illustrated with Acorn Mono monitor£598.00
With Acorn Colour monitor£749.00
MP165 printer if bought together£220.00

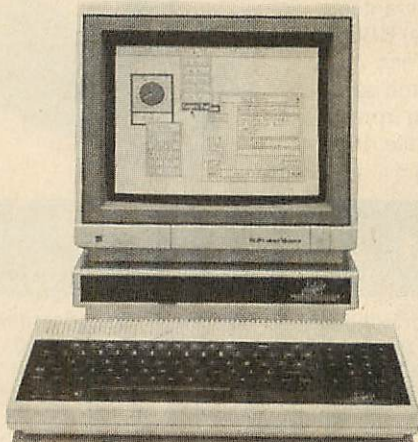

System Three: MASTER 512K with 80186

A MASTER 128K internally upgraded with the 512K-80186 co-processor, twin 1.3 Megabyte disc drives, 20 MB Solidisk Hard Disc and special ADFS/Double Density DFS ROM, GEM and MASTER software packages.

As illustrated (without monitor)£1600
With MP165 NLQ printer£1800
With Juki 6100 Daisy Wheel printer£1880




Pick any of these Four, and you are sure to get every penny's worth. You'll get more than just the lowest ever prices: a flexible trade-in scheme, free telephone support and free software are in the packs."

System Two: MASTER

A fully blown MASTER 128K, twin 80-track, double-sided 1.3 Megabyte Disc Drives in a bridge unit doubling as a monitor stand, free MEGAGAMES, DATABASE and SPELLING CHECKER in 5 discs.


As illustrated (without monitor)£660.00
With MP 165 printer, 165 cps, NLQ, EPSON compatible (even the ribbon)£880.00

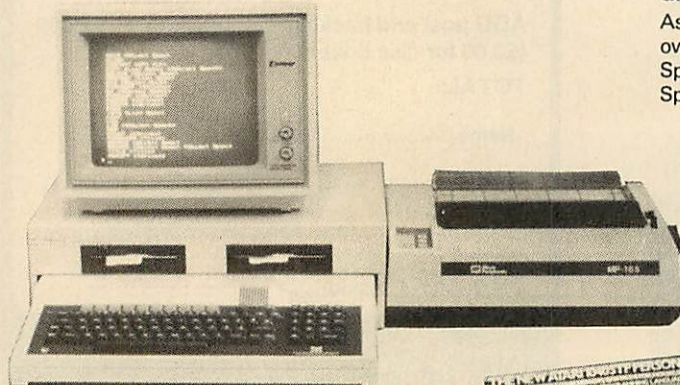

System Four: 520 STM

ATARI slogan is 'Power without the Price'. This is specially true with this 520-STM computer, 16 bit 8MHz-68000 CPU and 512K of RAM, hard disc connector, RS232, Midi interface, printer port and Mouse. The bundled software includes GEM (as on the MASTER 512), word-processor, Basic, Logo and CPM emulator. More information is available on request. Two 80 track, double sided 3.5 inch drives (1.5 Megabytes) complete this system.

As illustrated (without monitor), you use your own TV set£540.00
Special price for MP165 NLQ printer and lead£240.00
Special low price on 20 MB ATARI ST Hard DiscPOA

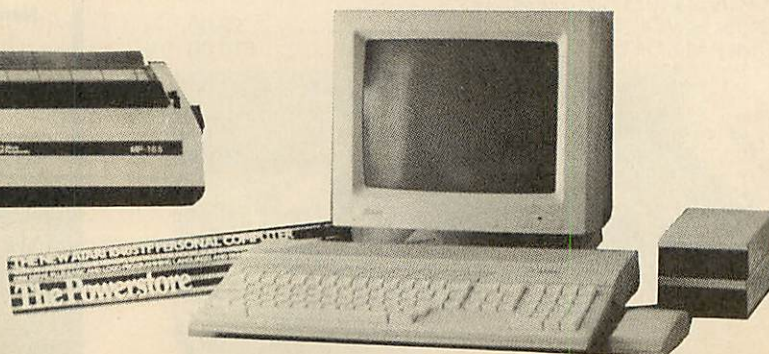

Printers

Code	Description	Price
P101	EPSON LX80 + 2 M printer lead	220.00
P101TF	LX80 Tractor Feed	21.30
P101SF	LX80 Cut Sheet Feeder	53.53
P102	EPSON FX85 NLQ + 2M printer lead	350.00
P102TF	FX85 Tractor Feed	30.59
P102SF	FX85 Cut Sheet Feeder	123.50
P103	MP165 — 165 cps + NLQ + 2M printer lead star buy*	260.00
P103R	Black ribbon for LX80, FX85 and MP165	4.60
P104	JUKI 6100 Daisy Wheel + 2 M printerlead star buy*	340.00
P104R	JUKI 6100 black vinyl printer ribbon	2.30
P105	Panasonic KX-P1080 + 2 M printer lead	165.00
P106	Kaga KP 810 + 2 M printer lead	240.00
P100P	2000 sheets cont. paper, A4 size 11"x9.5"	14.00

Monitors

Code	Description	Price
M101	12" Phillips BM7502 hi-res green screen, BNC lead	85.00
M102	12" Phillips BM7522 amber, BNC lead star buy*	86.00
M103	12" TAXAN Supervision 3, hi-res RGB RGB lead	375.00
M104	12" TAXAN Supervision 2, hi-res RGB RGB lead	315.00
M105	14" Mitsubishi XC1404, RGB lead star buy*	260.00

Diskettes

Code	Description	Price
C100	5 1/4" low cost VEREX for all drives	12.00
C101	5 1/4" hi-rel MD557, Verbatim DSDD 96 tpi	25.00
C102	3.5" low cost Verbatim for all drives	20.00
C103	3.5" hi-rel 90097M Verbatim DSDD 135 tpi	28.00
C104	3" CF2/MOFT for all Amstrad drives	39.00

Acorn Co-processors

Code	Description	Price
C110	Master Turbo	113.00
C111	Master 512K-80186 and software bundle	375.00
C112	32016, 6MHz, 8MHz and 10MHz	POA
C112A	Solidisk ADFS ROM for 6MHz-32016	20.00
C120	M128K Econet Module	46.50

Order form

All prices are inclusive of VAT at 15% but excluding delivery. We reserve the right to change without notice.

: System Price

Add delivery £10.00 per system

TOTAL

Name:

Address:

Visa/Access

Send to:
Solidisk, 17 Swayne Ave, Southend-on-Sea,
Essex SS2 6JQ

**"If you have a good
working BBC Model B
already expanded with
Solidisk DFS, or Disc
Drives or Sideways
RAMs, then this
"MASTER PLAN" is
designed for you"**

The Solidisk MASTERPLAN is specifically set up to reduce financial burdens to all Solidisk loyal customers, as much as possible.

Fill in carefully the coupon below and send it to us. We will immediately send you a personalized quotation for upgrading your BBC B to the Master which we are sure you will find really hard to refuse . . .

MASTERPLAN COUPON

Please tell us about your BBC Computer:

1) Issue and Age

2) Upgrades fitted inside:

a)dateby

b)dateby

c)dateby

d)dateby

3) Service history:

a) has never gone wrong (tick box) : :

b) Serviced as follows:


.....

.....

.....

Please fill in your name and address using the order form printed opposite. Send the complete Order Form — Masterplan Reply coupon to Solidisk. Allow 3 working days for your quotation.

Come and See Us

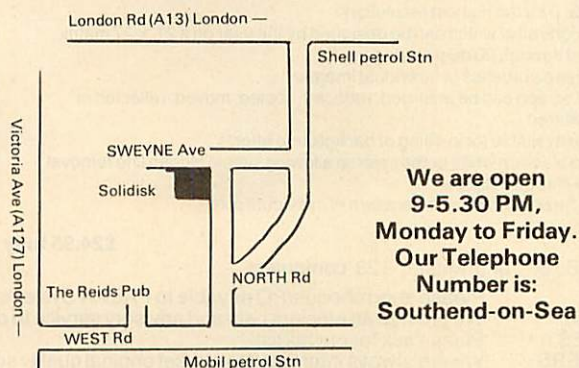

We are open
9-5.30 PM,
Monday to Friday.
Our Telephone
Number is:
Southend-on-Sea

SOUTHEND
(0702) 354 674

SQUIRREL SOFT

PRESENT

The new 'CARE' range of programs:

The Master, Master Compact, BBC-B & B+, and Electron.



INVESTMENT CARE - £13.95

Keeps track of all UNIT TRUSTS, SHARES etc. Produces displays & printouts of Capital Gains, Dividends, Current Holdings valuations showing Quantities, Bid/Offer prices, Values, Gains/Losses, APR., HiVal %, etc.



CASH CARE - £11.95

Bank account AND Savings account. Full Analysis - 60 categories. Budget Forecasts. 3-D Bar Charts. Password Protection. Easy storage of data. Printouts of all accounts and Bar Charts.



BUILDING SOCIETY CARE - £9.95

Checks the complex interest calculations involved on a day to day basis. Shows interest earned to date. Spreadsheet display. Easy storage of data. Printout of account to date.



VAT CARE - £14.95

240 Sales AND 240 Purchases each month (BBC). Three month period. ALERT warning if VAT 2% or more incorrect. Easy storage of data. Printout with month & 3 monthly totals.

PLUS our range of QUALITY games:
Supergolf - £7.50 Trafalgar - £8.00
Popar Perils - £7.95 Bunfun - £6.50

The Squirrel CARES Disk - £24.95 - comprising all four Cares utilities.

The Squirrel GAMES Disk - £14.95 - comprising all four Games programs.

Both compilation disks are priced at less than 50% of the total cost of the individual programs.

*All programs are very easy to use & come with clear, step by step instructions. BBC programs available on disk - specify computer and disk type - No extra charge.

SQUIRREL SOFT

Dept AU, 4 Bindloss Avenue, Eccles, Manchester M30 0DU

Please phone 061-789 4120 for further information
Cheques, P.O.s Same day despatch.

WE ALSO SPECIALISE IN



DOUBLE SIDED/DOUBLE DENSITY
100% ERROR FREE 5 1/4" DISKS

£23 per box of 10

including:
A PERSPEX LIBRARY CASE
VAT and P & P

WE ALSO SUPPLY

Ribbons for all makes of printers
& Computer Listing Paper


TRADE ENQUIRIES WELCOME

BUROCARE LIMITED

211 Kenton Road Harrow Middlesex HA3 0HD

Telephone: 01-907 3636

Computer Systems, Hardware, Software, Maintenance, Repairs, Supplies, Consultancy, Training.

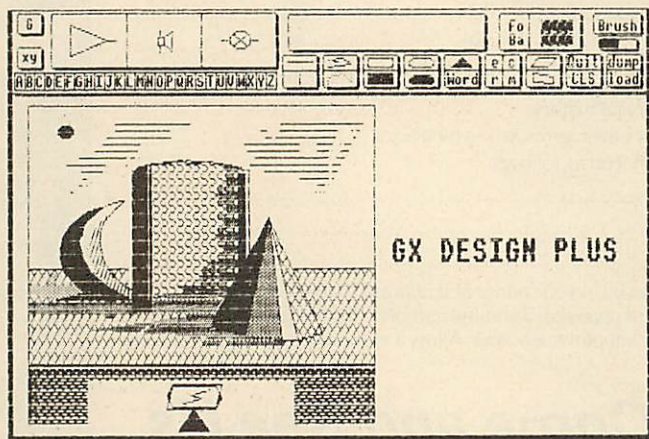

GX DESIGN PLUS

GX DESIGN PLUS

An all-purpose draughting system

The software is driven by an analogue joystick, a tracker ball or from the keyboard and offers a competitively priced entry to a high resolution design application. Its simplicity of use belies the complexity of designs which be drawn with the package and it is also ideal for line plans and layouts.

- * Written in Mode 0 for the highest resolution
- * Access to 78 icons all of which can be designed by the user on a 27 x 27 matrix and re-oriented through 90 degree stages
- * Icons can be use as brushes or individual images
- * Any part of the screen can be enlarged, reduced, copied, moved, reflected or isometrically altered
- * 64 patterns are available for in-filling or background effects
- * Printing can be black on white or the inverse allowing simple hidden line removal for solid or see-through objects
- * Definition can be enhanced by the erasure of individual pixels

- * 2D images can be transformed to 3D using the isometric functions
- * 7 selectable screen display colours
- * Mode 0 text can be expanded to any size
- * Accurate measurement is achieved through the combination of the x & y coordinates and a grid overlay definable up to 40 x 40
- * A built in Epson compatible screen dump allows any parts of or any number of screens to be successively printed out without breaks if desired or alternatively a user's own specific printer dump routine can be used
- * Screens may be saved and loaded and re-edited

£24.95 fully inclusive

For the BBC B, B+ and Master 128 computers

TO ORDER
AFTER SALES
OTHER TITLES
PROGRAMMERS

Please send cheque/PO payable to PAEAN Systems. Specify 40 or 80 despatched by return of post at 1st Class rates. We provide an efficient help and advisory service to our customers.

Please ask for our full list.


We are always interested to market original quality software for the BBC model B, B+, Master 128 and 512 on specialist subjects. We pay up to 20% Royalty.



PAEAN systems

PAEAN SYSTEMS
Little Bealings, Woodbridge
Suffolk IP13 6LT
Tel: (0473) 623757

EXPLORE THE EXCITING WORLD OF COMPUTER GRAPHICS WITH THE UNIQUE LOW COST

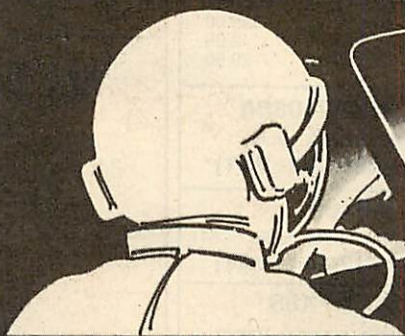

GRAFPAD 2

The Ultimate in graphic input devices for the BBC microcomputer

New Style. New Technology. New Software.

A New powerful Art package for the BBC B and BBC Master Micros. The unique GRAFPAD 2 Digitiser Tablet and New System 1 Rom Art Software combine to give Colour Graphics a new meaning.




All the facilities you require for the most complex and exciting graphics. Fast, Easy to Use, all commands selected directly from the Tablet, even Text and Numerics! Just point the Pen and click the switch. No need to touch your Keyboard. Draw and Paint in numerous colour and pattern combinations. Copy, Invert, Mirror and Flip any part of your picture.

Define your own Symbols and Colour Patterns. Built in Print Routines

GRAFPAD 2 and SYSTEM 1 ROM and Disc Software.

£75.50

INC. VAT

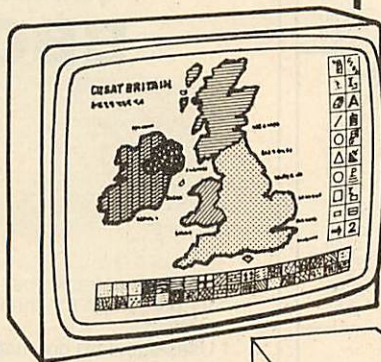


Applications include:

- Option Selection ● C.A.D.
- Form Input ● PCB Design
- Data Collection ● Education
- Picture Creation ● Picture retrieval ● Games
- Construction Design
- Logic Design



Available from most
Computer Dealers or
direct from Grafsales Ltd.

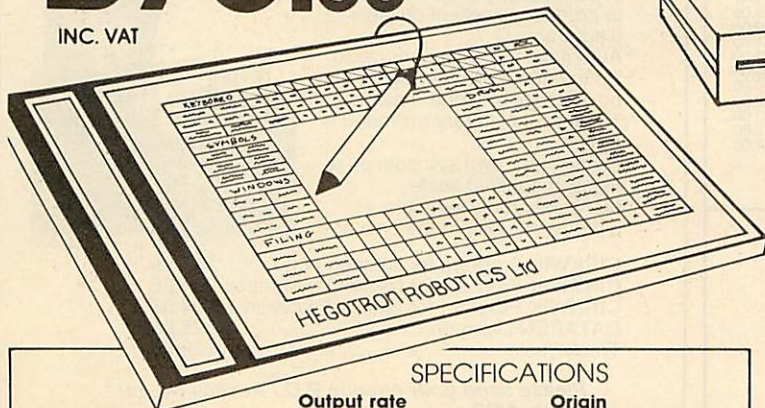

SPECIFICATIONS

Resolution
1280 × 1024 pixels
Repeatability
1 pixel

Output rate
2000 co-ordinate
pairs per second
Interface
Parallel

Origin
Left-hand corner
or selectable
Dimensions
350 × 260 × 12mm

TO: GRAFSALES LIMITED
Unit G2, Penfold Works, Imperial Way, Watford, Herts. WD2 4YY.
Telephone: (0923) 43942 Telex: 946024

AU12

Please supply me with _____ GRAFPAD 2(s) for my BBC B/MASTER*
at £75.50 plus £2.50 p&p, or plus £10 for Datapost.
(Please allow 28 days for delivery).

*Tick whichever is applicable

NAME: _____


ADDRESS: _____

I enclose cheque value £ _____

If you prefer to pay by Access or Barclaycard, please state which...
BARCLAYCARD/ACCESS Card No. _____

TAXAN

with BBC cable & paper
£239.00 (£207.83 + VAT)



KAGA
KP810

	Exc VAT	Inc VAT
KP910 17" width printer	346.96	399.00
KP810 Paper roll	3.43	3.95
Fontaid (NLQ Designer)	26.00	29.90

PANASONIC KX-1080

with BBC cable & paper
£159.00 (£138.26 + VAT)

CANON PW1080A

with BBC cable & paper
£239.00 (£207.83 + VAT)

CITIZEN 120D

with BBC cable & paper
£175.00 (£152.17 + VAT)

MP165

with BBC cable & paper
£199.00 (£173.04 + VAT)

JUKI 6100

with BBC cable & paper
£259.00 (£225.22 + VAT)

EPSON FX85

with BBC cable, paper & Tractor
£359.00 (£312.17 + VAT)

EPSON LX86

with BBC cable & paper
£236.00 (£206.00 + VAT)

STAR NL10

with BBC cable & paper
£236.90 (£206.00 + VAT)

PRINTER ADDONS

	Exc VAT	Inc VAT
LX Tractor Unit	18.22	20.95
LX Sheet Feeder	47.83	55.00
LX Dust Cover	4.00	4.60
LX View Printer Driver	8.65	9.95
Control/Dump Rom	13.00	14.95
KP Dust Cover	4.00	4.60
KP View Printer Driver	8.65	9.95
KP Control/Dump Rom	13.00	14.95

PRINTERS/CABLES

	Exc VAT	Inc VAT
Star NB15	760.00	874.00
Epson LQ800	490.00	563.50
Epson FX100	425.22	489.00
Juki 2200	233.91	269.00
Centronics GLP2	138.26	159.00
1.2m (4foot) BBC cable	6.00	6.90
2.0m (6foot) BBC cable	7.78	8.95
Compact cable (printer)	8.65	9.95

DISC DRIVES

New UFD CSX400A
400K/640K 40/80T disc drive
from Akhter
£99.00 inc VAT
Drive & Acorn DFS £147.00 inc
VAT
(Both above Special Offers finish
on 24/12/86.)

SPECIAL OFFERS

	Exc VAT	Inc VAT
Cumana CSX100 100	84.35	97.00
Cumana CSX400S 400k	120.00	138.00
single No PSU 40/80	137.39	158.00
Cumana CS400S 400k single + PSU 40/80	253.04	291.00
Cumana CD800S 800k dual + PSU 40/80	94.78	109.00
Akhter MD400A Single 400k No PSU 40/80	216.52	249.00
Akhter MD802E Dual 800k + PSU 40/80	289.00	
Akhter MD802D Dual 800k - Plinth + PSU 40/80	251.30	

DISKETTES (lifetime warranty)

	Exc VAT	Inc VAT
10 96tpi D/S D/D in library case	13.90	15.99
10 Low cost 96tpi D/S D/D in library case	7.39	8.50
10 Low cost 96tpi D/S D/D Bulk packed	6.52	7.50

EPROMS, 8271

(Hitachi)

	Exc VAT	Inc VAT
1-9 27128 250nS	2.57	2.95
10 + 27128 250nS	2.30	2.65
1-9 2764 250nS	2.26	2.60
10 + 2764 250nS	2.00	2.30
1-9 27256 250nS	4.57	5.25
10 + 27256 250nS	4.13	4.75
1-9 TTL/CMOS set	4.77	5.49
1-9 8271 controller	32.17	37.00
10 + 8271 controller	30.43	35.00

ROMS/UPGRADES

	Exc VAT	Inc VAT
Inter-Word	38.26	44.00
Inter-Sheet	38.26	44.00
Inter-Chart	25.00	28.75
Wordwise Plus	38.26	44.00
View 2.1	36.52	42.00
View 3.0	55.65	64.00
ViewStore	36.52	42.00
ViewSpell	30.39	34.95
ViewPlot (disc)	22.61	26.00
Acorn 1770 DFS	42.61	49.00
Acorn 8271 DFS	41.74	48.00
1-9 6264LP 150nS	2.55	2.95
B Plus 64K to 128K	26.00	29.90
10 + 6264LP 150nS	2.30	2.65

MASTER/COMPACT

	Exc VAT	Inc VAT
Master 128K Micro	395.00	454.25
Master ET 128K Micro	338.00	388.70
512 Co-processor	334.78	385.00
Turbo Upgrade	103.48	119.00
Cartridges	14.95	14.95
Reference Manuals	14.95	14.95
View 3 User Guide	10.00	10.00
View Sheet User Guide	10.00	10.00
Master & B Dust Covers	3.00	3.45
Second user BBC B's bought & prices sold		

MONITORS

	Exc VAT	Inc VAT
Philips CF1114	155.65	179.00
Philips CM8533	233.91	269.00
Philips BM 7502	70.43	81.00
Philips BM 7522	75.65	87.00
Taxan KX1201G P31	88.70	102.00
Taxan KX1202G P39	94.78	109.00
Taxan KX1203G	97.39	112.00
Taxan Sup. Vision 2	277.39	319.00
Taxan Sup. Vision 3	319.13	367.00
Microvitec 1451MS	223.48	257.00
Compact & Master - phone for latest price (Prices inc. BBC Cable)		

Phone for our best price before placing your order

EDUCATIONAL & GOVERNMENT ORDERS WELCOME

All products have a 12 month no quibble guarantee

Prices subject to variation without prior notification

We are closed all day Wednesday

Carriage 92p (80p + VAT) Securicor £6.90 (£6.00 + VAT)

WeServe



Next day delivery
by Securicor



Acorn Dept.
128 West Street,
Portchester,
Hants.
PO16 9XE.
Tel: 0705 325354

NEVIS



since 1970

ALL DISCS TESTED INDIVIDUALLY 100% GUARANTEED

5 1/4" S/S DD	10'S	£9.00
D/S DD 96TPI	10'S	£9.50

FREE LIBRARY BOX WITH 10'S
V.A.T AND POST/PACK, INCLUDED.

BULK PURCHASE DISKS

		50	100	250
5 1/4" S/S DD		£27.50	£50.00	£120.00
D/S DD (96)		£32.50	£60.00	£145.00
3 1/2" S/S DD	10'S	£15.95		
D/S DD	10'S	£19.95		
3" D/CF2	10'S	£29.95		

NEVIS RECORDS LTD.

76, MUSWELL HILL ROAD
LONDON N.10. 01-883 7656




AA183

CIRKWIK Schematic drawing on the BBC micro



A lightpen or trackerball
driven CAD package
orientated to the
production of schematic
drawings, such as circuit
diagrams, flow charts,
power systems, pipework
diagrams, fluid logic
diagrams and many similar
engineering applications.

- * Lightpen or trackerball driven
- * Virtual screen 8x the BBC's mode 4
- * Uses standard dot matrix printer in dual-density graphics mode to produce excellent quality diagrams
- * Automatic parts list generation
- * Up to 640 different symbols may be in use in any one drawing
- * Total symbol library unlimited in size
- * Create your own symbols on a highly magnified scale
- * Many electronic symbols already included in the package



CIRKWIK Program for lightpen only	£19.95
CIRKWIK Program for trackerball/lightpen	£24.95
CIRKWIK Program for Grafpad/lightpen	£24.95
DATAPEN Lightpen	£25.00
Trackerball	£29.95

Please send your cheque/P.O./ Access No. to:

Dept. AU3
Datapen Microtechnology Ltd, Datapen
Kingsclere Road, Overton,
Hants RG25 3JB. Tel: (0256 770488)
SAE FOR FURTHER DETAILS

QUESTION:- What is the difference between a BBC with System Delta and an IBM with dBase II ?

ANSWER:- Over £2000 !

Look more closely and you will find further differences. System Delta has 150 commands which are written as an extension to the 128 BBC BASIC commands. Programs are written using BASIC - a language that most programmers already know, thus reducing the learning curve. System Delta is compatible with all BBC systems and doesn't need the additional purchase of a second processor.

Demonstrations of Graph and Reports programs at the recent Acorn User Show confirmed the speed and power of System Delta and BBC BASIC. Several dBASE programmers quoted at least 1/2 day and 5-6K of program for the graph which was achieved in just TEN minutes and 13 lines of BASIC. This power and flexibility of System Delta is available to you at **ONLY £64.95** so why spend more?

FREE CARD INDEX

Many people buy System Delta purely for the powerful, versatile, Card Index which has received many excellent reviews and been quoted as "exceptionally simple", "ranks with the best databases", "fast and versatile", "a great innovation with its flexibility", "unreservedly recommended" - - what's more, it's **ABSOLUTELY FREE!**

PRINTERS ANGEL

NLQ Font Designer

Define your own character fonts for the popular NLQ printers. Fast machine code screen handling routines for fast, simple character definition. Banner mode for designing multiple character definitions. Slant/unslant for easy italics. Create part fonts for merging character sets. Definable figure of eight grid for character design and size consistency. 5 popular type fonts provided. Needs 6264 RAM chip (£6 Extra).



£27.95

APPLICATIONS

- for use with System Delta ROM
FLEXIBILITY, EFFICIENCY and SIMPLICITY are the key features :

MAILSHOT - mailmerge and labels	£19.95
VIDEO RENTAL - for efficient shop management	£54.95
SCHOOL ADMINISTRATOR - the most flexible system available	£69.95
HOTELIER - 80 room comprehensive management, bills, mailist	£59.95
NEWSAGENT - Time saving and informative.	£54.95
ORDER PROCESSING/INVOICING - unbeatable on flexibility	£45.95
SALES LEDGER - merge with invoicing or use on its own	£45.95

SYSTEM DELTA REFERENCE GUIDE

Programmers can write their own programs quickly and efficiently with the aid of the 160 page Reference Guide which contains full technical details, example usage and even a fully explained relational tutorial program. **£19.95**

CUSTOMISATION

Any application may be customised or you may have your own system written for you. Contact us if you have an application in mind - it may well be under development at the current time.

PLEASE SEND BY RETURN ☐

PLEASE SEND FURTHER DETAILS ☐

- System Delta with FREE Card Index ☐
Reference Guide ☐ Video Rental ☐
School Admin ☐ Mailshot ☐
Order Entry/Invoice ☐ Hotelier ☐
Sales Ledger ☐ Printers Angel ☐

Cheque/Access No.

Name.

Address.

Ref A011.6

MINERVA SYSTEMS,
69 SIDWELL STREET, EXETER,
DEVON, EX4 6PH. Tel: 0392 37756

B+S COMPUTING (NOTTM) LTD
55 CEDAR AVE., LONG EATON,
NOTTINGHAM, NG10 3JQ.

BUSINESS SYSTEMS ☆ HARDWARE ☆ SOFTWARE
VIDEO SYSTEMS ☆ MEDIA SUPPLIES

Callers welcome to our Distribution Centre.
Please phone for appointment.

Telephone: 0602-736273 **Acorn** approved dealer

ACORN PRODUCTS

BBC Master 128	£399(a)
BBC Master ET (Econet filing system only)	£328(a)

BBC MASTER COMPACT

Phone for special package offers

Turbo Upgrade	£100(c)
Turbo 512 Upgrade	£329(a)
SC Upgrade	POA
Master Eprom Cartridge	£13(e)
64K Upgrade kit for B+ 64K	£29(d)
Z80 Second processor	£324(a)
6502 Second processor	£164(a)
1770 Disc Interface	£40(e)
ADFS ROM (BBC B+ or BBC B with 1770 Interface)	£25(e)

DOT MATRIX PRINTERS

KAGA KP810 80col/150cps + 27 cps NLQ	£219(a)
Mannesmann Tally MT80 + 80col/100cps	£161(a)
Mannesmann Tally MT85 80col/180cps + 45cps NLQ	£314(a)
EPSON LX85 80col/120cps + 16cps NLQ	£209(a)
EPSON FX85 80col/160cps + 32cps NLQ	£329(a)
EPSON LX800 80col/200cps + 67cps NLQ	£494(a)
JUKI 5510 80col/180cps + 30cps NLQ	£229(a)

★ SPECIAL PRINTER OFFERS ★

Juki 6100 (Daisy wheel) 20cps	£229(a)
MP Daisy Junior (Daisy wheel) 14cps	£149(a)
Canon PW1080A (Dot Matrix 80col/150cps + 27cps NLQ	£219(a)
Citizen 120D 80col/120cps + 25cps NLQ	£150(a)

★ PRINTER RIBBONS & ACCESSORIES

Epson 8143 Serial XON/XOFF + Buffer	£26(d)
Epson 8148 Serial XON/XOFF + 2K Buffer	£59(d)
Epson LX80/86 Ribbon (compatible)	£2.89(c)
Epson 8302 LX80/86 Tractor Unit	£19(c)
Epson 8338 LX80/86 Single sheet feeder	£49(b)
Epson MX80/FX80/FX85 Ribbon (compatible)	£2.24(e)
Citizen 120D Ribbon	£4(e)
Mannesmann Tally MT85 Fabric Ribbon	£4.50(e)
Mannesmann Tally MT85 Carbon Film Ribbon	£5.50(e)
Mannesmann Tally MT85/MT86 Font Cartridge	£17(e)
Centronics Parallel Printer Lead (1.5m)	£5(e)
Full range of ribbons & accessories supplied - call for details	

MONITORS

Philips BM7502 High res mono green + sound	£69(a)
Philips BM7522 High res mono amber + sound	£74(a)
Philips CM8501 STD res colour RGB + sound	£174(a)
Philips CM8533 Med res colour RGB + composite video + sound (Green screen switcheable)	£239(a)
Philips CF1114 TV/RGB monitor	£169(a)
Hantarex Med res colour RGB/½CV + sound	£159(a)
Microvitec 1431MS STD res colour RGB	£179(a)
Microvitec 1451MS Med res colour RGB	£224(a)
Microvitec 1441MS High colour res RGB	£375(a)
BBC Master Monitor Plinth	£12(b)
Master Monitor Plinth with Shelf	£22(b)

All monitors are supplied with a free BBC lead

DISC DRIVES

Opus 5401 single SS 40T 100K	£73(a)
Opus 5802 Single DS 40/80T 400K	£91(a)
Opus 5802SD Single DS 40/80T 400K + PSU (Dual case)	£109(a)
Opus 5802D Dual DS 40/80T 800K + PSU	£214(a)
Opus Challenger 3: 256K Ram Disc	£165(a)
Opus Challenger 3: 512K Ram Disc (2 x 256K)	£200(a)

DISCS

3M 744 SS/DD 48TPI 5.25" (Box of 10)	£11(d)
3M 745 DS/DD 48TPI 5.25" (Box of 10)	£13(d)
3M 747 DS/DD 96TPI 5.25" (Box of 10)	£17(d)
3M 355S SS/DD 3.5" (Box of 10)	£23(d)
3M 355DS DS/DD 3.5" (Box of 10)	£33(d)
Library Cases £1.50(e) or £1.00 if purchased with discs	

FANFOLD PAPER AND LABELS

2000 x 1 part 60gm 11" x 9.5" STD perf.	£11(c)
1000 x 1 part 85gm 11" x 9.5" Micro perf.	£9(c)
1000 x 1 part 90gm Perfect A4 Micro perf.	£13(c)
1000 x 2 part NCR 60gm 11" x 9.5" STD perf.	£17(b)
1000 Labels 90mm x 36mm	£4(d)
1000 Labels 90mm x 49mm	£6(d)
1000 Labels 102mm x 36mm	£5(d)

Please state single or twin row when ordering labels

AMX MOUSE AND SOFTWARE

AMX Mouse and Super Art	£65(d)
AMX Pagemaker	£37(d)

Please state computer (B/B+/Master)

MODEMS

Miracle WS2000 + BBC Lead	£100(c)
Miracle WS2000 Auto Dial Board	£28(d)
Miracle WS2000 Auto Answer Board	£28(d)
Miracle WS3000 V2123 + BBC Lead	£269(a)
Miracle WS3000 V22 + BBC Lead	£449(a)
Miracle WS3000 V22bis + BBC Lead	£589(a)
Miracle WS4000 V2123 + BBC Lead	£144(a)
Miracle Databeeb Communications Rom	£24(e)
Pace Nightingale + Commstar + BBC Lead	£114(c)
Nightingale Auto Dial/Auto Answer Board	£44(d)
Nightingale Auto Dial/Auto Answer Software	£10(e)
Pace Obbs Bulletin Board Software	£19(e)

*** Please note: BAPT approval on modems only ***

LANGUAGES

Micro-Prolog	£49(d)
ISO-Pascal	£42(d)
Logo	£44(d)
BCPL	£37(c)
Forth	£32(e)
Comal	£32(d)
Lisp	£32(e)

BUSINESS SOFTWARE

View 2.1	£37(d)
View 3.0	£57(d)
Hi-View	£37(d)
View Sheet	£37(d)
View Store	£37(d)
View Spell	£37(d)
View Plot (Disc)	£21(e)
View Index (Disc)	£10(e)
View Printer Driver Generator	Tape £7(e)
Disc £8(e)	
Inter-Sheet	£39(d)
Inter-Chart	£28(d)
Inter-Base	POA
Inter-Word	£39(d)
Wordwise	£30(d)
Wordwise Plus	£37(d)

UTILITIES

Fleet Street Editor (Mirrorsoft)	£31(d)
Fleet Street Editor Fonts and Graphics (Mirrorsoft)	£11.75(e)
Fontwise Plus (Clares Micro Supplies)	£16(e)
Replica III (Clares Micro Supplies)	£10.50(e)

Please state 40 or 80 track when ordering

BOOKS (No VAT on Books)

Master Reference Manuals: Part 1	£14(d)
Part 2	£14(d)
Advanced Master Reference Manual	£19(d)
Lisp	£6.50(e)
Forth	£6.50(e)
ISO Pascal	£6.50(e)
BCPL	£14(d)
View Guide	£4.50(e)
Into View	£4.50(e)
View 3	£9(e)
View Sheet	£9(e)
View Store	£9(e)

* Large range supplied - phone for details

ROM BOARDS

ATPL 'Sidewise'	£36(d)
-----------------	--------

UK Customers: please add 15% VAT to all prices (including carriage). Government and educational establishments official orders welcomed. When ordering please enclose a cheque or postal order for the appropriate amount. UK Carriage Rates (a) £8.50 - courier insured delivery (b) £3.50 (c) £2.50 (d) £1.50 (e) £1.00. All prices are correct at time of going to press. All offers are subject to availability. All prices are subject to change without prior notification and are available on request. Current price list is available on request.

The EDWORD 2 SUPERPACK

lets pupils explore language - it puts pupils in control

Progression
with
Teacher and
Pupil Needs

EDWORD2

Field
Testing
in Schools

Applications Pack
with
Classroom
Case Studies

EDWORD 2

ED ucational WORD processor system

SUPERPACK

EDWORD

is an open-ended word processing tool which encourages independent pupil use and progression. It develops an awareness of language, creative writing and clear communication of thoughts and ideas.

The package includes:

Accents for Modern Languages · Mailmerge
Conversion to ASCII Files · Concept Keyboard Usage
Automatic Headers and Footers · Jumbo Print
Newspaper Column Printing · Electronic Mail Feature
Saving sequences of commands · Multi-Copy Facility

Other Features

- Prints exact copy of screen display
- Helpful, easily-understood error messages.
- Flexible for all pupil abilities
- Fully comprehensive documentation
- Suitable for BBC Model B, B+ and Master
- Single key depressions for most commands
- Built-in safety features

"... to ignore its potential with children would be shortsighted ... if I

were an LEA Adviser, I'd be making a bulk purchase for all the schools in my area ..."
(E D Thomas, A + B Computing)

"... using a concept keyboard with EDWORD should have tremendous possibilities for language development ... I am looking forward to its potential in the Infant Department ..."

(Sarah G Reid, Central Primary School, Limavady)

"... EDWORD's development with children in mind made it the best choice for the primary school ..."

(Peter Heaney, Northern Ireland Council for Educational Development)

Creative
Writing



CLWYD TECHNICS LIMITED

Unit 4B, Antelope Industrial Estate
Rhydymwyn, Nr. Mold, Clwyd CH7 5JH.
Tel: (035283) 751

Micro-Electronics Manufacturer, Distributor and Publisher

Personalised
Business
Letters

School
Magazine

Mailable
Copy



Quantity discounts and Licensing
Agreements available.
Export Enquiries welcome.

EDUCATION

NEWS

Hints for new users

● The Compact's price means that, as an Econet station, the full colour version is considerably cheaper than using a Master Econet station at £399 without disc drive or monitor.

● Education authority computing centres are going to be doing big business in converting between the two disc filing systems and the two sizes of disc – try Advanced Computer Products' Advanced Disc Toolkit which will take all the sweat out of the operation.

● If your programs do something illegal, beware – there is a new Basic in the Compact.

● You may find that Blu-tak comes in handy when using function key strips.

● Watch out for peculiarities of the ADFS in operation. The computer stores the disc catalogue and other information in RAM. Change the disc and then catalogue it and the same catalogue as before comes up. You must use MOUNT.

● If you need to back up 3.5in discs and have no double drive then prepare for hard work. If you are good at it it will take you about 10 minutes. Remember a 'large' formatted disc contains about 640k.

● Although the Compact takes up less space than a BBC B or Master, you will need to keep the keyboard well away from the disc drive-cum-monitor stand – if you want to get your discs in the drive, that is!

Advanced Computer Products, 6 Ava House, High St, Chobham Surrey, GU24 8LZ. Tel: (0276) 76545.


Compact impressions

Acorn's latest offering, the Master Compact, has been with us now for a couple of months and first-time users are able to give some impression of the impact of the various new directions started in this machine. One factor that distinguishes the Master series is the wide base of education software already available.

Acorn, unlike other manufacturers, has specifically cultivated software houses from all shades of computer use for the Master and the Compact. Machines that come with a ready made software base have much more credibility than others built on promises.

Nonetheless, there has been criticism of the pruning of interfaces and ports for communicating with the outside world. The problem is that those ports are the main cause for the expense of the computer – remove them and the price plummets. If you select which ports you are going to remove you will always displease someone, however. Probably the most noticeable omission for educational users is the User Port. Concept keyboards, mice, plotters, control equipment and a whole range of other devices are reliant on the existence of that port on both BBC B and Master micros. On the Compact we have an edge connector of mysterious character and an Atari-style joystick port which no BBC micro joysticks fit!

Why? Acorn are not stupid – despite the very good act they sometimes manage to put on.

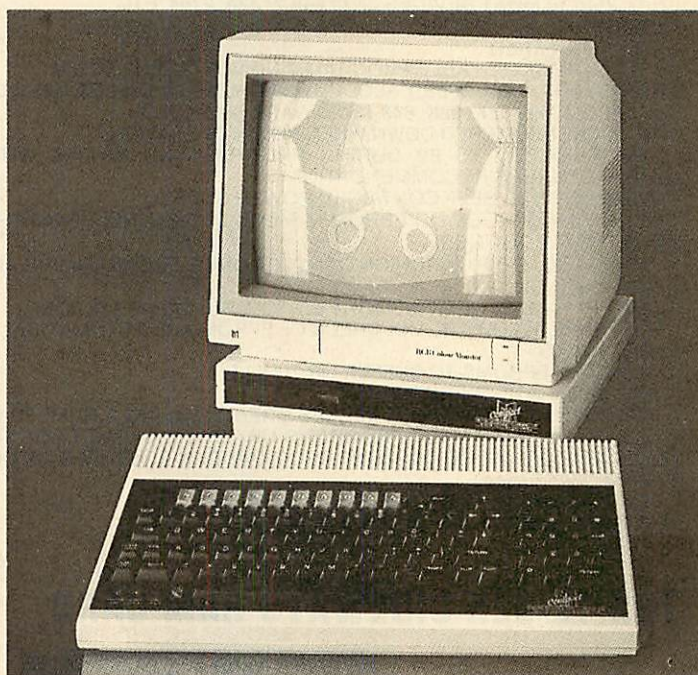

The old joystick port – the analogue port for the technically minded – is an expensive interface and notoriously inaccurate. The new-style port is not analogue but digital and hence there is an improvement in accuracy.


Why no User Port? The digital joystick port will perform many of the functions that the User Port did. Many, but not all. Mice can happily be adapted to run off that port – as can the Concept keyboard. Their software will need to be modified because different lines in and out are being addressed. Control applications will not have much joy here without a major re-think. People have become so used to hanging a variety of devices onto the User Port that the connections needed are ingrained into their

memories. The combination of the edge connector and the joystick port can be made to emulate the User Port exactly – something done by Resource with their Compact User Port add-on, which replicates all functions of the User Port.

The edge connector on the Compact provides the perfect facility for enterprising companies to create a cartridge system. Second drives are standard from Acorn but there will be Winchester, the Viglen DUCC to dual up 5.25in drives with the 3.5in, second processors, and so on. In effect, it is unlikely that there are many Master facilities that will not soon be available in some form for the Compact.

Contact Resource, Exeter Road, Doncaster DN2 4PY. Tel: (0302) 63800.

AT LAST AN EPROM PROGRAMMER POWERFUL ENOUGH TO MATCH THE MASTER.



The new MICRON 64K PLUS is now launched. NO OTHER EPROM PROGRAMMER can match the specifications yet it costs less than the competitors which offer far less. THE MICRON 64K PLUS runs on ANY VERSION of the BBC FITTED WITH A 1.2 OPERATING SYSTEM OR GREATER, VERY SIMPLE TO use with no switches to select. Two leds indicating power and programming are situated on the front panel. Plugs into 1MHz bus.


ATTRACTIVELY CASED IN CUSTOM BUILT SLOPING METAL BOX AND SPRAYED IN BBC MATCHING COLOURS.

THE SPECIFICATIONS:

- * FULLY MENU DRIVEN.
- * WILL PROGRAMME 2716, 2732, 2764, 27128, 27256, 2532, 2564, 27512, 27513, 2516, IE MOST DEVICES 2K to 64K 2732A, 2764, ETC...
- * PROGRAMS ALL EPROM'S 32K OR LESS IN A SINGLE PASS.
- * FULLY BUFFERED
- * SOFTWARE SELECTABLE PROGRAMMING VOLTAGE 12.5/21/25.
- * NORMAL OR HIGH SPEED ALGORITHMIC METHOD CAN BE USED ON ALL EPROMS 8K, 16K, 32K, 64K (SOFTWARE SELECTED).
- * ZIF SOCKET POWERED DOWN WHEN NOT IN OPERATION.
- * VCC IS RAISED TO 6V DURING PROGRAMMING IN LINE WITH MANUFACTURERS RECOMMENDATIONS.
- * MAINS DERIVED SELF CONTAINED POWER SUPPLY.
- SOFTWARE SUPPLIED ON EPROM IS MENU-DRIVEN INCLUDING THE FOLLOWING ROUTINES:
- * AUTOMATIC VERIFICATION ON COMPLETION OF PROGRAMMING AND FAULT LISTING.
- * BUILT IN FULL-SCREEN MEMORY EDITOR (BUFFER IS 32K LONG)
- * SOFTWARE ALLOWS BLANK CHECK OF EPROM AND AUTOMATICALLY LISTS FAULTS.
- * WILL COPY EPROMS TO BUFFER OR TO FILE.
- * WILL GENERATE CHECKSUM.
- * BBC FORMAT ROM IMAGES MAY BE CREATED USING A NUMBER OF BASIC OR MACHINE CODE PROGRAMS UP TO THE CAPACITY OF THE SELECTED ROM. MORE THAN ONE PROGRAM CAN BE STORED ON ONE EPROM.
- * SOFTWARE SECOND PROCESSOR COMPATIBLE.

PRICE ONLY £68.00 + £10.20 VAT + £3.00 P&P.

THE 16/32K SIDWAYS RAM CARD

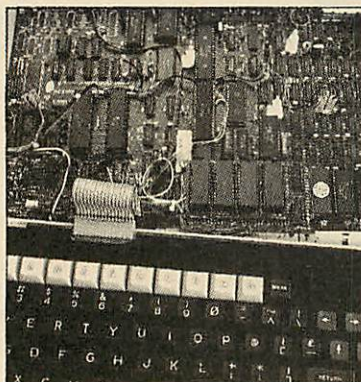

A small, neat, no fuss board which hides neatly under the keyboard. This is available in either 16 or 32K versions. The 16K version is easy to upgrade to 32K. A write protect switch is fitted and software is available and can be addressed direct. Econet compatible.

Cost:
Complete with 16k of Sideways RAM £29.00 (VAT 4.35) Total £33.35
Complete with 32k of Sideways RAM £35.00 (VAT 5.25) Total £40.25
Upgrade from 16k to 32k £9.00 (VAT 1.35) Total £10.35

All HCR's products are designed and manufactured by the company and carry a full year's guarantee with full technical backup available.


ORDERS TO:

**H.C.R. ELECTRONICS,
H.C.R. HOUSE, BAKERS LANE**

INGATESTONE ESSEX CM4 OBZ. Tel (0277) 355407/8

SPECIAL OFFER WHILST STOCKS LAST EPROM PROGRAMMER FOR THE BBC

A very high quality product direct from the manufacturers, contained in attractive sloping box with low insertion force socket and neon indicator for programming fitted as standard, the software adopts the high efficiency method for programming 2764 and 27128. This allows up to 100% faster programming, software in machine code, supplied on cassette and can be placed in eeprom. Very easy to use, menu driven with easy to use instructions. This unit is completely self contained and plugs into the user port.



THIS PROFESSIONAL UNIT ALLOWS:

1. Will program: 2716, 2732, 2532, 2764 and 27128 eeproms.
2. Copy eeprom into memory and compute checksum.
3. Blank check eeprom.
4. Program eeprom from memory.
5. Verify byte by byte and compute checksum.
6. Allow buffer start area to be changed.
7. All operating system calls may be used when in menu mode.
8. Semi-intelligent programming. Typical time to program a 2764 8k device is approx. 50 sec. depending on the data to be programmed.
9. Additional software supplied to enable your own program (basic or machine code) to be put into eeprom with the necessary leader information to allow calling with a *command. Downshift routine to enable basic programs to be run is also supplied.

please add 15% VAT £1.00 post and packing

ONLY £35

ALSO AVAILABLE RAM/ROM CARD
(Details on Request)

28 pin zif sockets suitable for plugging into ROM sockets £8.00 + VAT

AA95B

THE EXTERNAL ROM/RAM UNIT

NOW INCORPORATING MORE FACILITIES THAN BEFORE AT NO EXTRA COST.

A very powerful system which allows total flexibility for the user with a capability of 24 ROM sockets plus 64k of Sideways RAM (not supplied) built in a sturdy metal case with hinged lid for easy access, and sprayed BBC Oatmeal colour. Much thought has gone into the design of this unit to incorporate as many features as possible.

SOME ADVANTAGES:

- *Allows up to 24 ROMs plus 64k of RAM or various combinations for the customer's requirements
- *Easy to install. No Soldering. Takes no more than 15 mins
- *Own power supply, no over heating
- *Write protect switch fitted for RAM
- *No access into BBC required after initial installation
- *Does not physically interfere with other internal expansion add-ons
- *Computer will still function with external unit unplugged (using ROM resident in BBC)
- *Accessible for installing or removing ROMs

NEW FEATURES

- *Battery backup facility
- *32k of RAM on each card
- *Read protect link

The Unit

The case comes complete with an inbuilt power supply and one board capable of offering 12 Extra sockets plus the four in the BBC. 32k of Sideways RAM can be fitted to this board losing only 2 ROM sockets. A second board identical to the first can be fitted at a later date, giving a total capability of 28 sockets for ROM/RAM. Write protect toggle switch is fitted on the case and protects one or both boards. Read Protect Link again fitted to both boards. The installation of the unit is simple and should take no longer than 15 mins. The second card 1 min.

Cost:

Unit complete 1 board £75.00 (VAT 11.25) Total £86.25
Second board £29.00 (VAT 4.35) Total £33.35
Post £3.00

ORDERSTO:

**H.C.R. ELECTRONICS,
H.C.R. HOUSE, BAKERS LANE, INGATESTONE
ESSEX CM4 OBZ. Tel (0277) 355407/8**



EDUCATION

NEWS

Getting behind the Times

Users of The Times Network for Schools (TTNS) are often frustrated by the expense of training children to use the system. This problem has been noticed and acted on by two organisations - LTS and Countesthorpe College.

LTS has produced a package called *Macemail* which enables network users to treat their network as if it were individual computers communicating via a Telecom Gold-style system. The package was developed by Mace under the Microelectronics Education Programme but has since been taken over by LTS for publication. The documentation is exceptionally clear

and the user is guided step by step in integrating the package into the Econet system. Versions are available such as mailing express, sending to all users and filing messages. There are extensive teacher's notes which explain ways in which the package can be integrated into the curriculum.

The second program, *Mailbox*, was developed by Simon Goodall, Head of Computer Studies at Countesthorpe College. This package will also run on more than one network, 'with a little imagination', and some of Simon's ideas for use of the network stand repetition: 'The group were studying

the use of computers by the police. I set up a database of about 50 records each containing fictitious information about a criminal.

The group were given a scenario about a gang of bank robbers... each group had clues which pointed to members of the gang but not so they could be identified directly from that clue. Each small group then had to convey their information to the other groups (police forces) using the mailbox program.'

Macemail, LTS, Haydon House, Alcester Road, Studley, Warwickshire. *Mailbox*, Countesthorpe College, Leicester.

Penny's plan for Logo

If you want to know about Logo it would be worth buying the useful volume by Ros Penny entitled *A Guide to Logo*. This excellent little book is one of a series of 12 published by the Computer Education Centre at Liverpool Polytechnic.

It is intended to give teachers some idea of what Logo is, explain the jargon, compare the features of 10 commonly available Logo packages and indicate the types of primitives teachers should look for if they want a Logo suitable for specific purposes such as control or animated graphics.

The book is pleasantly presented and does not patronise the newcomer. It is based on Ms Penny's experience and her desire to see Logo as a more universally adopted programming language. Indeed the lack of a coherent policy on Logo has prompted her to put forward proposals for a National Logo Centre. She sees the language as having applications in both primary and secondary schools especially in problem-solving and communication applications. Logo can improve mathematical ability, says Ms Penny, and develops a general awareness of the impact of IT. She argues for a plan for teacher training, liaison with developers, users and publishers, specific curriculum development projects and centralised reference collection of Logo implementations, software and publications.

Contact Ros Penny, Millbrook College of FE, Liverpool L11. *A Guide to Logo* may be obtained from the Computer Education Centre, Liverpool, Polytechnic, 70 Mount Pleasant, Liverpool L3 5UX.

Get your pictures digitised

Parkside Developments are offering a digitising service aimed primarily at owners of AMX *Pagemaker*. Monochrome photographs or line drawings up to 12in by 10in can be accommodated. An 80-track disc will hold up to nine pictures and a 40-track disc, four pictures.

The service is offered at £1.50 per picture plus £2.80 to cover the cost of the disc, postage and packing. Details from Parkside Developments, 9 Ingelby Gardens, Chigwell, Essex IG7 6EH. Tel: 01-500 5701.



Digitised heroes from Parkside

EDUCATION TOP FIVE

Title	Publisher	Cassette	Disc	ROM	Machines*	Econet
1 Number Chaser	Acornsoft	£6.99	£11.50	—	B/B+/E	No
2 Words Words Words	Acornsoft	£6.99	£11.50	—	B/B+/E	No
3 Best 4 Language	ASK	£19.95	£19.95	—	B/B+/E/M	No
4 Best 4 Maths	ASK	£19.95	£19.95	—	B/B+/E/M	No
5 View	Acornsoft	—	—	£59.80	B/B+/E/M	Yes

Compiled by Gallup/Microscope. Publishers: Acornsoft, 645 Newmarket Road, Cambridge CB5 8PD. Tel: (0223) 214411. ASK, London House, 68 Upper Richmond Road, London SW15. Tel: 01-874 6046. *Machines include the following: B(BBC); B+(BBC B Plus); M(Master); E(Electron).

Announcing a Great New Deal for all Primary and Secondary Schools

INTRODUCING


SUBSTANTIAL REDUCTIONS ON ALL PLOTTERS

Plotmate is recognised by many educationalists as one of the most sophisticated and practical plotters available at its price.

Now Primary and Secondary schools throughout the UK can reap the many benefits obtained by using PLOTMATE as an aid to computer based teaching at a cost which is lower than ever before.

This tremendous offer comes about as a result of the unique LINEAR GRAPHICS' EDUCATION SUPPORT SCHEME (ESS).

ESS has been devised and launched by Linear Graphics in order to provide the educational environment with the best possible value for money when purchasing this highly versatile extension to their computer graphics systems.

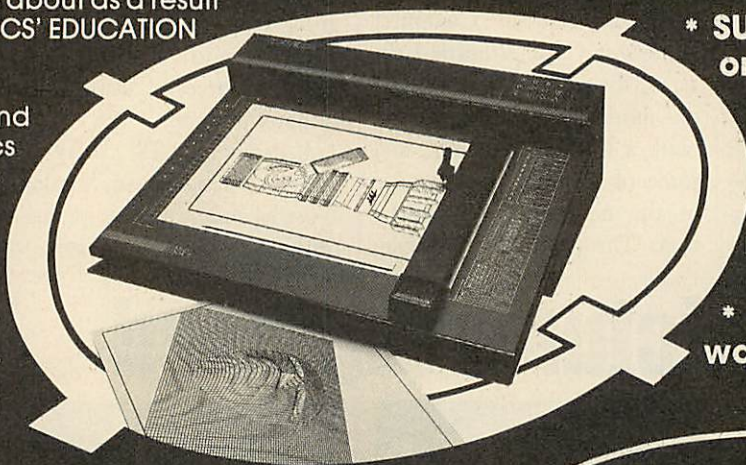

COMPARE THESE PRICES!

PLOTMATE A4	£224 a saving of 25%
PLOTMATE A4M	£299 a saving of 25%
PLOTMATE A3 (with free Cadlink Disk and Plotmate ROM)	£299 a saving of 30%
PLOTMATE A3M	£426 a saving of 25%
SCANNER	£120 a saving of 20%
UPGRADE KIT A3 TO A3M	£150

PLUS save 20%-25% on all plotting accessories.

All prices are ex VAT.

PLOTMATE

LINEAR GRAPHICS LTD

28 Purdeys Way Rochford Essex SS4 1NE
Tel 0702 541663/4/5 Telex 995701

LINEAR GRAPHICS EDUCATIONAL SUPPORT SCHEME

Under the ESS the following features become available:

- * **SAVINGS of up to 30% on normal prices.**
- * **FREE training available.**
- * **SUBSTANTIAL discounts on all Linear Graphics Software packages.**
- * **FULL support and service from the manufacturer.**
- * **TWELVE months warranty.**



PLOTMATE Graphics Plotters are British manufactured products and approved by ILEA.

Please rush me information on Linear Graphics' Educational Support Scheme. I am particularly interested in (please indicate).

NAME _____

POSITION _____

SCHOOL/AUTHORITY _____

ADDRESS _____

TELEPHONE _____

EDUCATION

STOCKING FILLERS

Advise for parents on choosing software
and hardware for their children this Christmas

Chris Drage and Nick Evans

In the education section of the October 1986 issue of *Acorn User*, we looked at some of the issues arising from choosing educational materials for home use. In that article an overview was made of the various types of software that may be appropriate for your child's needs and the conclusion was reached that probably the most valuable approach you as a parent can take is to help the child develop skills. This is achieved through the use of tools type programs such as wordprocessors or databases and also computer assisted learning packages which develop particular skills or knowledge in an interesting fashion.

In this article there will be an attempt to advise parents about the issues facing them if they are contemplating buying computer materials for Christmas.

Many people enter the home computing market with little real idea of why they are buying a machine. The children are probably agitating for a games machine and somewhere in the back of the mind the potential buyer has an idea that the computer must be educationally beneficial otherwise the government would not spend such vast sums of money on them for schools. The outcome of this thinking is that the machine is used for games, a few educational packages are bought which the children look at once and then go back to zapping aliens.

Unless you have a clear reason for your purchase then you cannot choose appropriate machines, peripherals or software, so let's consider some fundamental computing philosophies.

Taking the obvious uses first, the computer is good entertainment. Don't be persuaded that computer games will scar your child for life. If the playing of them becomes obsessive – hour after hour, day after day in order to reach an elusive high score – then you should be concerned. After the first orgy of button-pressing most children will settle down to a steady pattern of occasional play.

Look out for signs that they have improved their general co-ordination as their skill develops. When you are left floundering on the first screen of a game and your



Mice are one of the most liberating additions to a home computer

child is happily dodging the ducks and collecting the eggs on the twelfth screen you will know that they have a skill beyond your own. Moreover, if the game involves logic and planning, look for and encourage a change in thinking processes as they plan the way to trap the spirits by moving the boulders and getting the diamonds. *Repton 2* (from Superior Software) is one of the better logical puzzle games that can give everyone hours of covert educational fun. Educational does not necessarily mean boring. Check for positive qualities in any package you buy.

The second obvious use is for business. How many computer users do you know who really use their computers to do their home accounts? In my experience it is very few. So, what business uses? Wordprocessing is the most obvious but depends upon a printer. Without one, any of this type of software is useless, as are spreadsheets and databases.

Wordprocessing really is the most practical tool that you can offer any child at school age. With it they can create materials for school, prepare homework prior to writing up in longhand and generally improve their language use, syntax and


spelling through the manipulation of text.

A third use for the computer is as a source of information. That information may be something that is resident in the computer's memory or on disc or it may be information gathered from outside. Other computers are waiting to be talked to and the quantity of information they carry is astounding. All it needs is your computer, a telephone line and a modem and the world is your oyster. The obvious candidate for your child's use is Prestel which offers a growing database of 250,000 pages of information relating to nearly every subject. Within Prestel are children's clubs and activities – a notable one is Club 403 in Birmingham which runs a specific education area which is updated on a regular basis. It contains news, puzzles and competitions, general knowledge and materials of interest to parents. Not only that but subscribers in that area of the country can also use the shopping facilities and have groceries and household goods delivered to the door.

Information that is resident in the computer is usually in the 'drill and practice' tradition of computing programs – look at the information, answer the questions and


NEW WINCHESTER DRIVES FROM MIDWICH

The experience gained in two years of supplying Winchester drives for the BBC Micro has established MIDWICH as the only manufacturer capable of supplying Hard Drives fully compatible with Acorn ADFS and Torch Z80 filing systems.



**THE
MAGNUM**

The smallest Winchester currently available for the BBC Micro yet still having a capacity of 20 megabytes, the MAGNUM occupies a volume no larger than a standard single floppy drive.

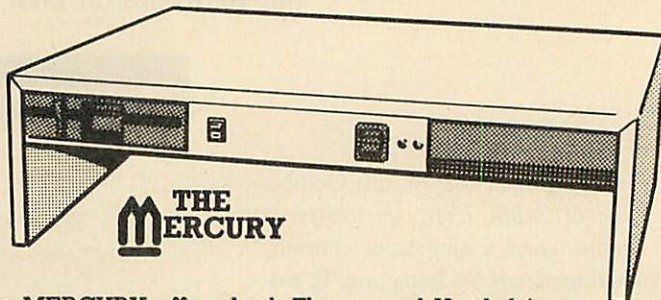

**THE
MERCURY**

The MERCURY offers both Floppy and Hard drives conveniently housed in a Monitor Stand enabling you to contain your entire system in one neat package.

*Interested in the latest mass storage facilities available?
Then why not contact us today*

Both the MAGNUM and the MERCURY feature:

- Full compatibility with:
 - BBC Master Series, Acorn ADFS
 - Torch Z80, MWFS

Please specify interface required.

- Full 12 months part and labour warranty
- Low Cost - High Performance
- 5MHz Disc Data transfer
- Supplied with:
 - User Guide, Utilities disc, Cables



**MIDWICH
THAME
LTD.**

GILRAY ROAD, DISS
NORFOLK, IP22 3EU

A member of the Memec (Memory and Electronic Components) PLC Group

**TELEPHONE:
0379 4131
RING US TODAY!**

University Software

UNISTAT-II MARK 2 STATISTICAL PACKAGE

***FULLY INTEGRATED SUITE OF STATISTICAL PROGRAMS *DEDICATED DATA PROCESSOR *AUTOMATED MISSING DATA HANDLING *
USER DEFINED LABELS FOR VARIABLES *READING DATA FROM ASCII FILES *DIRECTION OF OUTPUT TO PRINTER OR ASCII FILES *
HIGH-RESOLUTION PLOTS *COMPREHENSIVE USER MANUAL**

UNISTAT DATA PROCESSOR: A spreadsheet designed exclusively for data handling. DATA ENTRY: Cursor editing, overwrite/insert modes, continuous entry, insertion and deletion of cells, cols and rows, go to, col labels. FILE HANDLING: Read, write and merge in internal and ASCII format. COLUMN TRANSFORMATIONS: Formulas using cols as variables. Any combination of +, -, *, /, %, LOG, EXP, SQ, ABS, SIN, etc. Operations with col numbers or labels. STATISTICAL COMMANDS: SIZE, MIS (no of missing values in a col), SUM, SSQ, MEAN (adjusted for missing values), Single or multi col sorting in asc or desc order. Ranks. CONDITIONAL FORMULAS: Selection of cases, creation of dummy and effect vars, recoding, breakdown, etc. Logical operators >, <, =, AND, OR, NOT.

MULTIVARIATE REGRESSION: Simple corr matrix, choice of dep var, selection of indep vars, noconstant reg. Selection-specific missing data handling. No. of rows and cols omitted due to missing values and multicollinearity. Output includes estimated coeffs, t-stats, std errors, R², adjusted R², std error of reg, F-stat, D-W stat, ANOVA of reg, var-covar and multiple corr matrices, interpolation, plot of residuals, plot of actual and fitted y values. Addition of residuals and/or fitted y values to data matrix.

STATISTICAL TESTS: Significance levels for most test stats. Test-specific missing value handling. **PARAMETRIC:** One sample t, two sample t with equal and unequal vars, paired t, F, NON **PARAMETRIC:** Chi-sqr and Kolmogorov-Smirnov, (both with equal and unequal exp freq versions), chi-sqr Bartlett, Mann-Whitney U for small, medium and large samples, Wilcoxon signed rank, Walsh, Wald-Wolfowitz runs, Kruskal-Wallis one-way ANOVA, Friedman pseudo two-way ANOVA, Jonckheere trend, Page's L, Cochran Q, Goodman-Kruskal gamma, Somer's d. **CORRELATION COEFFICIENTS:** Pearson, Spearman's rho, Kendall's tau, Point biserial,

Goodman-Kruskal gamma, Somer's d, Yule's Q, phi, tetrachoric. **DISTRIBUTIONS:** Chi-sqr, t, F, Normal (std, non std), log, inverse and bivariate normal, binomial, negative binomial, exponential, hypergeometric, gamma function, Khrgian-Mazin.

DESCRIPTIVE STATISTICS: Analysis of raw data or data with freq counts. Raw data sorted and grouped. Freq dist with choice of lower bounds and class intervals. Absolute, cumulative and relative freq. Histograms, scatter diagrams and time series plots. Output includes sum, mean, mean deviation, median, variance, std deviation, third and fourth moments, skewness, kurtosis, range, etc. **ANALYSIS OF VARIANCE:** One-way with and without repeated measures, two-way with no interaction, two-way and three-way with one, two and without repeated measures.

TABULATIONS: CROSS-TABULATION: Two-way tables with col and row totals and percentages. CHI-SQUARE CONTINGENCY TABLE: Observed freq, exp freq and chi-sqr for each cell. Col and row sums, overall chi-square stat and its significance level. Yates correction.

HIGH RES PLOTS: All plots can be dumped on the printer. **PLOT OF BIVARIATE REGRESSION:** Scatter diagrams with optional line of best fit, intercept, slope, R², std error. **CURVE FITTING:** Fitting of polynomials on bivariate data. Fitted polynomial coeff, R² and std error. **TIME SERIES PLOTS:** Simultaneous plotting of up to 7 columns of data against time. **PLOT OF FUNCTIONS:** Simultaneous plotting of up to two functions, integrals, polynomials and roots of polynomials.

DEFAULT SETTINGS (For BBC version): Choice of screen and device control parameters. 40 or 80 column display, number of data drive 0/1/2/3, black & white or colour monitor width of printer, high-res screen dump command, maximum formula length, maximum number of columns and rows depending on free RAM.

LINTPRO Linear/Integer Programming Package.

Written by Dr D. Sprevak

A professional package which can solve very large problems on a 32K BBC micro by means of revised simplex algorithm and efficient vectorisation. It can solve a problem with 82 variables, 60 constraints and 15 upper bounds in 24 minutes. Runs faster on second processor. Plus or Master series. LINTPRO requires minimal prior knowledge of linear programming techniques and is ideal for real applications as well as for teaching purposes. Data entry in Backus-Naur notation. Selection of optimality of solutions between 0% and 100%. Optional printing of intermediary steps and choice of branching strategies. Output includes optimal values of variables, value of objective function, slackness, shadow prices and it can be directed to screen or to a text file.

CPA Critical Path Analysis

Written by Dr J. S. Dean

A comprehensive coverage of critical path analysis sufficient for most practical applications. Activities and durations are supplied as input and earliest and latest start and finish times for each activity, total float and critical path are obtained as output. Easy editing of inputs provides the possibility of analysing the sensitivity of solutions. A built-in calendar can give dates to any programme. Resources can be allocated to each activity. Suitable smoothing scheme is chosen and a resource bar chart is drawn. Results can be directed to printer or to text files. High-res plot of the node structure can be dumped on printer.

UNISTAT-II, LINTPRO AND CPA ARE AVAILABLE FOR: BBC B, PLUS AND MASTER SERIES, AMSTRAD PCW8256, PCW8512, IBM PC/XT/AT AND COMPATIBLES BBC versions: UNISTAT-II: £125+VAT, LINTPRO: £75+VAT, CPA: £50+VAT. AMSTRAD and IBM versions: UNISTAT-II: £150+VAT, LINTPRO: £100+VAT, CPA: £75+VAT.

Prices include post & packing within the UK. Official (government, university, local authority) orders are welcome. For orders from Europe add £5. from outside Europe £10. For BBC versions please indicate 40 or 80 track format. Cheques and correspondence to: **UNISOFT LTD, P.O. Box 383, Highgate, London N6 5UP.**

EDUCATION

get a score and then re-do the ones you got wrong. This stultifyingly boring educational software still manages to creep into the Top Five educational charts printed in our education news from time to time. However, there is a further approach.

You may remember that when you were young great store was laid by a capacity for general knowledge. This embodied a desire for children to know obscure facts of little relevance to day-to-day living but which popped up in quiz shows. Do you know when the next total eclipse of the sun is visible from Cornwall? Enterprising salesmen turned that obsession into *Trivial Pursuit* and you will not be surprised to hear that it is available as a computer game (from Domark).

If you tie in all of the above with the general education programs that were mentioned in October's article you will have a broad overview of some elements of a potential educational computing strategy for your home. Fundamentally you have to decide whether or not to treat the computer seriously. Is it a toy or is it a practical tool? If it is a toy then it is likely to go the way of all toys. If not then it needs some planning to get the best from it.

If you decide that Prestel is a useful way to spend your money and broaden your child's horizons then you should take into account a few of the consequences. First, on-line communication is not cheap. As well as the subscription charge to Prestel (£6.50 per quarter) and the phone bills (local call rate in most of the UK), there is also the connection charge (6p per minute between 8am and 6pm) and a frame charge for any page that has charge attached to it.

All of this sounds expensive. If you use the system after six in the evening and avoid charged pages however, you will have a good deal of computing value for about a pound an hour and £6.50 a quarter. It's worth remembering as well that the breadth and quality of information to which you will have access is wide ranging and quite astonishing.

By using the Gateway system, to have access to other computers which will supply a variety of information. The one springing to mind that specifically relates to home education is the ECCTIS database (Educational Counselling and Credit Transfer Information Service) which will help your child to decide on which courses in further and higher education to pursue and their location. Also the COIC (Careers and Occupational Information Centre) database which has careers in-

Clares Micro Supplies are supporting the Master Compact Computer from Acorn with compatible versions of their best selling packages. In addition Clares are writing applications specifically for this new machine that will utilise most of the features that it offers such as the ability to write/read two screens flexibly, improved graphics ability, and faster ADFS access. Work has already borne fruit with the launch of Artroom to coincide with the launch of the Master Compact, and as you can see today, together with Fontwise+, fantastic results can be squeezed from your dot-matrix printer. Artroom is available on disc in sideways ram or Eprom format and comes with support software in the form of advanced printer routines and ready made graphics. Great computers are no different from the others without good quality software, and we think you will agree that Artroom will help you enjoy this new machine and at the same time put it to some good use. Artroom is totally icon driven from a pull down menu, and leaves the whole screen available for use. Unlike other mouse drawing packages Artroom has been written to direct output simply to your printer and to this end every function is uncomplicated and easy to use. Almost everybody would like to be able to produce something artistic on their computers but not everybody can. Available on the support disc are a multitude of ready made images for the user to

manipulate or simply to use. This is however just a taster as future releases promise more graphics, more fonts and utilities that will enable any graphic image produced on an Acorn computer to be manipulated by Artroom regardless of mode and a quality text/graphic page/document utility to use with your own word processor. Customised logos or any other artwork can be done to order by the authors of Artroom and suggestions of topics or other ideas you would want included in forthcoming graphics discs are welcome. Needless to say the authors wrote this application on Clares Macrom Assembler and also use their other utilities such as Fontwise Brom+ and Ramrod during any software development.

Artroom provides the graphics, and text is added from Fontwise

formation on more than 300 occupations.

To communicate you will also need the relevant software and hardware. A modem is a device which interprets, transmits and receives computer information. If you are only going to use it for Prestel then a simple modem is all that is needed. One may be available free if you subscribe to Micronet 800 which is a part of Prestel. This will also open up to you extra pages that are otherwise restricted as a CUG (Closed User Group). If you feel that you may need to communicate with other computers that transmit at different rates, for example on the Telecom Gold System, then you will need a more complex modem with a selection of baud rates (transmission

and reception rates). The most common rates are 1200/75 (Prestel), 300/300 and 1200/1200. The first figure stands for the speed of reception of information, the second for the speed of transmission. Three hundred is roughly equivalent to a very fast typing speed. Although the practice of on-line communication may not be the cheapest computer application, it certainly is one of the more rewarding and is limited only by the scope of the system accessed.

Nearly any additional device you decide to hang on to your computer will cost a moderate amount of money. By their nature and complexity, peripherals such as printers, disc drives, monitors, plotters and all the paraphernalia of control technology

65(C)02 Development System for the BBC Micros.

Fast Assembler
Fast Linker
Flexible Loader
Fully Relocatable
No code restrictions

Write for details or
phone 096289352 after 6.0pm

**Only £22 for disk
optional ROM £7.50**

**Code and Data
separation**

for ROM or RAM code.

Disc or ROM
Library Included
Absolute option
Modular Source
Debug package

Fully compatible with standard MASTER and Second Processor.

All code can be saved fully assembled and quickly and automatically linked anywhere in memory. Use the assembled library provided and add your own routines. Final linking is FAST. Save edit time, save assembly time, save listing paper.

'Excellent value for money' – Viewfax Tubelink

Please state 40T or 80T, single or double sided disc

**Free Update to 'Symbolic'
Debug for December orders.**

6502 or 65C02 version.

**Highly recommended for
educational use.**

Mijas Software

PO Box 2, Sutton Scotney, Winchester, Hants. SO21 3LU

Educational Software NOW MASTER AND GCSE COMPATIBLE

LCL

**MICRO
FRENCH**

NEW



**For any BBC Micro, Electron
(Tapes, 40/80 track discs
Econet compatible)
Commodore 64, ZX Spectrum, Amstrad PCW,
unexpanded Vic, ZX81, Apple, PET, Amstrad**

IMMEDIATE DISPATCH

Tel: 0495 579345 (10am-10pm)

Send coupon, or phone orders or
requests for free colour catalogue
to: LCL (DEPT A) Melody House,
Greys Road, Henley, Oxon.

**£5 off total for 2 courses,
£10 off for 3, £17 for 4**

MICRO FRENCH (NEW) 24 program self-tuition GCSE ('O'-level)
course with real speech, prepares you for both oral and written exam.
2 discs/tapes, 2 books + voice tape £24.

MICRO MATHS 24 program revision or self-tuition course taking
beginners (from 8yrs) to O-level. (GCSE) Includes 59 topics on 2
discs/tapes plus two books (now has more colour graphics). £24.

MICRO ENGLISH Complete English Language self-tuition and revision
course, to O-level, (GCSE) of 24 programs. Includes "Speak-
and-Spell" with real voice. £24.

MEGAG MATHS 24 program step by step. A-level course of 105
topics for mature beginners, A-level students and Micro Maths users
(2 discs/tapes & 2 books). £24.

VISA

**WORLD LEADERS IN COMPLETE SELF-TUITION
COURSE SOFTWARE (IN 24 COUNTRIES)**

Excellent reviews

Run by Hons. graduates. Meet us at all major shows

NAME ADDRESS

TITLE COMPUTER 40/80 Disc/tape

AA41

BBC/ELECTRON EDUCATIONAL SOFTWARE

*Our educational software is used in thousands of schools and homes
throughout Great Britain.*

EDUCATIONAL 1

BBC/ELECTRON

£6.95 £8.95
Tape £8.00 Disc £10.00

Hours of fun and learning for children aged five to nine years. Animated graphics will encourage
children to enjoy counting, maths, spelling and telling the time. The tape includes six programs:
MATH 1, MATH 2, CUBECOUNT, SHAPES, SPELL and CLOCK.

... 'An excellent mixture of games' ... Personal Software - Autumn 1983.

EDUCATIONAL 2

BBC/ELECTRON

£6.95 £8.95
Tape £8.00 Disc £10.00

Although similar to Educational 1 this tape is more advanced and aimed at seven to twelve year
olds. The tape includes MATH 1, MATH 2, AREA, MEMORY, CUBECOUNT and SPELL.

FUN WITH NUMBERS

BBC/ELECTRON

£6.95 £8.95
Tape £8.00 Disc £10.00

These programs will teach and test basic counting, addition and subtraction skills for four to seven
year olds. The tape includes COUNTING, ADDING, SUBTRACTION and an arcade type game called
ROCKET MATHS which will exercise addition and subtraction. With sound and visual effects.

... 'These are excellent programs which teachers on the project have no hesitation in
recommending to other teachers.' ... Computers in the Classroom Project, Riley High School.

FUN WITH WORDS

BBC/ELECTRON

£6.95 £8.95
Tape £8.00 Disc £10.00

Start your fun with alphabet puzzle, continue your play with VOWELS, learn the difference between
THERE and THEIR, have games with SUFFIXES and reward yourself with a game of HANGMAN.

... 'Very good indeed' ... A&B Computing - Jan/Feb 1984

JIGSAW AND SLIDING PUZZLES

by P. Warner BBC/ELECTRON

£6.95 £8.95
Tape £8.00 Disc £10.00

There are two jigsaw and four sliding puzzles on a 3 x 3 and 4 x 4 grid. Each program starts off
at an easy level to ensure initial success but gradually becomes harder. It helps children to develop
spatial imagination and in solving problems. The tape includes: OBLONG, JIGSAW, HOUSE,
NUMBERS, CLOWN and LETTERS.

KON-TIKI

BBC

£11.95
Disc £12.95

Simulation program based on Thor Heyerdahl's KON-TIKI expedition. Enjoy a journey on the KON-
TIKI recording on a map the raft's position and entering notes in the logbook on creatures found,
unusual events etc. Inclusive of booklet, background information, maps and fully supportive
illustrated data sheets.

... 'A well thought-out package with a wide appeal' ... Which Micro & Software Review -
October 1984.

★★SPECIAL OFFER★★

Buy three titles and deduct £4.00

Add 50p p&p per order. Please state BBC or ELECTRON or
40 or 80 track 5 1/4" for discs.

Golem Ltd, Dept A, 77 Qualitas, Bracknell, Berks RG12 4QG. Tel: 0344 50720

EDUCATION

all demand a very high cost in both labour and components.

It is important to choose the right devices first time round as mistakes are expensive. To begin with printers, you may find some printers that perform marvellous feats offered at low prices. Ensure that they are not only compatible with your computer, an obvious consideration, but also with your software – not so obvious. If, for example, *Pagemaker* from AMX will not drive the printer you intend to buy then it is likely that other programs will not work.


Generally speaking, a good guide is if your intended printer is mentioned in handbooks for your software in terms of printer drivers or compatibility. The magic phrase Epson-compatible is also a guideline. If a machine is described as such then it is following an unofficial standard which has been adopted by the majority of the industry. Thus, the Canon PW-1080A, the Taxan Kaga and the Mannesman Tally have all been described as compatible with the Epson standard. Your child will need a printer that can cope with not only the standard type as output from a word-processor but can also deal with bit-image printing in order to effect screen dumps and print the multitude of fonts that are now available from companies, mostly it seems, Clares Micro Supplies (*Fontaid, Fleet Street Editor, Artroom*).

Similarly with disc drives, don't necessarily buy the cheapest available. If your dealer tells you that it is a Mitsubishi clone then it isn't a Mitsubishi. Look for names and demand a commitment to service the machine. Your child will probably give the drive a good deal of wear. If you own a Master, then be especially certain that any drive that you buy can cope with the more rapid step rates that the 1770 disc chip can generate. Many more programs now operate with frequent disc access either to load in new material or to save information that has been generated during the running of the program.

With the advent of the Advanced Disc Filing System (ADFS) and the consequent ability to format both sides of the disc to act as one continuous surface, you are well advised to consider a double-sided 40/80 track switchable drive. This will then give you ample flexibility to perform all you need to do. If you really want to go wild buy a dual drive as well. At present, perfectly respectable 40/80 drives that are double sided can be brought for under £100 – quite a bargain.

One of the most liberating devices that

you can buy for your own and your child's use is a mouse. If you have not already experienced using one of these little creatures then I strongly advise that you seek out one and have a try. Apart from being a novelty in many ways, these simple pointer-movers enable you to interact with the computer without having to do vast

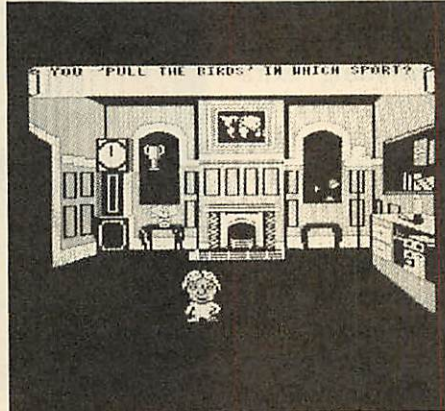

Trivial Pursuit, now available on micro

quantities of keyboard entry. Operations that normally require the typing in of a series of commands are simply performed by moving the pointer to the relevant spot on the screen and pressing a button.

Mice come in all shapes and sizes, the leader for the BBC machine is probably the AMX Mouse which has gone through several permutations.

There was originally a little criticism about this mouse which operates via a metal ball in its underside. This ball occasionally tended to slip and was fussy about the surface it ran on. However, since then a new version has emerged with a rubber ball that is altogether more positive and even in its movement.

Another early contender in the mouse race was Wigmore Megamouse, also marketed via Peartree Computers. This elegant mouse is made in a matching plastic to that of the BBC Micro case and has small buttons carefully placed to ensure maximum comfort in use. It has a rubber ball and is very smooth performer. Then there is a latecomer to the field – the Digimouse from Nidd Valley Computer Products. This mouse has stormed into the arena with a low price, good performance and a very chunky feel to it. It and the Megamouse were the first ones to be made compatible with the new Master Compact and both of course were tied in with art packages – *Artroom* from Clares and *Artist* from Peartree.

In the mouse stakes the choice is difficult as they all offer a similar product of fairly consistent quality. It's up to the purchaser

to see which offers the best deal financially.

The blandishments of a whole host of computer manufacturers will assure you that their product is the most advanced and that the competition is all three years behind. As is usual in advertising, the important things are those which are not said and a few of them are to be examined in this article.

Which micro?

In your computing philosophy for you and your children you must decide whether the machine you want should be able to display sensational graphics, play beautiful music, operate more quickly than other comparable machines. The Amiga, the Atari and the Amstrad all have facilities which are fascinating and astounding. Unfortunately they tend to be like any hybrid – good at one or two things and average or below at the rest.

If you are looking for a home publishing system then you will probably buy the Apple Macintosh, but if you want a machine that can do most things very well and some superbly then you will be hard pressed to do better than buying the BBC Master Series.

Despite all the criticisms, the Master has more going for it in terms of quality software and peripheral devices that are of use to you and your child than any other machine. All of those facilities are open to you as a computer user with any of the various versions of the Master. If you have no desire to progress beyond the basic computer itself then the Compact is probably your best buy. For once, Acorn has listened to the needs of the marketplace. It is a company that has survived ordeal by fire and they had to think hard and get it right. The consumer will benefit in the long term from the reliability of this series, the compatibility of its software and the durability of its technology in an age where things run out of date with amazing speed.

Hopefully the comments on these pages will help you make some choices for Christmas. Those who have thought out their reasons for using a computer are more likely to gain the maximum benefit from their machines and, incidentally, are also likely to make the choice of a machine that will suit their needs in the first place.

Superior Software, (0532) 459453; *Domark Ltd*, 01-947 5624; *AMX*, (0925) 413501; *Clares Micro Supplies*, (0600) 48511; *Wigmore House*, 01-734 8826; *Peartree Computers*, (0480) 50595; *Nidd Valley Micro Products*, (0423) 864488.

ALL NEW FROM LOGOTRON



REVISED LOGOTRON LOGO

£60.00

Better than ever - with revised manual and LOGO Extension Disk included. Chosen as the standard LOGO for the BBC Master Compact.

REVISED LOGO EXTENSION DISK

£15.00

This contains a number of specialist modules offering yet more facilities to the LOGO user - including extra commands for Turtle Graphics, File handling, Databasing, List Processing, new printer utilities and serial turtle drivers.

NEW CONTROL LOGO

£15.00

This new version lets you talk to all the ports on BBC computers. With Control LOGO it is simple to create your own procedures for controlling buggies, robots and models. Because it works with a full computer language Control LOGO offers much more power and flexibility than stand alone control programs.

NEW MUSIC LOGO

£15.00

The latest addition to the range of Logotron LOGO extensions, Music LOGO provides over 30 new commands to let you compose and play your own computer generated music. Forget 'Sound' and 'Envelope', Music LOGO uses standard musical terms to set chords, pitch, tempo, voices and instruments.

PENDOWN

£39.00 (Schools £34.00)

PenDown is the new word processor designed for children. It combines power and ease of use with features including WYSIWYG text formatting, pull down menus, story planner, Font editor, user definable dictionaries and Help screens.

NEW ADVENTURE WRITER

£15.00

An extension to PenDown, this unique tool combines word processing with simple programming commands to provide a complete environment for creative writing. Structure a story in the PenDown Planner, write it in PenDown's full featured word processor and the Adventure Generator will combine your text and your instructions to create an interactive game for someone else to play.

NEW ROBOTARM SYSTEM

£89.00

An affordable, ready made robot arm, this system includes the Spectravideo 5 axis RobotArm, BBC interface, Guide book, Control LOGO and Control BASIC. Educational and recreational, the Logotron RobotArm system represents outstanding value for money.

For FULL CATALOGUE call or write to:

Logotron Ltd
Dales Brewery, Gwydir Street
Cambridge CB1 2LJ
(0223) 323656



Klick

The flexible computer benching system



The Klick flexible benching system has been designed for constructing free standing benching which can be assembled quickly and easily. The Standard range is available in 3 heights and can be supplied with a selection of underbench storage units. The Flexi range provides the scope for any unusual size, height or configuration required. For product brochure and price list please contact:

Store Stock Systems Ltd, Claverton Road, off Floats Road, Wythenshawe, Manchester M23 9NE Telephone 061-998 9726

EDUCATION SOFTWARE THE LEARN EASY RANGE

from

PTARMIGAN SOFTWARE

MATHS 1

AGE 5 - 12 YEARS

Addition 1. 4 levels / 2 options per level.

Subtraction 1. 4 levels / 2 options per level.

Shapes: 2 options. Random test and alpha order.

Times tables 1. 4 levels / 2 options per level.

Times tables 2. 4 levels / 2 options per level.

BBC,B

DISK £9.95 / TAPE £6.95

ELECTRON

TAPE £6.95

MATHS 2 ADVANCED PROGRAMS

AGE 9 UPWARDS

Addition 2. Levels as above

Subtraction 2. Levels as above

Multiplication 1. Levels as above

Division 1. Levels as above

Number signs 4 levels / 2 options per level.

BBC,B

DISK £9.95 / TAPE £6.95

ELECTRON

TAPE £6.95

These programs have been designed with the aid of teachers and have been tested in Essex schools and homes. Each idea has been researched and as a result the programs actually teach and correct with full on screen explanations. Each suite of programs has been designed as a stand alone teaching aid.

All prices inclusive of p&p

* EQUAL ADDITION OR DECOMPOSITION METHODS *

* Please state requirement with order.

BBC,B or ELECTRON. State 40 or 80 track for disks.

OPEN 7 DAYS

PTARMIGAN SOFTWARE, 5 ANSON CHASE,
SHOEBURYNESSE, ESSEX, SS3 9RW. TEL 03708-2429

EDUCATION

THE NETWORK PAGE

Translating *Edword* to *View* and *Wordwise*, working with assembler and OSWORD calls

Robin Newman

First a thank you to all readers who have written to the Network Page since its first appearance in June. Your feedback is very useful in determining its future. The pages are intended to cover any network for BBC machines however, the majority of the comments I've received have been for Acorn's Econet system.

A letter from distant parts came from John De Figueiredo in Victoria, Australia, who uses *Edword* with good results on his level three network. John has written translator programs from *Edword* files to *View* and *Wordwise*. He has found some of the Digital Services' utilities useful, particularly *Dumps*, which allows screen dumps to the network printer even for NFS3.34, and *Fastfile*. *Fastfile* is part of a suite of network utilities sold for £75 plus VAT, which allows fast BPUT and BGET file handling as discussed in the network article in the June 1986 issue.

Digital Services supplied a set of its utilities following that article, and there are some very useful programs contained in the suite. *Fastfile* works very well, although it only works for one open file, and I found that there were problems if you tried to open a second file while *Fastfile* was active. John has found that *ViewStore* becomes usable on the network with *Fastfile*.

The Digital Services suite contains a wide variety of other utilities from Build, List and Type (similar to the disc filing system utilities) to utilities to log on or off selected machines remotely, force machines to run the same program, and one to send command strings to selected machines. Another useful one is Syscopy, which enables you to copy files between directories and to different filing systems. Programs and documentation are written to a high standard, although the package is not cheap when compared to some of the other products on the market.

One of the problems with buying utilities is that most packages contain variations on a standard spread of programs. You may like company A's Force program but prefer B's Build, Dump and List. It be-



Econet in action, the Redwood Publishing production desk

comes expensive if you buy everything from everybody! To alleviate the problem, XOB is introducing a buy-your-own-mix policy. Utilities will be individually priced and you can select those you want, with prices ranging from 50p to a few pounds. You will still be able to purchase the standard packages.

There are too many details to reproduce here, so if you are interested write to XOB, Balkeerie, Eassie, by Forfar, Angus DD8 1SR. Tel: (0307) 84364. Digital Services can be reached on (0705) 324934 or 159 Havant Road, Drayton, Portsmouth PO6 2AA. Who knows, perhaps Digital Services can also be persuaded to adopt the mix 'n' match approach!

Fiona Jamieson of Edinburgh brings us to our next topic. She would like to see some space dedicated to working with Econet calls from assembler. This is not for the faint-hearted, and I think that it would be better first to see how Econet calls can be made from Basic. Fiona starts off by submitting a Basic program which is akin to *NOTIFY, but which enables you to send commands from one station to another as well.

Her program (which I have modified slightly) is well-structured, and an ideal example for exploring how to write network utility programs. All communication with the built-in network primitives con-


tained in the network filing system ROM is by means of five OSWORD calls (numbers &10 to &14) and four OSBYTE calls (numbers &32 to &35). All of the OSWORD calls are multi-purpose, their exact function being determined by parameters associated with the call.

Fiona's program (listing 1) makes use of OSWORD &14. Although this call is specific to the network, its operation is similar to that of any other OSWORD call you may have used already eg, OSWORD &7F to read disc filing system disc sectors. All such calls rely on a parameter block. This is nothing more than a designated section of memory holding relevant information which is used by the OSWORD call.

In this example the block is set to &A00 in PROCvars. PROCsetup then inserts the relevant information into the block, using the '?' operator. This is equivalent to the Poke command in other Basic languages.

The Notify function is selected by placing a one in the first location in the parameter block. The next two locations hold the number of the station to be notified, the first location normally being zero (unless you wish to notify a station on a separate bridged network).

The second is the station number between one and 253. The following bytes contain a character string which is the command to be sent to the notified station.

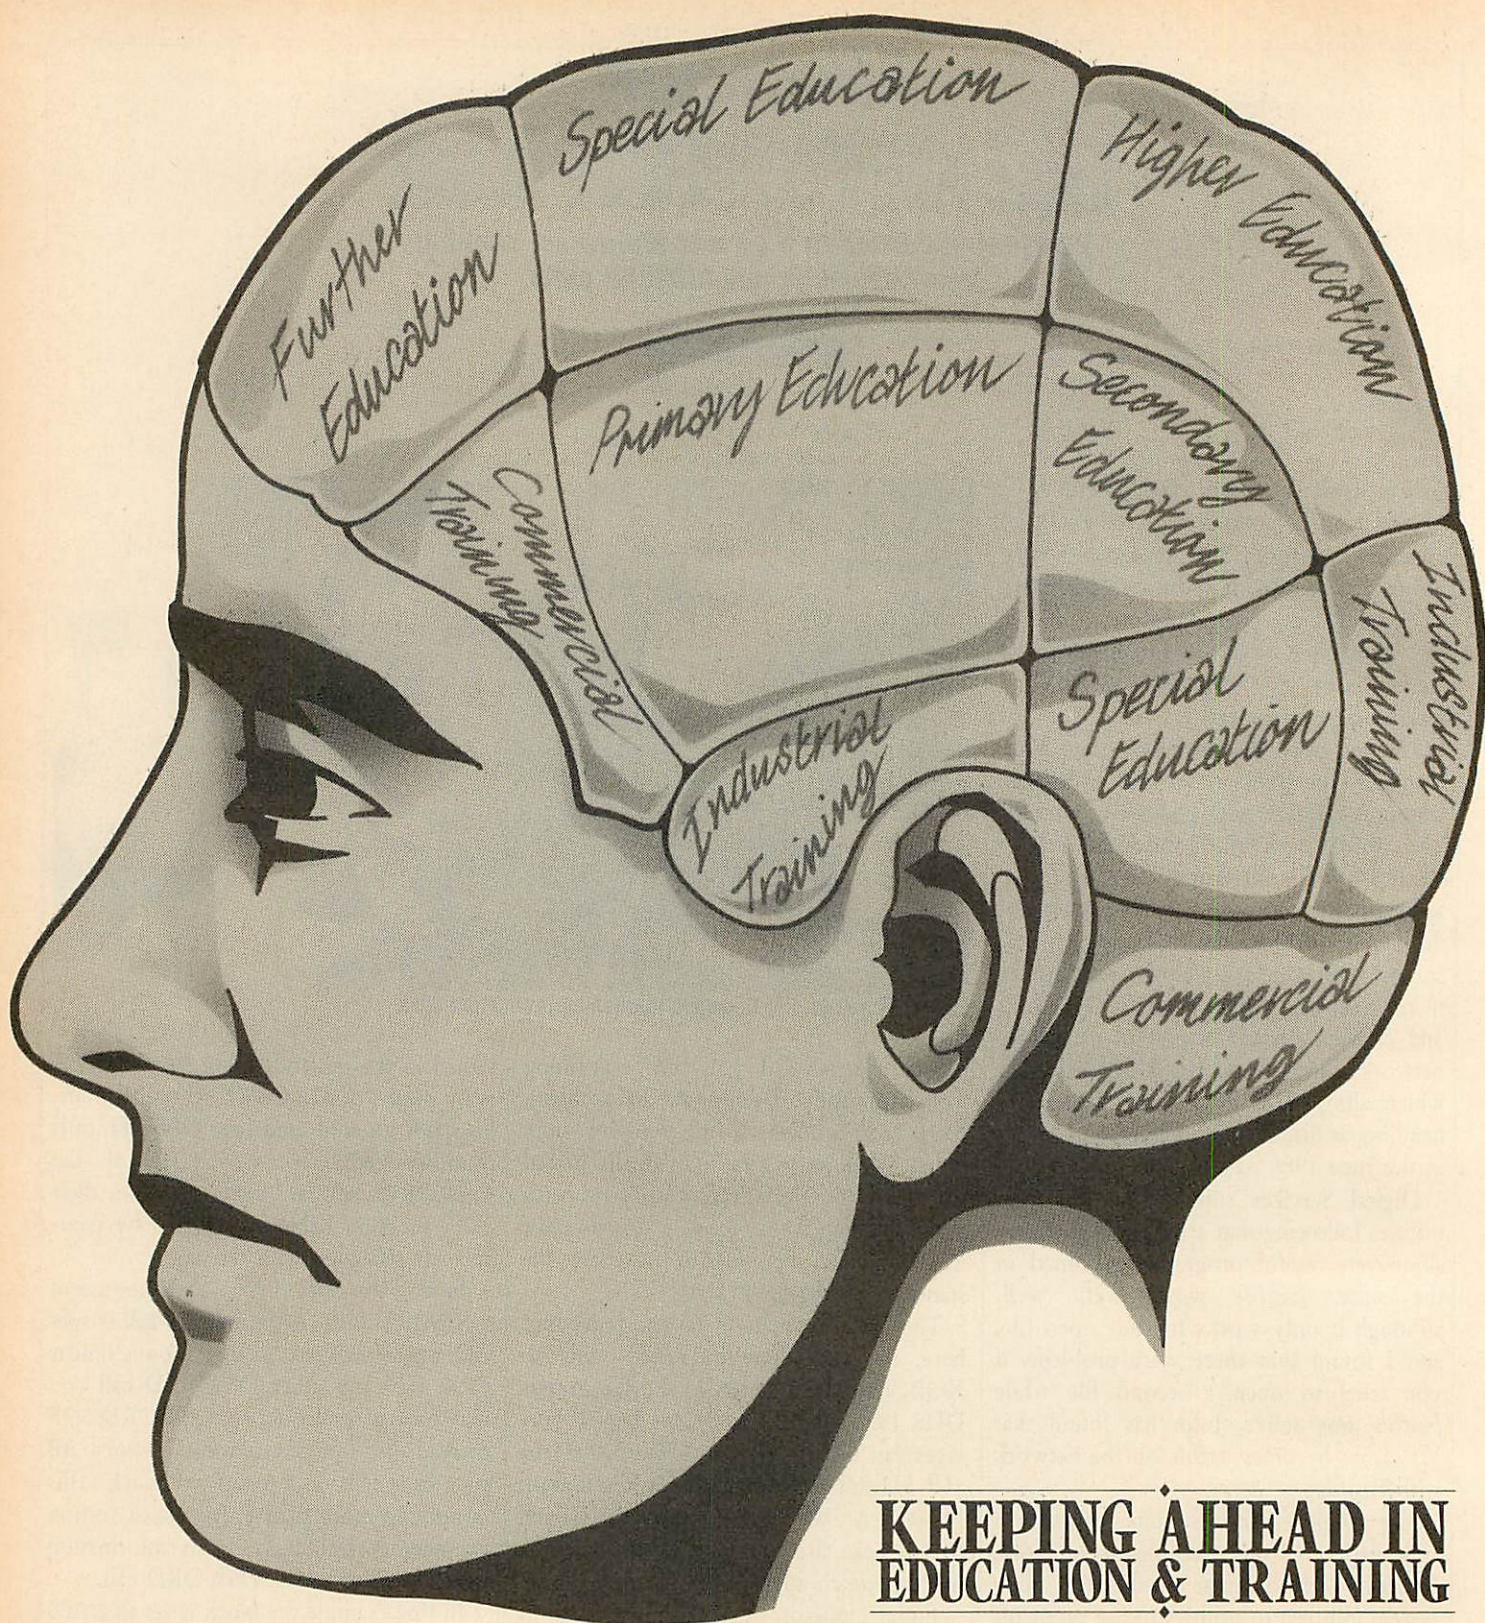

KEEPING AHEAD IN EDUCATION & TRAINING

THE THIRD
HIGH TECHNOLOGY
AND
EQUIPMENT
IN
EDUCATION

Exhibition
87

January 21st-24th 1987
BARBICAN, LONDON

In the Acorn utility *NOTIFY, the message sent is not terminated with Return, meaning that the utility is not useful for sending commands to another station. This happens because the command string is terminated with the code zero. However, by terminating the string with the code 13, which represents the Return key, it is possible to send a command to the speci-

Address XY	
Byte	Value
0	1
1	station number low (usually 0)
2	station number high (1 to 253)
3	string to be sent to station, eg *
4	string to be sent to station, eg B
5	string to be sent to station, eg Y
6	string to be sent to station, eg E
.	.
.	.
n	terminating character 0 or 13

Table 1. Station notification parameter block

fied machine. Table 1 illustrates the parameter block.

Lines 290, 300 and 470 in the program allow either option. The last of these lines is perhaps not too clear. If the expression (R\$="Y") is true, which is represented by -1 in the BBC machine, then $-13 * -1$ gives 13; if it is false (represented by 0) then we get $-13 * 0 = 0$.

Fiona does not use the alternative format for the indirection operator '?'. Thus, $?(block\% + 1)$ is more concisely written as $block\%?1$, and $?(block\% + 2)$ as $block\%?2$. However beware: $$(block\% + 3)$ cannot be written as $$block\%?3$. This alternative format is widely used, and is worth getting to grips with.

Having set up the parameter block, the OSWORD call is initiated in the same manner as any other OSWORD call. The variables X% and Y% are set to point to the start of the parameter block. Since this is at &0A00, X% is set to zero, the low byte of the address, and Y% to &0A the high byte. A% is set to the OSWORD call number &14 and then the machine code entry address &FFF1 is called.

One other procedure of interest is PROC-checknet. This uses the call OSARGS, to check the current filing system. When this is called with A%=0 and Y%=0 then it returns a number in the accumulator dependent upon the filing system. The number is five for the NFS. The technique of using the USR function to extract this information is an important one which is widely used when

writing network utility programs in Basic. Details of its use were given in the October 1986 Network Page.

This simple program can, of course, be expanded. For instance, it could be modified to send the same string in turn to a series of stations automatically. It has some shortcomings: for instance it will 'hang' if the destination station is protected, or not switched on, but such problems can be overcome by using additional network calls which can check whether the station is there or not, and whether it is protected, *before* sending the command. However, we will have to wait for another issue to see how that can be done.

The main use of OSWORD &14 is to communicate directly with the fileserver. It is the call used to obtain information such as the date and time, the name of the current disc and directory, or a list of stations logged on. The final listing this month (listing 2) is a

Address XY		Byte	Value
Tx header start	2	0	0
		1	size of block
Tx header end	3	0	0; set to reply port number automatically
		1	function code
		2	0; set up automatically to your URD channel
		3	0; set up automatically to your CSD channel
		4	0; set up automatically to your CSL channel
		5	rest of block depends upon function code
		6	

Table 2. Fileserver calling program format

program called FSTESTBED, which I developed to experiment with these fileserver calls. The program first reserves space for the parameter block, which in this case also doubles as the data area to which information is returned from the fileserver. Thus for some calls it needs to be quite large, and in this multi-purpose program &70 bytes are reserved. These are initially all set to zero in line 90, and then the user is prompted for the

information to be placed in the parameter block in lines 100 to 210. The general format for the block is shown in table 2.

In this case the first byte is zero, signifying that the call is to the fileserver. The block can vary in size depending upon the command required, which is set by the function code in byte three, and the size of the block is contained in byte one. The minimum is

Address XY		Byte	Value
Rx header start	2	0	0
		1	size of block
Rx header end	3	2	command code
		3	return code
		4	rest of fileserver receive block

Table 3. Reply format from the fileserver

seven, but it will often be longer. In practice I find that it doesn't matter if you overestimate here, but you mustn't make it too short. Bytes two to six constitute what is known as a standard transmit header. Most of the values here are automatically filled in for you by the NFS ROM, and the one you need worry about is byte three which contains the function code which tells the fileserver what to do. A list of the function codes is contained in the Network Advanced User Guide, pages 65 to 70, although with not enough detail to use them all.

There are up to four different parameters which may be needed in the block depending upon the function code. PROCdecode enables the program to handle either null, numeric or string parameters as appropriate. When prompted for the next byte, if there are no more parameters to be supplied, merely hit Return. Once the block has been set up, its contents are displayed on the screen, and, all being well, the reply from the fileserver is displayed below (table 3).

The command code is zero if the operation is complete and successful. If the code is not zero then the operation would normally continue with further messages.

The return code is zero if no errors occurred. If not zero, the value is an error number, and it is followed by a text string describing the error eg, Bad Command.


So much for the theory. Table 4 contains

Command	Function code	block size	byte 7	byte 8	byte 9	byte 10
Read disc name	14	10	0	1	Ret	Ret
Read user names	15	10	1	4	Ret	Ret
Read date and time	16	10	Ret	Ret	Ret	Ret
Read FS version	25	10	Ret	Ret	Ret	Ret
Read free space	26	20	*	Ret	Ret	Ret

* type in the name of your fileserver disc here, eg, DISC1 followed by Return.

Table 4. FSTESTBED examples

COLOUR MONITORS HIGH RESOLUTION

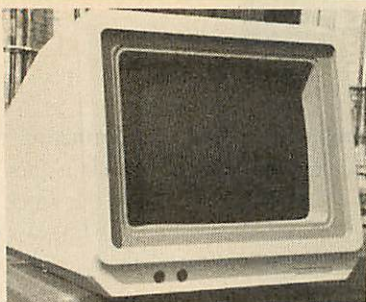

0.31 dot matrix

Specially designed to show
"B" and MASTER at their
very best.

Order from manufacturer,
only **£299.00 plus VAT.**

**Chromagraphics,
135, Cliff Road,
Hornsea, N. Humberside.
HU18 1JB.**

Tel: 04012 4699.

CONTROL IT



The **Control It** pack, containing buffer box, switches and leads enables you to carry out experiments in computer control.

The **buffer box** protects the computer against accidental damage, gives access via 4mm sockets to the computer user port, provides a power supply.

In addition to the eight input and eight single power output sockets the buffer box has four pairs of motor control sockets. Four motors can be simultaneously controlled. Stop-start, forward/reverse. 4 red, 2 yellow and 2 green LEDs indicate the output line.

Versions available: BBC Model B, RML 380Z and 480Z, Spectrum (additional interface required).

Power supply - Stabilized, fully protected up to a maximum of 1.5A. Dual voltage nominally 4.5V and 10.5V catering for most small d.c. motors.

The **buffer box** is attractively packaged in an epoxy coated steel case.

Contents of the pack: Buffer box, push switch, proximity switch, tilt switch, light switch, pressure pad switch, 8 short switch leads, 4 long motor leads.

Switches are available in two forms:

Small - where the leads fitted with 4mm plugs are attached directly to the switch.

Large - where the switch is encapsulated in a plastic housing containing 4mm sockets. Separate leads are provided.

A version with 2.5mm and 3.5mm jack plugs will shortly be available.

This product is CLEAPSE Safety Approved

EDUCATION PRICE

Control It Pack (large switches)	£99.00 + VAT
Control It Pack (small switches)	£95.00 + VAT

DELTRONICS 91 Heol-y-Parc, Cefneithin, Llanelli,
Dyfed, SA14 7DL
Telephone: 0269-843728

Have a word with your micro for just **£149** * + VAT

Microcomputer Voice Control at a Sensible Price

R&D Speech Technology's MICRO-VOICE is the definitive speech input/output device for your BBC microcomputer. For just £149 plus VAT, it delivers full vocal control of your system, freeing processor time, and saving you the bother of typing in commands.

The Micro-Voice

- Understands up to ten words or phrases at any one time.
- Listens in any language.
- Is simple to install and simple to operate.
- Can be quickly and easily incorporated into any program.
- Comes with detailed operating instructions and training.
- Is totally reliable and achieves up to 95% accuracy.

*Includes microphone and stand.

System in photograph includes optional headset for £25.00 (+VAT)



**To: R & D Speech Technology
Waterside House
Ponsharden, Penryn
Cornwall, TR10 8AR
Tel: Falmouth (0326) 75290**

Tick the Boxes for the Items Required

☐ Please supply MICRO-VOICE(S) at £176.35 (inc. VAT and P&P)

☐ Please supply BBC Model B 3-way 1MHz. bus connectors at £17.99

Name

Address

Post Code

EDUCATION

some examples to try out with the program.

The date and time and free space functions return data in a coded form. For the date and time five bytes are returned. The first byte contains the day, the second the year minus 1981 (top four bits) and the month number (bottom four bits). There follow three bytes – one each for hours, minutes and seconds.

For example, 21/4/86 is encoded &15 (21 in hex), &54 (1986-1981=5, month is 4).

The free space function returns two three-byte values. The first three give the free space as a three-byte hex number, in 'units' of &100, and the second three bytes give the total disc space. You should be able to work out examples with reference to the

Network Advanced User Guide.

Please keep your letters coming. You can influence what is in the network page by making your views known. In the meantime, if you want to write to network utilities, have a look at Acorn's Advanced User Guide for Econet, or get hold of Chris Dawkins' book the *Econet Micro Guide* (Longman).

```

10 REM Network Notify
20 REM by Fiona Jamieson
30 REM for BBC B/B+/M/C
40 REM connected to an Econet
50 REM (c) Acorn User December 1986
60 :
70 MODE 7
80 PROCvars
90 PROCinput
100 PROCchecknet
110 PROCcheck
120 PROCsetup
130 PROCsend
140 END
150 :
160 DEF PROCvars
170 send$="":stattsosend=0
180 osword=&FFF1:osargs=&FFDA
190 block%=&A00
200 check%=2:REM Fileserver number
210 ENDPROC
220 :
230 REM Input data
240 :
250 DEF PROCinput
260 INPUT"Station to notify : "stattsos
end
270 INPUTLINE"String to send : "send$
280 PRINT"Send <Return> Y/N : ";
290 REPEAT:r$=CHR$(GET AND &DF)
300 UNTIL r$="Y" OR r$="N"
310 PRINT r$:ENDPROC
320 :
330 REM Writing to fileserver?
340 :
350 DEF PROCcheck
360 IF statssosend=check% VDU 7:PRINT""
Writing to fileserver is forbidden":PROC
bye:END

```

```

370 ENDPROC
380 :
390 REM Set up block for Osword call
400 :
410 DEF PROCsetup
420 ?block%=1
430 ?(block%+1)=stattsosend AND &FF
440 ?(block%+2)=stattsosend DIV &100
450 $(block%+3)=send$
460 length%=LEN(send$)+3
470 ?(block%+length%)=-13*(r$="Y")
480 ENDPROC
490 :
500 REM Check if an Econet station
510 :
520 DEF PROCchecknet
530 A%=0:Y%=0
540 checknet%=USR(osargs) AND &FF
550 IF checknet%<>5 VDU 7:PRINT"Not an
Econet station.":END
560 ENDPROC
570 :
580 REM Send block to station
590 :
600 DEF PROCsend
610 A%=&14
620 X%=block% AND &FF
630 Y%=block% DIV &100
640 CALL osword
650 PRINT""String sent to station ";st
atssosend
660 ENDPROC
670 :
680 REM Log off
690 :
700 DEF PROCbye
710 *BYE
720 ENDPROC

```

```

10 REM Fileserver interface test bed
20 REM by Robin Newman
30 REM for BBC B/B+/M/C with Net
40 REM (c) Acorn User December 1986
50 :
60 DIM O$wCB% &70
70 X%=O$wCB%:Y%=X% DIV 256
80 A%=&14
90 FOR Z%=0 TO &6F:O$wCB%?Z%=0:NEXT
100 INPUT"Function code number "code%
110 INPUT"Size of block "S$
120 IF S$="" sz%=8 ELSE sz%=EVAL(S$)
130 :
140 INPUT"Byte 7 "seven$
150 PROCdecode(7,seven$)
160 INPUT"Byte 8 "eight$
170 PROCdecode(8,eight$)
180 INPUT"Byte 9 "nine$
190 PROCdecode(9,nine$)
200 INPUT"Byte 10 "ten$
210 PROCdecode(10,ten$)
220 :
230 O$wCB%?1=sz%:O$wCB%?3=code%
240 at%=@%:@%=4
250 FOR Z%=0 TO sz%+1
260 PRINT ~O$wCB%?Z%;

```

```

270 NEXT
280 PRINT
290 FOR Z%=0 TO sz%+1
300 IF O$wCB%?Z%>31 AND O$wCB%?Z%<127
PRINT CHR$(O$wCB%?Z%); ELSE PRINT".";
310 NEXT
320 CALL&FFF1
330 PRINT""Result is:-"
340 FOR Z%=0 TO &6F
350 PRINT ~O$wCB%?Z%;
360 NEXT
370 PRINT
380 FOR Z%=0 TO &6F
390 IF O$wCB%?Z%>31 AND O$wCB%?Z%<127
PRINT CHR$(O$wCB%?Z%); ELSE PRINT".";
400 NEXT
410 PRINT':@%=at%
420 END
430 :
440 DEF PROCdecode(N%,A$)
450 IF A$="" ENDPROC
460 IF VAL(A$)<>0 OR A$="0" O$wCB%?N%=
VAL(A%):ENDPROC
470 $(O$wCB%+N%)=A$
480 O$wCB%?(N%+LEN(A$))=13
490 ENDPROC

```

Listing 1. Makes use of OSWORD &14 for Econet and listing 2, the fileserver interface test bed

DT1 MODEM VERSION AVAILABLE **Compact COMPATIBLE**

CommuniTel

Available soon...
For existing users, an ADFS version and a set of utilities to support your database.

CommuniTel is an exciting professional viewdata system for the BBC Micro.

A joy to use and a boon to schools, the system comprises a comprehensive suite of programs which enables the creation of on-line (and off-line) databases and has direct electronic mail facilities.

Now, any user can create their own viewdatabases and tele-software, and explore the world of electronic publishing and information services.

The system already supplied to:

- The Prestel Education Service
- The UK DoI ITEC Programme
- The Radio Society of Great Britain
- Advisory Unit for Computer Based Education, Hatfield
- Educational Computing magazine
- Microelectronics Education Programme
- All secondary schools in Nottinghamshire

Prices: Level 1 + £55 Level II £375 (Inc. Modem)
Educational discounts available

For further information and a demonstration contact:
 CommuniTel Ltd 189 Freston Road London W10 6TH
 Telephone: 01-960 7998

.... reflect on it

CommuniTel

CHALKSOFT * GARLAND * STORM * CAMBRIDGE * H&H * GOLEM

Looking for the RIGHT Software?
 You need the newly published 72 page
EDUCATIONAL SOFTWARE DIRECTORY

- * Widest selection of programs – over 1000 for the BBC and other computers
- * Full program descriptions with screen shots
- * Easy ordering and competitive prices

Write or phone for your free copy today
Rickitt Educational Media
 Ilton • Ilminster • Somerset TA19 9HS • (04605) 5152

AKADIMIAS * FERNLEAF * BOURNE * SCISOFT * JACARANDA * SUIIS

FRENCH/GERMAN/SPANISH/ITALIAN

For BBC, B+, Master and Compact
Learn languages with games – Fun revision aids!

Vocabulary:
 Le Vocab – French Das Vokabular – German
 Il Vocabulario – Italian El Vocabolario – Spanish
 — 5,000 word vocabulary – subject based —
£19.99

Verbs:
 La Conjugaison (regular or irregular) – French
 La Conjugacion (regular) – Spanish
 — up to 30 verbs, up to 17 tenses —
£9.99

Please send cheque/P.O. and state 3½" or 5¼" (All prices include VAT + P&P)

Medstat Ltd City House, Maid Marian Way, Nottingham NG1 6BH.
 Tel: (0602) 411120

ACCESS ORDERS WELCOME

AL SOFT-TEACH EDUCATIONAL SOFT-TEACH EDUCATIONAL SO

"High degree of pupil involvement" ... "for home and class" ... "most attractive package for a long time".
Acorn User
 "The quality of the graphics is excellent" ... "good value for money".

Teaching Geography

GENERAL MAP READING — £23 inc. VAT
COASTAL MAP READING — £23 inc. VAT
 (BBC B disc only)

Soft-Teach Educational.
 Orders or Details from:
 Soft-Teach Educational, Sturgess, Longbridge Deverill, Warminster, Wilts BA12 7EA.

DUATIONAL SOFT-TEACH EDUCATIONAL SOFT-TEACH

VERSATILE CAD/CAM

For the BBC Micro

A sophisticated, menu driven, user friendly CAD/CAM package with many facilities for very accurate drawing construction and data extraction for Numeric Control (NC) post processing.

CAD System (EDUCAD) – £80 (ex. vat)

- * geometric/schematic drawings
- * zoom, scale and units control
- * text/symbols, any size and angle
- * mirror and duplicate
- * generalised x-y plotter output
- * area properties

CAM System (EDUCNC) – £35 (ex. vat)

- * part geometry from EDUCAD
- * tool path animation

- * construction/modification
- * text/symbol font editor
- * intersects and tangents
- * rubber banding
- * graphics screen dump
- * revision/material info. editor
- * part profile definition
- * generalised NC post processor

Both packages have explicit input prompts and error messages. This together with over 80 pages of online HELP data makes these systems easy to use and easy to learn – an ideal way of introducing this new technology.

TO ORDER simply specify disk format requirements or to obtain further details contact:
EDUSOFT, 15 Tamworth Business Centre, Amber Close, Amington, Tamworth, Staffs B77 4DS
 AA270

ECONET ENHANCEMENT SOFTWARE FROM DSL

ECONET UTILITIES
 A suite of machine-code programs which vastly increases the power and flexibility of any Econet System.
 Ideal for Education, the package provides such features as:

FORCE	LOGON	LIST	CONT
SEND	LOGOFF	TYPE	FILEINFO
SENDALL	DISC-NET COPY	DUMP	COMPARE
SHOUT	INTERDIRECTORY	BUILD	TIME
DATE	COPY	HALT	

It even speeds up network-access by a factor of up to 64 times. £75.00 + VAT

DUMPS
 This package allows full graphics screen-dumps to be performed down the network.
 Only one screen-dump ROM, (such as Printmaster), is required on the network and this is allocated as the DumpPS station. All other stations will then be able to send graphics down the network to this.
 The DumpPS station may also be the normal Econet Printer-Server, but the program will work equally well on an ordinary network station.

£49.00 + VAT

We also offer attractive educational discount on **ECONET HARDWARE**

digital services
Digital Services Ltd.
 159 Havant Road, Drayton, Portsmouth, Hampshire.
 Telephone (0705) 324934

ACORN FORUM

This month Mike Barwise gets his teeth into mode 6 stripes, locating faulty RAMs, an Atom program emulator and as Electron print style selector

£5 KILL THAT MODE SIX TIGER

A really neat tip here from Cad Delworth of Edinburgh. He was using mode 6 with a coloured background and user-defined characters, and got fed up with the stripes between the text lines. Cad found out that:

VDU 23,0,9,7,0;0;0;
removes the stripes and gives you a clean image on screen.

The mechanism here is that in mode 6, characters are programmed to a height of eight scan lines including a couple of permanently blank ones (which you can't write to). Cad's VDU call readjusts this to only the six active lines, thus eliminating the stripes. Cad points out (correctly) that the resulting screen will roll, due to the total frame time no longer matching the standard 50Hz frame rate. His solution is a second VDU call:

VDU 23,0,5,8,0;0;0;
which in fact trims the 'horizontal total' register frame.

Nice one, squirrel. Your reward is a portrait of Wellington (not the same as getting the boot!).

LOCATING FAULTY RAM

Stefan Dahlin came from Gothenburg in Sweden to see us at the Acorn User Show, where he mentioned a problem with the RAM on his issue seven BBC. It sounded like a RAM fault to me, so I suggested he try reading and writing known data to this page to prove it.

Stefan wrote to me recently to confirm my diagnosis, but he has a new problem, the RAM is faulty, but which of the chips need replacing?

Good point, Stefan, and here is your answer. The Beeb uses 4516 or 4816 16k RAM chips. As each byte contains eight bits, there are eight chips associated with each 16k block of memory. This means that there are two sets of eight chips in the 32k micro: the first set covers addresses from &0000 to &3FFF, and the second from &4000 to &7FFF. The first block (in bit significance order: bit 0 to bit 7) is

located at IC61 through IC86, and the second block at IC53 through IC60.

As there are eight chips per byte, it is important to find out which chip is the bad one, or you will have to replace them all, which is wasteful. Write a little routine which stores a sequence of bit changes at each location, and reads it back each time. The routine should print out any attempts where the written data and the read back data do not match. You could, of course, write all values from zero to 255 at each location, but this is very slow and quite unnecessary: writing a one (bit zero set) followed by a two (bit one set) is good, but writing a three (bits zero and one set) is silly, because you have just tested both these bits. Your series of 'poke' values should therefore be: 0,1,2,4,8,16,32,64,128. This series toggles each bit to a one in turn.

Leave some time between writing to the byte under test and reading from it, as a bad dynamic RAM can sometimes fool you for short periods. So the structure of the best routine will be, for each value, write to all locations; read and compare from all locations; if there is a discrepancy, then print address, written byte and read byte; if not continue.

As each value chosen points to a specific bit in the byte, the address and bad value will indicate which bit, and therefore which chip is duff.

In order to test all the RAM, the routine will have to be in machine code without any system calls and must test system locations without permanently destroying their contents.

Of course the central processing unit stack (page &01) cannot be tested, as you should not turn off the interrupts. I would like to see some readers' solutions to this, so get your thinking caps on and send in your discs and listings.

£10 ATOM VARIABLE STACK

Atom enthusiast Dirk Wreidt earns himself a tenner for a very nice utility (all the way from Germany) which allows the Atom programmer to emulate the Local state-ment on the BBC micro, and much more besides (listing 1). Dirk has provided a 127

level integer precision variable stack which works like the 6502 machine stack, it is a LIFO or 'Last On, First Off' stack. He has intercepted the Atom CLI and added the two additional commands *PUSH and *PULL. Each call is followed by one or more variable names (integer only, @ through Z) using a comma as a delimiter between variables.

Dirk points out that, as the stack is a LIFO, you must pull in reverse order the items you previously pushed, but it is perfectly acceptable to fiddle with the order, and this can be used to interchange values between variables.

The *PUSH and *PULL commands can be followed by any number of variables, separated by commas. These commands are gained by intercepting the vector of the command line interpreter at #206, #207 and therefore have to be preceded by an asterisk.

The whole thing is enabled by linking to the start address of the m/c, in this case #3B00. As it stands, the stack is able to take 127 values. If that is not enough, you can extend it up to 255 by changing lines 280 and 660. The program can only be relocated by changing zero in line 260 and re-assembling the code, as there is a vector changed.


The machine code program is 187 bytes long and it uses two bytes in the zero page, #90 and #91. Location #90 contains the stack pointer, and #91 is a temporary store for the X register. The array ZZ1-ZZ4 contains the addresses of the stacks for the four bytes making up an integer variable.

This is quite a neat bit of assembler programming. My only minor grouse is that the CLI is re-entered at the COS (tape) handling point, so this routine will need to be modified for use with disc systems. This is not strictly a fair objection, however, as I happen to know that Dirk does not have disc.

The modification would not be enormous, however, to make the routine work with either system. If the CLI vector content is picked up and stored on entry to the routine, it could be used as an exit target to either COS or DOS, depending on which was in use at the time.

Perhaps someone would like to submit an update along these lines?

INTERACTIVE 3D

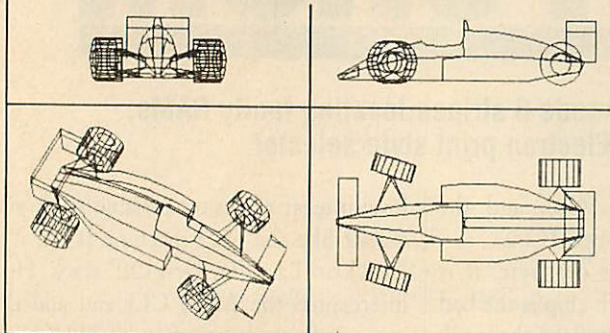

INTERACTIVE 3D is a unique program that actually allows you to create a design directly in a 3D view. And you can zoom, rotate and change view at any time to visualise the effect of design changes. Full editing facilities allow you to create and delete points and lines, and adjust their positions in any direction, all under cursor control without having to enter any numerical data. Circles can be generated automatically and symmetrical forms can be created by reflections. Designs can be saved to tape/disc and reloaded. Views shown on the screen can be saved or printed. Altogether, nearly 50 operations are included. For BBC B, B+ and MASTER series.

- * Acclaimed in reviews (Micro User, Beebug, A&B etc)
 - * Widely used in schools, colleges and industry
 - * Licenced to Education Authorities
 - * Sold in nearly 20 different countries worldwide
 - * Probably the most powerful 3D CAD system for any home micro, and at an unbelievably low price
- £8.95 cassette £12.95 disc (state 40 or 80 track)

DESIGN DYNAMICS

Cheque/PO to: DESIGN DYNAMICS, [A]
8 Meadow Way,
Amphill,
Bedford MK45 2QX

CONTACT BRIDGE

BRIDGE-MENTOR II

VERSION 1.10

"the best offering we have seen for the bridge player so far" **BRIDGE CLUB REVIEW**

"The internationally acclaimed system for the COMPACT/MASTER/BBC/ELECTRON that can really improve your standard of play" Hundreds of users in over 25 countries

Practice your bidding: Perfect your card-play: Create your own archive of interesting hands

With high resolution colour graphics and sound, **BRIDGE-MENTOR II** guides you, step-by-step, through expertly analysed hands. A host of features including the spectacular "AUTOPLAY" option. The package now includes the famous "Challenge" hands archive... in total over 60 testing hands to improve your game... with unlimited scope for more!!!

Now with comprehensive 24 page on-line user guide

BRIDGE-MENTOR II
5 1/4" disc (DFS) £17.50 State 40/80 track 3 1/4" disc (ADFS) £19.50.

Cheques to: **MINIC BUSINESS SERVICES**,
12 WOBURN CLOSE, BUSHEY, HERTS WD2 3XA.



Original
Cassette
version
£16.00

For all MASTER/BBC/ELECTRON COMPACT models with 32K or more and most DFS/ADFS. Disc version available on Tape for transfer to non-standard disc systems.

FAST REPAIRS FOR THE BBC MICRO BY THE ACORN APPROVED SERVICE CENTRE

191 FRESTON ROAD, LONDON W10 6TH
PHONE: 01-968 9214

MICRO FIX

- Repair centre for BBC B, B+, Electron, disc drives etc.
- We have been Acorn service specialists for 3 years and are justifiably recognised as experts in this field.
- BBC micro repairs: average cost £15-£20.
- Complete disc drive calibration: £15/drive.
- Upgrades: Disc - £65 inc. installation.
Econet - £65 inc. installation.
- Other upgrades carried out as required.
- All repairs fully guaranteed.
- Insured return carriage if required.
- Extended warranties available on most equipment.
- Low prices for Mitsubishi disc drives and Acorn peripherals.
- Acorn authorised Econet support centre. Expert installations and trouble-shooting.
- Express service by prior arrangement.
- Opening hours: Normally Mon, Tues 9.30am-6pm, Weds-Fri 10am-4.30, but phone first.

RING 01-968 9214 AND ASK FOR MARK DUFFILL

AA82A

SOFTWARE AT BARGAIN PRICES

ACORN MIRLE SERIES BBC DISKS AT £6.00 EACH

ORDERS PROCESSING
PURCHASING
ACCOUNTS PAYABLE
ACCOUNTS RECEIVABLE

ALL MACHINES

LINKWORD ITALIAN.....£2.00
LINKWORD GERMAN.....£2.00
LINKWORD SPANISH.....£2.00

COLLINS JUNIOR EDUCATION (BBC/MASTER/ELECTRON)

WHATS THE TIME.....£1.50
FIRST NUMBERS.....£1.50
PADDINGTON EARLY VISIT.....£2.00
PADDINGTON DISAPPEARING INK.....£2.00

SPECIAL XMAS OFFER

TRIVIAL PURSUIT (BBC DISC).....£16.95
TRIVIAL PURSUIT (BBC TAPE).....£11.95
FOOTBALL MANAGER ALL MACHINES.....£5.00
FLEET STREET EDITOR (DISC BBC).....£29.95
MR. MEN WORD GAMES (BBC/ELECTRON).....£7.00

ELECTRON

MICROPOWER TITLES AT £1.25 EACH

ADVENTURE
BUMBLE BEE
CHESS
CROAKER
CYBERTRON MISSION
DANGER UXB
ELECTRON INVADERS
ESCAPE FROM MOONBASE ALPHA
FELIX AND FRUIT MONSTERS
FRENZY
GALACTIC COMMANDER
THE GAUNTLET
THE MINE
MOON RAIDER

POSITRON
SWOOP
STOCK CARS
WHERE

BBC 'C' TITLES (TAPE) AT £1.50 EACH

WORDS, WORDS, WORDS
NUMBER PUZZLER
CRANKY
NUMBER CHASER
LETS COUNT
CRAZY TRACER
JARS
CUBE MASTER
SHIRLEY CONRANS GARDEN
SLIDING BLOCK PUZZLE
FAIRSHARE (GRIFFIN)
NUMBER FUN (GRIFFIN)
GETSET (GRIFFIN)
MR T: MEASURING GAME

BBC 'B' DISCS

FIREBUG.....£2.50
QUONDOM (ADVENTURE).....£3.00
MAZE.....£4.00
GO.....£4.50
ARACDIANS.....£2.50
SUPER INVADERS.....£2.50
BOUNCER.....£3.00
FREE FALL.....£2.50
METEOR MISSION.....£2.50
SPHINX ADVENTURE.....£3.50
MONSTERS.....£2.50
BLACK BOX & GAMBIT.....£3.00
METEORS.....£2.50
COUNTDOWN TO DOOM.....£3.50
DROGNA.....£3.00
CAROUSEL.....£2.50
STARSHIP COMMAND.....£3.00
TATRAPOD.....£2.50
SNAPPER.....£3.00
BOXER.....£2.50
PLANETOIDS.....£2.50
JUGGLE PUZZLE.....£3.50
SQUEEZE.....£3.50

ACORNSOFT TITLES AT £1.50 EACH

*SENTENCE SEQUENCING
*WORD SEQUENCING
*MISSING SIGNS
*NUMBER BALANCE
*TALKBACK
*WORKSHOP
*TREE OF KNOWLEDGE
*PEEKO KNOWLEDGE
*DESK DIARY
*PERSONAL MONEY MANAGEMENT
*BUSINESS GAMES
*CREATIVE GRAPHICS
*WORD HUNT

*Titles run on BBC 'B'/Master/Electron

ACORNSOFT TITLES AT £2.00 EACH

ARACDIANS
DRAUGHTS & REVERSI
HOPPER
LISP
SNAPPER
*WATCH YOUR WEIGHT
*CASTLE OF RIDDLES
*FORTH
*SPHINX ADVENTURE
MAGIC MUSHROOM

*Titles run on BBC 'B' & Master

IVAN BERG SERIES (BBC 'B'/MASTER/ELECTRON)

ROYAL QUIZ.....£1.50
MUSIC QUIZ.....£1.50
HISTORY QUIZ.....£1.50
DATING GAME.....£1.50
IDO.....£1.50
THEATRE QUIZ.....£1.50
SCIENCE FICTION.....£1.50
CRIME & PREVENTION.....£1.50
ENGLISH CSE/GCE.....£2.00
BIOLOGY CSE/GCE.....£2.00
MATHS 1 CSE/GCE.....£2.00
MATHS 2 CSE/GCE.....£2.00



Rams Computer Centre

117 QUEENSWAY, BLETCHLEY, MILTON KEYNES MK2 2DH
Telephone: MILTON KEYNES (0908) 647744



Please add 25p
per item for p&p.
All prices include VAT.


```

100REM VARIABLE STACK COMMANDS
110REM FOR THE ACORN ATOM
120REM BY DIRK WRIEDT FEB '86
130REM NEW COMMANDS :
140REM *PUSH X,Y,Z,...
150REM *PULL X,Y,Z,...
160REM £90 CONTAINS STACK POINTER
170REM LINK LLO OR LINK £3B00 TO ENABLE
180REM ERROR MESSAGES :
190REM 67 STACK OVERFLOW
200REM 130 STACK UNDERFLOW
210REM 179 AND
220REM 184 ERROR IN VARIABLE LIST
230GOS.m
240E.
250mREM ASSEMBLE CODE
2600=£3B00;@=0
270DIM ZZ4,LL13
280F.L=1 TO 4;ZZL=0-L*128;N.
290F.L=0 TO 13;LLL=0;N.
300P.$21
310F.L=1 TO 2;P=0
320[
330:LL0\ INIT
340LDA @ (LL1%256)
350STA £206
360LDA @ (LL1/256)
370STA £207
380LDA @0
390STA £90
400RTS
410:LL1\ NEW CLI
420LDA @0 \ DELETE
430STA £DD\ 'FLOAD' FLAG
440LDA £100
450CMP @CH"P" \ FIRST LETTER
460BEQ LL2
470JMP £FBEF\ NOT P => OLD CLI
480:LL2\ 1ST LETTER OK
490LDA £102 \ 3RD LETTER
500CMP @CH"S"
510BEQ LL3
520CMP @CH"L"
530BEQ LL7
540JMP £FBEF\ NO SUCCESS, OLD CLI
550:LL3\ PUSH
560TXA\ SAVE X REG.
570PHA
580LDX @0
590:LL4INX \ SEARCH
600LDA £100,X \ FOR
610CMP @32 \ BEGIN OF
620BNE LL4 \ VARIABLE
630INX\ LIST
640:LL5JSR LL11 \ GET NEXT VARIABLE
650LDA£90 \ TEST
660CMP@127\ FOR
670BNELL6
680BRK\ OVERFLOW !
690:LL6
700INC £90\ INC STACK POINTER
710LDY £90
720LDA £322,X \ COPY
730STA ZZ1,Y \ VALUE
740LDA £33D,X \ OF
750STA ZZ2,Y \ VARIABLE
760LDA £358,X \ TO
770STA ZZ3,Y \ TOP
780LDA £373,X \ OF
790STA ZZ4,Y \ STACK
800LDX £91 \ CONTINUE
810INX \ WITH
820LDA £100,X \ NEXT
830INX \ VARIABLE
840CMP @CH", " \ IN
850BEQ LL5 \ THE LIST
860PLA\ RESTORE X REG.
870TAX
880RTS\ EXIT
890:LL7\ PULL
900TXA
910PHA
920LDX @0
930:LL8INX
940LDA £100,X
950CMP @32
960BNE LL8
970INX
980:LL9JSR LL11 \ NEXT VARIABLE
990LDY £90 \ CHECK
1000BNE LL10 \ FOR
1010BRK \ UNDERFLOW !
1020:LL10 LDA ZZ1,Y\ COPY
1030STA £322,X \ TOP
1040LDA ZZ2,Y \ OF
1050STA £33D,X \ STACK
1060LDA ZZ3,Y \ TO
1070STA £358,X \ VARIABLE
1080LDA ZZ4,Y
1090STA £373,X
1100DEC £90 \ DEC STACK POINTER
1110LDX £91 \ CONTINUE
1120INX \ WITH
1130LDA £100,X \ NEXT
1140INX \ VARIABLE
1150CMP @CH", " \ IN
1160BEQ LL9 \ THE LIST
1170PLA \ RESTORE
1180TAX \ X REG.
1190RTS \ EXIT
1200:LL11 LDA £100,X \ SUBROUTINE :
1210SEC \ CALCULATE
1220SBC @65 \ OFFSET
1230BPL LL12 \ FOR
1240BRK \ NEXT
1250:LL12 CMP @26 \ VARIABLE
1260BMI LL13 \ AND
1270BRK \ CHECK
1280:LL13 STX £91 \ WHETHER
1290TAX \ IN
1300RTS \ RANGE
1310J
1320N.
1330P.$6
1340C=0
1350F.L=0 TO P-1
1360C=C+L*?L
1370N.
1380IF C<>£13046181;P.'''$7"CHECKSUM ERROR !";E.
1390P.''' *SAVE ""VARSTACK"" "%0" "&P"$11
1400R.

```

Listing 1. Allows the Atom programmer to emulate the Local statement on the BBC micro

MORLEY ELECTRONICS

NOW NEWCASTLE'S MAIN ATARI DEALER COMPUTERS, PERIPHERALS, SOFTWARE

The Morley Teletext adapter introduces you to the world of Teletext at a price that won't break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than eight years ago, will be fully compatible with any future advances in the Teletext system.

With the Morley adapter you will get a unit that automatically tunes itself in to the required station (no more messing around with screwdrivers in the back of the case), a user friendly menu driven program, easy to follow instructions and a 12 month warranty. Add to this the free downloadable teletext software and we are sure that you will agree that we are offering you one of the best bargains on the market today.

For technical details please ring Morley Electronics on Tyneside (091) 262 7507 after 4.00pm


FEATURES

● Advanced design uses the latest technology will handle ANY future enhancements to the Teletext system eg: full field: 8 bit data transfer: 2k pages etc.

- Simply plugs into the user port.
- Low power consumption, less than 200ma. Optional power supply available.
- User friendly menu driven software including extended OSCILL and Osword commands for access from BASIC programs.
- No user-RAM required (PAGE remains at default value).
- FREE Teletext software, no access charges. (at present updated weekly.)
- Save selected pages to disc/tape for later retrieval.
- Full access to all Teletext services and channels eg: CEEFAX, ORACLE, 4-TEL.
- Gives you a real-time clock at your disposal (*TIME).
- Free software upgrades to allow for any enhancements to the teletext service. Eg: extra channels, full field data on cable & satellite systems etc.
- Easy to follow comprehensive user guide.
- No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- Works with Solidisc SWR.



● Utils disc available including printer drivers allows pages to be selected and dumped direct to a printer (no more TV or Radio Times to buy).
ELECTRON TELETEXT ADAPTER
Electron adapter now available, including emulated Mode 7 allowing you to run long Adventure type programs. Please ring for details.

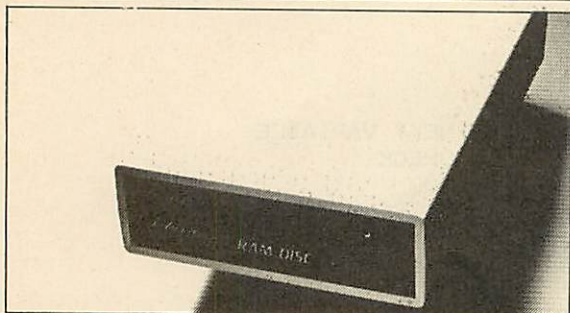

Now available the first true MEGA capacity RAMdisc for the BBC or MASTER computers.

This fully compatible unit, currently available in either 1 or 2 megabyte versions comes complete with operating software on ROM, power supply, battery backup and a comprehensive user guide, add to this our usual 12 months no quibble guarantee and we're sure you'll agree Morley have done it again.

FEATURES

1 Megabyte of RAM connected to the 1 MHz bus.
Used with the supplied ROM software programs and files may be saved and loaded from the RAMdisc in the same manner as from a floppy disc with a large increase in speed, for example, a 20K mode 0 screen takes about 3-4 seconds to load from disc and about 0.2-0.3 seconds to load from the RAMdisc.
The RAMdisc ROM operates as a utility ROM working with the current filing system rather than as a separate filing system. Therefore ensures compatibility with any Acom compatible DFS (not ADFS).
The RAMdisc can be selected by a * command to take the place of any drive number from 0 to 9. If the RAMdisc replaces a floppy drive as 0 for example, all commands addressed to drive 0 will be intercepted by the RAMdisc. The default drive no. is 4.
'Dangerous' * commands such as *COMPACT, *COPY, *BACKUP etc are intercepted and the BBC's RAM from page 2 to &7FFF is saved to RAMdisc workspace, and may be recovered using a * command. This prevents accidental corruption of any programs/data in RAM you may have been using at the time. The save operation delays the * command by just under 0.4 seconds. The BBC's RAM can also be saved by an interrupt-driven routine which can be enabled by a * command.
The 'filing system wedge' ROM supplied supports load/save, byte file access, all relevant OSFSC commands, and contains a formatter, verifier and 'sector' editor for use with the RAMdisc.
Catalogue structure allows up to 2,709 files.

EPROM PROGRAMMER now available programs 8, 16 and 32k EPROMS connects to the user port software available on rom or disc.

Version 1 economy uncased with standard DIL socket.

Version 2 deluxe cased with ZIF socket.

DESFAX 7 - Now you can run your own TELETEXT service!

Incorporates the powerful editing facilities of DESIGN 7, again with Teletext adapter interfacing.

Stores up to 100 of your screen designs on a 40Tk disc or 200 on an 80Tk. Page selection by 3-digit number HOLD, REVEAL, page linking, individual page delays etc.

PLUS - a powerful CAROUSEL facility permits continuous slide-shows. Only one disc access for every 16 screens - reduces wear on drives. Smooth animation, variable speed text printing, built in printer dumps. Sample data disc and 22 page manual included. Beats all other systems for ease of use and versatility.

M/B software DESIGN 7

Easily the best value Mode 7 screen designer on the market today. Design any mode 7 screen, from simple MENU pages to full CEEFAX standard. This program is an invaluable aid. Designs can be saved to disc as automatically numbered files or the program will convert the screen into a Basic Proc.

INTERFACES DIRECTLY WITH ADAPTER allowing CEEFAX-ORACLE pages to be selected and dropped into editor screen for alteration, saving, or conversion to BASIC. Allows channel change from within program.

M/B software MASTER COPY

... the selective copier you need for the BBC MASTER computer ...

Dramatically reduces the time taken to copy unprotected discs,

DFS to ADFS, ADFS to DFS, DFS to DFS, ADFS to ADFS

using one or two, single-ro double-sided drives.

An 84K RAM buffer enables many files to be copied in one pass with the minimum of disc swapping, and directories are created automatically as required. Files of any length are handled.

Supplied on disc, MASTERcopy runs from sideways RAM and is invoked with a * command. The program re-installs itself in sideways RAM when copying is done, ready for later use.

The ROM image supplied can be used to blow your own EPROM too, for use in the MASTER's cartridge slots.

Typical time to copy all 31 files DFS to ADFS is under 2 minutes!

£12.95 on disc - £14.95 for ROM version (including postage etc.)

**For further details on all products
call 091 262 7507 after 4.00pm**

To order please fill in and send order form to: **MORLEY ELECTRONICS, Unit 3, Maurice Road Industrial Estate, Wallsend, Tyne and Wear NE28 6BY.**

Adaptor Software

ROM ☐

SWR DISC ☐

40 TRK ☐

80 TRK ☐

Please Tick

Please send me

Qty. ☐ Morley Teletext adaptors

Qty. ☐ Master Copy ROM

Qty. ☐ Master Copy Disc

Qty. ☐ M/B DESIGN7 screen designer

Qty. ☐ Teletext utilities on Disc

@ £99.95 inc. VAT

@ £13.95 inc. VAT

@ £11.95 inc. VAT

@ £7.95 inc. VAT

@ £5.95 inc. VAT

Qty. ☐ Optional PSU

Qty. ☐ 1 Mbyte RAM disc

Qty. ☐ 2 Mbyte RAM disc

Qty. ☐ Eprom Programmer V.2

Qty. ☐ Eprom Programmer V.2

Qty. ☐ Desfax

@ £9.95 inc. VAT

@ £199.95 inc. VAT

@ £349.95 inc. VAT

@ £18.95 inc. VAT

@ £27.95 inc. VAT

@ £23.00 inc. VAT

Total £



NAME _____ PHONE No. _____ CHEQUE No. _____

ADDRESS _____

POSTCODE _____

Please add £3.00 P+P on Adaptors and RAM Discs, £2.00 P+P on PSU's and Programmers, £1.00 P+P on Software.

Please allow 28 days for delivery

25 ELECTRON PRINT SELECTOR

Listing 2 (below) is a conversion for the Electron of John Dalton's print style selector (Forum July '86), by G E Prince of Attleborough in Norfolk. He has written this for his Mannesmann Tally MT80+, which I believe is Epson compatible, so this listing should be of interest to a lot of Electron users. Thanks a lot Mr Prince, a fiver for a nice conversion.

```

10 REM Acorn Forum
20 REM Printer Style
Selector
30 REM by John Dalton
40 REM for Electron w
ith Plus 1
50 REM (c) Acorn User
December 1986
60 :
70 ON ERROR GOTO 920
80 RESTORE: I%=0
90 REPEAT: READ a$, a$
100 I%=I%+1: UNTIL a$=""
END"
110 item%=I%-2
120 MODE 6
130 VDU 23,1,0,0;0;0;
140 PROCinit
150 PRINTTAB(6)"Printe
r Command Selector"
160 PRINTTAB(4,22)"Pre
ss <RETURN> to make sele
ction"
170 PRINTTAB(4)"<COPY>
to test print,<ESC> to
end"
180 VDU 28,0,21,39,3
190 FOR I%=0 TO item%
200 PRINTTAB(4)"("CHR$
(I%+65))". "; "a$(I%,0)
210 NEXT
220 PROCinput(0)
230 Y%=0: X%=2
240 REPEAT
250 up%=FALSE: down%=FA
LSE
260 VDU 31,X%,Y%,32,91
,31,X%+6,Y%,93
270 a$=GET$
280 IF a$=CHR$(&D) PRO
Cinput(Y%)
290 IF INKEY(-106) PRO
Ctestpiece
300 IF a$=CHR$(&8B) AN
D Y%>0 up%=TRUE
310 IF a$=CHR$(&8A) AN
D Y%<item% down%=TRUE
320 IF up% OR down% VD
U 31,X%,Y%,32,32,31,X%+6
,Y%,32

```

```

330 IF down% Y%=Y%+1
340 IF up% Y%=Y%-1
350 UNTIL FALSE
360 END
370 :
380 DEF PROCinput(I%)
390 VDU 28,1,21,39,19,
12
400 j$=a$(I%,1)
410 VDU 2,1,27
420 J%=1
430 REPEAT
440 f$=""
450 REPEAT
460 d$=MID$(j$,J%,1)
470 IF ASC(d$)>47 AND
ASC(d$)<58 f$=f$+d$
480 IF d$="n" VDU 3:f$
=FNSpec(I%):VDU 2
490 J%=J%+1
500 UNTIL MID$(j$,J%,1)
)="!" OR MID$(j$,J%,1)="
*"
510 F%=VAL(f$)
520 VDU 1,F%
530 UNTIL MID$(j$,J%,1)
)="*"
540 VDU 3
550 CLS
560 VDU 28,0,21,39,3
570 IF I%=0 FOR H%=1 T
O 15:PRINTTAB(1,H%)" ":N
EXT
580 PRINTTAB(1,I%)"*";
590 ENDPROC
600 :
610 DEF FNSpec(I%)
620 PRINTTAB(9)a$(I%,0)
)
630 VDU 23,1,1;0;0;0;
640 INPUTTAB(9)"Enter
value ">"g$
650 VDU 23,1,0;0;0;0;
660 =g$
670 :
680 DEF PROCtestpiece
690 VDU 2
700 *FX 3,10
710 FOR D%=1 TO 3
720 FOR A%=32 TO 126
730 PRINTCHR$(A%);
740 NEXT
750 NEXT
760 PRINT
770 *FX 3,0
780 VDU 3
790 ENDPROC
800 :
810 DEF PROCinit
820 *FX 4,1
830 DIM a$(item%,1)
840 RESTORE
850 FOR I%=0 TO item%
860 READ a$(I%,0),a$(I
%,1)

```

```

870 NEXT
880 ENDPROC
890 :
900 REM Error handling
910 :
920 ON ERROR OFF
930 *FX 4,0
940 *FX 3,0
950 VDU 3,26,12
960 IF ERR<>17 REPORT:
PRINT" at line ";ERL
970 IF ERR=17 PRINT"Pr
inter set"
980 END
990 :
1000 DATA Reset Printer
to Default
1010 DATA 64*
1020 DATA Select French
Character Set
1030 DATA 82:1*
1040 DATA Select Elite
Style
1050 DATA 33:1*
1060 DATA Select Condensed
Style
1070 DATA 33:4*
1080 DATA Set Emphasise
d Print On
1090 DATA 69*
1100 DATA Set Double St
rike On
1110 DATA 71*
1120 DATA Select Italic
Style
1130 DATA 82:19*
1140 DATA Set Underline
On
1150 DATA 45:1*
1160 DATA Double Width
(Enlarged) Print
1170 DATA 87:1*
1180 DATA Set Superscri
pt On
1190 DATA 83:0*
1200 DATA Set Subscript
On
1210 DATA 83:1*
1220 DATA Select Americ
an Character Set
1230 DATA 82:0*
1240 DATA Set Unidirect
ional Printing
1250 DATA 85:1*
1260 DATA Set Line Spac
ing (n/72) in.
1270 DATA 65:n*
1280 DATA Set Left Marg
in (n)
1290 DATA 108:n*
1300 DATA Set Right Mar
gin (n)
1310 DATA 81:n*
1320 DATA ***,END,***

```


MULTIPROM EPROM PROGRAMMER



MULTIPROM allows the experienced user to program 2764, 27128, 27256, 27512, 27513 and 27011 EPROMs, including "A" version. Programming of 27256 up types is carried out in 16K blocks to ensure MULTIPROM compatibility with all models of BBC from B to Master. The UVP 1.1 software requires DFS and a disc drive for operation.

The fully cased MULTIPROM plugs into the user port on the BBC microcomputer, taking power directly from the computer, with an onboard converter providing the programming voltage. Two switches with LEDs are provided, one powering down the MULTIPROM to insert or remove an EPROM from the Textool ZIF socket, and one for Vpp on/off. DIP switches enable swift configuration of the MULTIPROM for each type of EPROM.

The necessary UVP 1.1 software, which includes fast intelligent programming algorithm, is available on Sideways ROM and contains the following commands:- *TEST (blank check), *READ (afsp), (read EPROM to disc), *BLOW (afsp) (blow EPROM with named file), *VIEW (look at contents of memory from &2000), *COMP (afsp) (compare contents of EPROM to disc). When using *VIEW & *COMP, data is displayed in hex and ASCII format.

Prices: MULTIPROM £44.95 UVP 1.1 ROM £5.00


Type	1-2	3-9	10+
EPROMS 2764-25	£2.30	£2.20	£2.10
27128-25	£3.00	£2.90	£2.60
27256-25	£5.00	£4.90	£4.80

UVIPAC EPROM ERASER

The UVIPAC was designed especially for the home microcomputer enthusiast, but is equally useful in the development lab when quick erasure of just a couple of EPROMs is required.

A special type of discharge tube is used to help achieve the very compact dimensions of the unit, which is housed in a 90 x 80 x 40 mm plastic case. The 230 or 110 volt (+ or -5%) mains powered unit enables up to 3 EPROMs of any size, or 1 CPU with on-board EPROM to be erased in around 15 minutes usually.

The EPROMs are simply loaded into the conductive foam pad supplied and inserted into the unit. After the door has been closed the unit is switched on, an optical fibre indicator showing positively that the unit is in operation. When the required period has elapsed the unit is switched off and the EPROMs removed. The UVIPAC can also be supplied with a built in fixed 15 minute timer, the UVIPAC (T), or with timer and audible time out sounder, the UVIPAC (TS). Spare tubes and conductive foam pads are available if required.

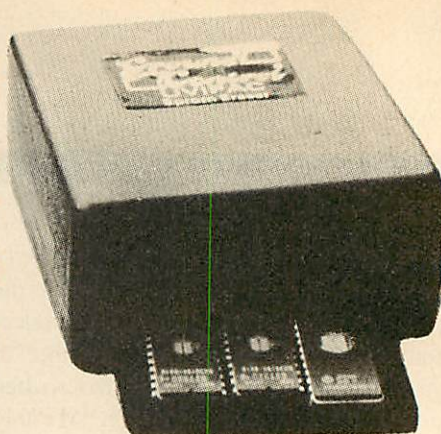

Prices: UVIPAC £21.45 UVIPAC (T) £26.45 UVIPAC (TS) £28.45

UVIPROM 1 and UVIPROM 2 (with ZIF socket) plus into the user port and can program 2764 or 27128 EPROMs only, using the 1.1 ROM for control purposes, giving 5 *COMMANDS. UVIPROM 32 and UVIPROM 32+ (with ZIF socket) program 27256 EPROMs only, using the 2.1 ROM, with 7 *COMMANDS. Note that the PCBs are not cased and that a disc drive is essential to use the software.

Prices:- UVIPROM 1 & 32 £20.95 UVIPROM 2 & 32+ £25.95 1.1 ROM £5.00 2.1 ROM £8.00

Ground Control

Send orders to:
Dept. AU
Ground Control
Alfreda Avenue
Hullbridge
Essex SS5 6LT
TEL: 0702 230324

ALL PRICES INCLUDE
VAT AND P & P.
MAIL/TELEPHONE
ORDERS ONLY PLEASE.
DETAILED DATA ON
REQUEST

BBC MASTER DUSTCOVERS £4.95

Made from stone-coloured nylon which has been coated with PU to which an anti-static inhibitor has been added.

These fabric covers are attractively finished with brown piping and have the computer name Hot Foil printed over the keyboard. They are washable and may be ironed with a cool iron.

Similar covers for BBC B.

TAILORED COVERS FOR VIGLAN CONSUL P.C. £8.50

A large selection of matching covers available for printers from £4.50 and monitors from £4.95.

BBD Computer Dustcovers
The Standish Centre

Cross Street
Standish, Wigan

Tel: 0257 422968



AA216

DISK DRIVE REPAIRS

All makes of BBC disk drives . . .

REPAIR, ALIGNMENT AND TEST£35.00

BBC AND COLOUR MONITOR REPAIRS . . .

* 3 MONTHS WARRANTY.

* FIXED REPAIR CHARGES.


All prices exclude spare parts, delivery
and V.A.T charges

**AN ELECTRONIC & COMPUTER
SERVICES LTD**

130B North Lane, Aldershot, Hants.

Tel: (0252) 25608

Micro Musician POLYPHONIC MUSIC PROCESSOR SYSTEM

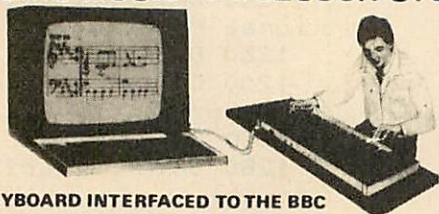

A CASIO KEYBOARD INTERFACED TO THE BBC
PLUS A PROFESSIONAL 8PART MUSIC EDITOR ON DISC

For only £199 +VAT (MINI KEYBOARD) £249 +VAT (FULL SIZE KEYBOARD)

* Teaching * Performance * Composition * Music Printing * Traditional Notation
* Scrolling Colour Display * Parts Analysis * Many unique outstanding features

MICRO MUSICAL LTD

37 Wood Lane, Shilton, Coventry CV7 9LA. Telephone (0203) 616760

Design your own

PCB
with the

BBC COMPUTER

Lay out double sided PCB on the screen, separating the layers by colour. Store design on disc, recall for editing or plot it on an Epson HI-80. A-4 plotter ready for 2:1 photo reduction. 40 or 80 Trac disc based software £20.

**VINDEREN ASSOCIATES, PO BOX 130,
BELFAST BT9 6NB. TEL: 0232 667885**

AA117

LOW COST C.A.D.

ATTENTION ALL ELECTRONICS CIRCUIT DESIGNERS!! "IBM PC (and compatibles), BBC MODEL B, B+ and MASTER, AMSTRAD CPC and SPECTRUM 48K"

ANALYSER I and II compute the A.C. FREQUENCY RESPONSE of linear (analogue) circuits. GAIN and PHASE, INPUT IMPEDANCE, OUTPUT IMPEDANCE, and GROUP DELAY (except Spectrum version) are calculated over any frequency range required. The programs are in use regularly for frequencies between 0.1Hz to 1.2GHz. The effects on performance of MODIFICATIONS to circuit and component values can be speedily evaluated. Circuits containing any combinations of RESISTORS, CAPACITORS, INDUCTORS, TRANSFORMERS, BIPOLAR AND FIELD EFFECT TRANSISTORS and OPERATIONAL AMPLIFIERS can be simulated - up to 60 nodes and 180 components (IBM version).

Ideal for the analysis of ACTIVE and PASSIVE FILTER CIRCUITS, AUDIO AMPLIFIERS, LOUDSPEAKER CROSS-OVER NETWORKS, WIDE-BAND AMPLIFIERS, TUNED R.F. AMPLIFIERS, AERIAL MATCHING NETWORKS, TV I.F. and CHROMA FILTER CIRCUITS, LINEAR INTEGRATED CIRCUITS etc.

STABILITY CRITERIA AND OSCILLATOR CIRCUITS can be evaluated by "breaking the loop".

Tabular output on Analyser I. Full graphical output, increased circuit size and active component library facilities on Analyser II.

Check out your new designs in minutes rather than days.

"ANALYSER" can greatly reduce or even eliminate the need to breadboard new designs.

Used by INDUSTRIAL, GOVERNMENT and UNIVERSITY R&D DEPARTMENTS worldwide. IDEAL FOR TRAINING COURSES. VERY EASY TO USE. Prices from £20-£195.

LOW COST COMPUTER DRAUGHTING ON THE BBC MODEL B, B+ and MASTER

DRAWER I enables quality drawings to be created, and modified, quickly, easily and with the minimum of hardware. All of the major program elements are written in machine code giving exceptional speed of operation.

FEATURES

Rubber Banding for drawing lines. Solid or Dotted line types. Circles, Arcs and partial or complete Ellipses. Vertical or Horizontal Text. Pan and Zoom. Merging of drawings and library symbols from disc.

Up to 20,000 lines on a drawing.

Snap to a user defined grid.

Absolute or Relative cursor co-ordinates displayed on screen.

Input from analogue joystick, mouse or trackball.

Output to standard dot matrix printer or pen plotter.

Prices from £45 - ex VAT.

Minimum Hardware Required:

BBC Model B.

Single or Dual 5.25" Disc Drive - 40 or 80 track.

TV or monitor.

Games Joystick, Mouse or Trackball.

Dot Matrix Printer (Epson 80 series or Epson compatible - BBC default mode).

Full AFTER SALES SERVICE with TELEPHONE QUERY HOTLINE and FREE update service

For illustrated leaflets and ordering information please write or phone:

NUMBER ONE SYSTEMS LIMITED

TEL: 0480 61778

Ref: AU

Crown Street,

St Ives Huntingdon, Cambs PE17 4EB

AA181A

Electronequip

★ SPECIAL OFFERS ★

Citizen 120D

with BBC cable & paper

£179.95 inc V.A.T. & Delivery

TELEMOD III MODEM £89.00

KAGA KP810 Single Sheet Feeder £109.00

ZENITH Green/Orange Monitor £84.95

COMPUTERS

Master 128 Computer.....	£489.00
Master Compact without monitor.....	£441.25
Master Compact with colour monitor.....	£678.85
Compact Printer lead.....	£17.25
5 1/4" Adaptor lead for Compact.....	£19.95
SOFTWARE AVAILABLE FOR MASTER AND MASTER COMPACT	


DISCS AND DRIVES

Dual 800K 40/80T (No P.S.U.).....	£195.00
Single 400K/80T (No P.S.U.).....	£99.00
1 Box DS/DD 96 TPI (10).....	£13.95 inc
1 Box 3 1/2" D.S. Discs (10).....	£39.00
5 1/4" Disk cleaning kit.....	£5.99 inc

VOLTACE JOYSTICKS

Voltmace Delta 14B Joysticks.....	£13.46
Voltmace 14B/1 Adaptor Box.....	£13.36
Voltmace Delta 3B Twin Joysticks.....	£17.99
Voltmace Delta 3B Single Joystick.....	£11.95

SIDEWISE



16K A 4
R T :
A P 6
M L 0

SIDEWISE FITTED



"SIDEWAYS" rom board for BBC Micro.
No soldering required £39.33 inc VAT

BBC MICRO SPARES

Keyboard	£39.95	Keystrip	£1.99	Speaker	£2.99
Power Supply	44.95	Case	19.99	Keyswitch	2.30
All inc VAT					

EDUCATIONAL AND H.M.G. ORDERS WELCOME

Prices subject to variation without prior notification
All offers subject to availability
Post 90p (per item) inc V.A.T.
Securicor £6.00 (per parcel) inc V.A.T.
Large stocks - 24 Hour Despatch (often same day)
Large order discounts (phone for details)

Acorn
The choice of experience



MAIN BRANCH:

59 WEST STREET, FAREHAM,
HAMPSHIRE PO16 0AT

Tel: (0329) 230670

ALSO AT:

17 TENNYSON AVENUE,
KINGS LYNN, NORFOLK
Tel: (0553) 773782

SOFTWARE

Business

Suitable for standard and Master Series Computers

CASHBOOK Double Entry bookkeeping in RAM for clubs.....£13.75

CASHBOOK Double Entry random access bookkeeping for clubs.....£22.95

★★★

ACCOUNT Double Entry random access bookkeeping with credit control, ledgers and analysis for businesses.....£34.45

★★NEW★★

ACCOUNT PLUS as above with data sort, auto statement generator, invoice, order, quotations etc. mail shot merge.....£57.50

MICRO-TRADER The complete BBC accounts system. Demo disc £10.....£245.00

MICRO-STOCK 4000 items suitable for use with Micro-Trader.....£86.25

★★★

RANDOM MAILING mail merge, 5 sorts, 1, 2, or 3 across labels.....£34.45

★★★

EXTENDED PAYROLL "Impressive package - Micro User" 1, 2, 4 weekly & monthly, contracted in & out, 3 overtime, personnel file, 2 payslip formats, plus, plus.....£57.50

★★★

SPECIAL THREE STAR OFFER.....ALL THREE FOR £79.95

★★★

FAMILY TREE 340 people 100 marriages. Ancestral, descendant & genealogical tracing with full tree printout. Sorted IGI list (Special Shadow RAM version available).....£19.95

★★★

STATPACK the stats package for students, 30 results.....£13.75

★★★

CARETAKER UTILITY "If you write BASIC you need it".....£29.90

★★★

DISC DOCTOR "Still the best utility for the BBC".....£29.90

★★★

PRINTMASTER UTILITY "Beats the best".....£29.90

★★★

INTER-CHART data display "Quite clever - well very clever".....£34.50

★★★

INTER-SHEET SPREADSHEET "Not bad! - its the best".....£51.75

★★★

INTER-WORD "The new WISIWYG super wordprocessor" (Special Offer).....£49.95

★★★

WORDWISE PLUS "Still selling more than others".....£51.75

★★★

SYSTEM DELTA "The cleverer than clever database".....£64.95

★★★

27128 16k = £2.95 27256 32k = £4.75

★★★

UVIPAC Eprom Programmer 8 & 16k.....£21.50

★★★

UVIPAC Eprom Programmer 32k.....£21.50

★★★

UVIPAC Eprom Eraser £21.50: Toolkit Eprom Software.....£10.00

★★★

EPSON P40 80 column dot matrix beautiful quality print.....£37.95

★★★

Ribbons of various types at around.....£5.00

★★★

Suitable for BBC/Electron to parallel printers.....£7.95

★★★

800k Opus twin double sided cased.....£215.00

★★★

5.25" Double sided double density 80 tracks in box.....£10.95

★★★

C15 boxed in 5's, leaderless, ideal data tapes.....10 for £2.50

★★★

Box 2000 fanfold perforated sheets 11" x 9.5".....£12.95

★★★

Box 2000 Micro perforated sheets A4.....£19.95

★★★

For Mailing 1000 1 across 3.5" x 1.4375.....£6.50

★★★

For Mailing 2000 2 across 3.5" x 1.4375.....£11.95

★★★

For Mailing 1000 3 across 2.75" x 1.4375.....£6.50

★★★

KEYBOARD PROTECTOR ★★★NEW★★★ special for BBC.

★★★

VIZIFLEX Grease, dirt & waterproof in use.....£19.95

★★★

ASK FOR BROCHURE FOR MORE SOFTWARE AND FURTHER DETAILS

Prices include VAT. Add 55p for p/p

(AU).

Micro-Aid

25 Fore Street, Praze, Camborne, Cornwall TR14 0JX

or Telephone 0209-831274 with ACCESS

or PRESTEL *2582020



PINEAPPLE SOFTWARE

Programs for the BBC models 'B' with disc drive with **FREE** updating service on all software

DIAGRAM

Still the only drawing program available for the BBC micro which gives you the ability to draw really large diagrams and scroll them smoothly around the screen stopping to edit them at any time if required.

Pineapple's unique method of storing the diagram information on disc means that the size of diagrams is limited only by the free space on disc, and not the amount of computer memory you have available. (A blank 80 track disc will allow up to 39 mode 0 screens of diagram).

The superb print routines supplied with the program enable large areas of the diagram to be printed in a single print run in a number of different sizes and rotated through 90 deg. if required. Full use can also be made of printers which have a wider than normal carriage available.

The program is fully compatible with the Marconi Tracker ball described below.

PLEASE STATE 40 or 80 TRACK DISC & WHETHER STANDARD BBC or MASTER VERSION IS REQUIRED

PRICE £25.00 + VAT

DIAGRAM UTILITIES

A suite of six utility programs which add additional features to the 'Diagram' drawing program. The utilities include the saving and loading of areas of diagram to and from disc. The ability to display the whole of your large diagram on the screen at one time (in either 4*4 or 8*8 screen format). The addition of borders and screen indents to diagrams, and the ability to shift a whole diagram in any direction.

PRICE £10.00 + VAT

MARCONI TRACKER BALL

This high quality device comes with its own Icon Artmaster drawing program and utilities to enable it to be used in place of keyboard keys, joysticks, or with your own programs.

PRICE £60.00 + VAT p&p £1.75

PRICE INCLUDING 'DIAGRAM' SOFTWARE £79.00 + VAT p&p £1.75

TRACKER BALL for MASTER series

The Pointer ROM is supplied instead of the Icon Artmaster disc and enables the Tracker ball to work directly with the MASTER series computers. (e.g. to use with TIMPAINT etc.). Prices are the same as for the standard tracker ball.

POINTER

The Pointer Rom is available separately for people already owning tracker balls, and comes with instructions for use with the MASTER computer.

PRICE £12.50 + VAT

PCB

This new release from Pineapple is a printed circuit board draughting aid which is aimed at producing complex double sided PCB's very rapidly using a standard BBC micro and any FX compatible dot-matrix printer.

The program is supplied on EPROM and will run with any 32k BBC micro (including Master series). Also supplied is a disc containing a sample PCB layout to demonstrate the programs features.

By using an EPROM for the program code the maximum amount of RAM is available for storing component location and ASCII identification files etc. (Up to 500 components and 500 ASCII component descriptions may be stored for a given layout). There is no limit to the number of tracks for a given PCB, although the maximum size of board is restricted to 8" * 5.6".

Using a mode 1 screen, tracks on the top side of the board are shown in red, while those on the underside are blue. Each side of the board may be shown individually or superimposed. A component placement screen allows component outlines to be drawn for silk screen purposes and component numbers entered on this screen may be displayed during track routing to aid identification of roundels.

The print routines allow separate printouts of each side of the PCB in a very accurate expanded definition 1:1 or 2:1 Scale, enabling direct contact printing to be used on resist covered copper clad board.

This program has too many superb features to describe adequately here, so please write or phone for more information and sample printouts?

PRICE £85.00 + VAT

CONVERTER LEADS

Converter leads to enable the Trackerball to run mouse software and the mouse to run trackerball software (inc. DIAGRAM). Please state which way round when ordering.

PRICE £8.00 + VAT

BASIC COMPILER

Use our Basic Compiler to produce direct 6502 machine code programs and ROMs for your own Basic programs. Speed increases of up to 25 times are achieved.

PRICE £25.00 + VAT

**ALL ORDERS SENT BY
RETURN OF POST**

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL. ☎ Tel: 01-599 1476

Softlife

**LOW COST - HIGH QUALITY -
PRODUCTS FOR THE BBC MICRO**

EPROM PROGRAMMER: programs 2764, 27128, 2764A and 27128A eproms. Operating software supplied on eprom. ROM formatting facility **£69**

NUMERIC KEYPAD: facilitates rapid entry of numeric data. Fully programmable. Hand-held or free-standing **£60.25**

LOGIC ANALYSER: multiple functions include: test and repair, development of logic circuits, and education. 8 MHz 8 channel **£250**



All products complete with comprehensive documentation and 1 year guarantee. All prices excl. VAT inc. P&P

For further information contact: Gary Daltrey
Softlife Limited 87 Silvertown Way
London E16 4AH Tel: 01 474 0330

THE MASTER

in

WEST WALES

MASTER 128 COMPUTER

MASTER COMPACT RANGE

and

everything for the BBC-B OWNER.

including

MONITORS—PRINTERS—DISC DRIVES—
UPGRADES—DISKS—PAPER—RIBBONS—
BOOKS—MICE—PLOTTERS—ROBOTICS—
MODEMS—ROMS—MIDI—CASIO SYNTHS—
STEPPER MOTORS—DISC STORAGE BOXES.

* Plus software old and new for business, education and leisure. *

* BBC upgrades, spares, and after sales service *

with products for electron owners too. *

BBC stockist since Acorn split the Atom. *

* Amstrad PCW & PC etc *


* If you live in Dyfed, give us a call *

Access & Visa welcome

**Cardigan Electronics, Chancery Lane,
Cardigan Dyfed.**

Tel 0239 614483

**Shop hours Mon-Sat 10am - 5pm
Closed all day every Wednesday**

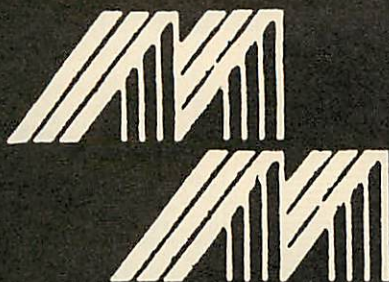

M & M COMPUTERS

Bon-Accord Huse
41 Albert Street, Aberdeen AB1 1XU
Tel: 0224-571735
Telex 739916

ROM Software

View.....	£59.80
Viewsheet.....	£59.80
Wordwise Plus.....	£54.00
Printmaster.....	P.O.A.
Graphics.....	P.O.A.
Disc Doctor.....	£29.95

AMX Mouse CAD system.....	£75.00
AMX Pagemaker.....	£49.95
AMX 3D-Zicon.....	£24.95
AMX Database.....	£24.95
AMX XAM.....	£24.95
AMX Desk.....	£24.95
AMX Utilities.....	£14.95

Monitors

Microvitec 1431 Standard.....	£205.00
Microvitec 1451 Medium.....	£279.00
Microvitec 1441 High.....	£425.00
BMC High Res. Green Screen.....	£109.95
Zenith ZVM Green or Amber.....	£89.95

Computers

BBC Master 128k.....	£499.00
BBC Compact Colour system.....	£687.35
PAC TV Adaptor.....	£24.90
BBC Compact entry system.....	£441.25

Disc Drives

Cumana disc Drives	
CSX100 40T single, no psu.....	£99
CSX400 80T single, no psu.....	£137
CS100 40T single, with psu.....	£124
CS400 80T single, with psu.....	£131*
CD200 80T dual, with psu.....	£247
CD800/S 40T/80T dual with psu ..	£269*
.....DFS Kit 8271	£89.00
ADFS Kit 1770 (unfitted)	£59.95
Cumana OFS Double Density Kit	£39.95

CD 800S

5 1/4" Double-sided 800K dual
disk drive 40/80 track
switchable with own
Power supply



CS 400S

5 1/4" Double-sided 400K
single disk drive 40/80 track
switchable with own Power
supply



CSX 400S

5 1/4" Double-sided 400K
single disk drive 40/80 track
switchable. Powers from the
BBC computer



**PHONE FOR
SPECIAL PRICES
0224-571735**

How to Order

Orders by post welcomed: please mail
coupon with payment.
Telephone orders welcome call 0224-
571735.

We also welcome Government and
Educational orders.

All products supplied include our own 12
months guarantee backed by our own
service centre staffed by fully qualified
engineers. Order with confidence. 7 days
money back guarantee.

All charges include VAT and carriage
charges by courier. Dealer enquiries and
personal callers welcome.

The right is reserved to alter prices without
prior notice.
All items subject to availability. E&OE.

MAIL ORDER

To: M&M COMPUTERS, Bon-Accord House, 41 Albert Street Aberdeen AB1
1XU

Please send me.....

☐ I enclose a cheque for £..... payable to M&M COMPUTERS.

☐ Please debit my Access/Visa/American Express Account

No..... Signed.....

Name..... Address.....

DISCS

**AT LOW PRICES
IN PLASTIC LIBRARY CASES**

5 1/4"	10	3 1/2"	10
DSSD	£7.99	SS 135tpi	£15.95
DSDD	£9.99	DS 135tpi	£19.95

BULK DISCS AT CRAZY PRICES

5 1/4"	25	100	250
DS 96tpi	£14.99	£49.99	£119.99
3 1/2"	25	100	250
DS 135tpi	£39.99	£149.99	£369.99

All disks come with envelopes, write protect labels and a lifetime guarantee

Epson LX86	£229.99
BBC Master 128K	£429.95
BBC Master econet terminal	£369.95
Acorn 512 upgrade kit	£399.95
Epson LQ800	£529.95
Amstrad 8256	£419.95
Mitsubishi 1404 monitor	£229.95

(all monitors and printers come with cables for BBC)

All prices include VAT and P&P.

Please call for bulk and education prices

Centec Electronic Systems Ltd


47 SPUR ROAD, ORPINGTON, KENT BR6 0QT

Tel: 0689 35353



SL Breadboard Interfaces

Provides connection between BBC interface and a breadboard
Ideal for prototype development
Each pin clearly labelled
by pin no. and function



Custom Service

Send details for quote.

Quantity
Discounts
Arranged

RS423 Port	£ 9.50
User Port	£13.50
Printer Port	£13.50
Analogue Port	£13.50
1MHz Bus	£17.50

Prices Fully Inclusive

SL Sideways RAM Module	£18.95 (+£4 for Battery Backing)
SL Soft-Key Label Books	£3 Pads £1.50
SL Volume Control for BBC	£4.50

SL Versatile Interface

Connects to 1MHz bus. Fully buffered and decoded.
Address selectable in FRED or JIM in blocks of 32 bytes.
Individual selection of IRQ, NMI or no int. to each VIA.
2x6522 provides: 40 I/O lines equivalent to 4 user ports.
4 programmer timers. 14 interrupt sources.
2 shift registers giving 2 serial ports.
Just requires 5V supply from computer or external source.
Up to 16 of these boards may be connected to one computer.
(with multi-way cable - send for details.)

Fully inclusive price only £49.50

SL Peripherals

19b Hammelton Road, Bromley, Kent. BR1 3PZ

Real Correspondence Quality Printer

PRICE BREAKTHROUGH

QUENDATA DWP 1120 DAISYWHEEL PRINTER

A HOST OF USEFUL FEATURES INCLUDE:-

- Standard parallel/centronics interface
- 20 c.p.s. (approx 200 words/minute)
- Easily obtained Qume ribbons
- Uses Qume daisywheels (many typefaces available)
- 10, 12 and 15 pitch options
- Maximum paper width 13 inches
- 3 levels of hammer impression
- Comes complete with power lead, plug, ribbon, courier 10 wheel, manual and cover
- Tractor and cut sheet feeder available

TRADE PRICE £178.25 INC. VAT. REC. RETAIL PRICE £299.00.

OUR PRICE £199. NOW £149.00

Inclusive of VAT
Delivery by courier (U.K. mainland only) £8

ORDER NOW WHILE STOCKS LAST

Free to callers only (with printer purchase) View printer driver.

All major credit cards accepted.

Telephone orders: Gerrards Cross (0753) 889010

SOFTSHOP LTD

55 ST. PETERS COURT, CHALFONT ST. PETER, BUCKS SL9 9QQ

AA119

STOP PLAYING GAMES

Use your computer to make money. Turn your hobby into a home-based income. Full and part time opportunities to cash in on this tremendous market. High earnings easily possible. Open to any amateur micro user and gamer. Write for free details.

WESTLINK PROMOTIONS (CS1),
108 George Street,
Edinburgh EH2 4LH


(74)

STARCAD

A PRECISION TECHNICAL DRAUGHTING PACKAGE FOR THE BBC MICRO

Features include:

- Scaled drawing construction. 1/10mm units
- 'In-Zoom' or 'Out-Zoom'
- On screen menus. Helpful command prompts
- Highest resolution MODE 0 throughout
- User Definable Grid sizes
- Rubberband, Drag, Copy, Rotate, Mirror, Enlarge
- Reposition or erase any part of a drawing
- 2 or 3 point arc/circles + centre generation
- Cursor 'Snap' to any part of current layer
- Intersection and Mid-points
- Text of any size and orientation
- Visual display of library and archive discs
- plus many more features which lack of space prevents us from listing



BBC Model B (OS 1.2) or B+/Master/M.Tur/6502 40/80 Track 5.25" disc drive
PLOTTERS Linear Graphics (A4M/A3M), Graphtec - Watanabe (please state model)
PRINTER Screen dump Epson compatible (included with each STARCAD program)
STARCAD Disc + Rom and Reference manual - £69 **STARDRAW** Plotter Driver - £19
 Cheques to:-

DESIGN SOFTWARE SYSTEMS

7 Shannon Centre, Thames Estuary Industrial Estate, Canvey Island, Essex SS8 0PE
 AA286

CAREY ELECTRONICS

computing and communications

For The BBC MICRO & MASTER SERIES
 Computers - Peripherals - Software

THE ACORN BBC MASTER SERIES'

Master '128'	479.00
Master 'Turbo'	619.00
Master '512'	895.00
Master 'Scientific'	P.O.A.
Master 'ET' Econet Terminal	399.00
6502 Second Processor	199.00
Z80 Second Processor	399.00
Acorn 'Prestel' Adaptor	only 129.00
Acorn 'Teletext' Adaptor	149.00
Acorn 'IEEE 488' Interface	325.00

ALL SOLIDISK PRODUCTS AVAILABLE

Acorn 1770 DFS	49.95
Acorn ADFS ROM	29.99
Acorn 'Turbo' Co-Processor	125.00
A.T.P.L. 'Sidewise' ROM Board	43.70
GrapPad II	from 59.50
A.M.X. Mouse	from 49.95
MONITORS (14" R.G.B.) & (12" Mono):	
Microvitec	from 249.00
Philips CF1114 (monitor/T.V.)	209.95
Philips BM7502 (12" Green)	92.95

We supply all ACORN and ACORNSOFT products plus Monitors, Disk Drives, Printers, Plotters, Modems, Light Pens, AMX Mouse

THE ACORN BBC 'MASTER SERIES' - IN STOCK 'Model B' Taken in Part Exchange

DISK DRIVES by - CUMANA - OPUS - PACE - U.F.D.

BABT approved MODEMS by - MIRACLE TECHNOLOGY - PACE - TANDATA

UFD DISK DRIVES:

UFD MD 400 A	(Single D/S 400K without PSU)	129.95
UFD MD 400 B	(Single D/S 400K with PSU)	154.95
UFD MD 802 E	(Dual D/S 800K with PSU Stacked)	299.95
UFD MD 802 DM	(Dual D/S 800K with PSU 'Master' version)	324.95

• All drives include cables, formatting disk & instructions •

UFD WINCHESTER DISC DRIVES:

HD 2000 (20MB)	799.95	HD 4000 (40MB)	1299.95
Including PSU, Winchester Controller Card & BBC Host Adaptor Card			
ARCHIVE	(10MB Tape Streamer & 1MB Floppy, for use with HD drives)		999.95
NUCLEUS 20 (20MB)	1799.95	NUCLEUS 40 (40MB)	2299.95

Also including 10MB Tape Streamer & 1MB 40/80 Track Floppy Disk Drive

It's AFTER the SALE, that SERVICE counts!!

Prices correct at time of publication and include V.A.T. at 15%

7 Church Road, WALTON-ON-NAZE, Essex. CO14 8DF
 Tel: Frinton-on-Sea (02556) 6993 (9am to 9pm)

EPROM PROGRAMMER

- Programs popular 2764 and 27128 EPROMs
- Connects to Commodore 64, Commodore 128, or BBC micro (32K+) with appropriate lead supplied
- Fully automatic operation with "SAFE" indicator LED
- Software includes program, verify, check erasure etc.
- Full self-contained: no batteries or mains connection required
- Functional single-board design.

PRICES:

Sabre EPROM programmer for £39.93
 C64/C128/BBC inc. lead and software

Software normally supplied on cassette with instructions on copying, but disk version available for extra £1.

Please allow 21 days for delivery.
 No Credit Cards please.

Tel: Derby (0332) 381657

All prices fully inclusive. Send cheque/PO to:

SABRE TECHNOLOGY AND SOFTWARE
 St Peter's House, Gower Street,
 Derby DE1 1SB

Reach For The Sky

with GLIDER PILOT 2, our comprehensive flight simulator. Features cable launch, thermals, cross country with map and practice option. Extensively machine coded for quick response. Instruction booklet.

With full instrumentation and "solid" colour perspective graphics, this is not a game but an accurate and challenging simulation. Keys or potentiometer joystick. Find the thermals and soar!!

FREE to disc users - "NOTEBOOK" - an easy to use memopad utility. Use it as a flight log for Glider Pilot 2!

B, B+ and MASTER.

Cassette £7.95, 5 1/4" Disc £8.95, 3" Disc £11.50.

APEX Software, Station Road, Penshaw, Tyne & Wear DH4 7PE. Tel: Durham (0385) 853091.

DISC DRIVE PROBLEMS?

Read/Write errors? Corrupted Data?

Perhaps it is time you had your disc drives checked.

FRC ELECTRONICS specialise in the alignment and repair of all makes and models of floppy disc drives (3 1/2", 5 1/4" and 8").


For a fast and efficient service at competitive prices call us on Reading (0734) 479550 or write to us at

FRC ELECTRONICS LTD.,
 52 Queensway, Caversham Park Village,
 Reading, Berkshire. RG4 0SJ.

Top software at bottom prices

	R.R.P.	Our Price
THRUST (Superior) Micro User gave this game 10/10 "Overall"	£11.95	£9.50 disc
	£7.95	£5.95 tape
SPEECH! (Superior) "speaks" your W/P or text files on any BBC computer	£11.95	£9.50 disc
	£9.95	£7.20 tape
STUDIO 8 (Beebug) a complete music system. "Excellent value" A&B Computing	£22.00	£17.50 disc
ADVANCED DISC TOOLKIT (A.C.P.) a classic. 30 commands. Backs up most locked cassettes	£34.50	£29.95 eprom
ADVANCED DISC INVESTIGATOR (A.C.P.) "the best product of its kind I have ever seen." A&B Computing.	£28.75	£24.75 eprom
INFORM (C.J.E.) lets S/W RAM users access lists, textfiles etc., without disturbing current program. Ingenious and versatile.	£20.00	£16.50 disc

Prices include VAT & Postage



All our packages are BBC B/B+/MASTER 128 compatible
Disks are 40/80T 5.25".
Send your requirements stating:
Program required, Disc/Tape/Eprom, Type of computer,
Your Name and Address (& Phone Number in case of queries).
Enclose a cheque/postal order to PILLARBOX SOFTWARE,
and send it to:

Pillarbox Software

11 Ravenscroft Park, Barnet, Herts. EN5 4ND.

MASTERcopy

...the selective copier you need for the BBC MASTER computer...
Dramatically reduces the time taken to copy unprotected discs,
DFS to ADFS, ADFS to DFS, DFS to DFS, ADFS to ADFS
using one or two, single- or double-sided drives.

An 84K RAM buffer enables many files to be copied in one pass with the minimum of disc swapping, and directories are created automatically as required. Files of any length are handled.

Supplied on disc, MASTERcopy runs from sideways RAM and is invoked with a * command. The program re-installs itself in sideways RAM when copying is done, ready for later use.

The ROM image supplied can be used to blow your own EPROM too, for use in the MASTER's cartridge slots.

Typical time to copy all 31 files DFS to ADFS is under 2 minutes!
£12.95 on disc - £14.95 for ROM version (including postage etc.)

For the Model B and Master:

DESIGN 7 - the best Mode 7 designer on the market. Design any screen quickly and easily, from simple menus up to full viewdata-standard screens. Saves screens as automatically-numbered files (for screen dumps etc.), or will convert them to BASIC for use in your own programs. Hundreds in use. Only £8.95 incl. p&p.

DESFAX - a teletext emulator - now you can run your own videotex system with pages you design yourself. Up to 200 pages stored on an 80 track disc, or 100 on a 40 track. Incorporates a powerful carousel facility with animation effects. Built-in graphics dump. Beats all of the other 'FAX' systems for ease of use and versatility. Supplied on 2 discs, £24.00 incl. p&p.

Please indicate whether 40 or 80 track discs are required.

ECONET versions of DESIGN 7 and DESFAX are available.

For further details of these products please ring 091-263 4026
Enquiries, cheques or P.O.s to

M/B Software

4 Arden Close, Hadrian Park, Wallsend, Tyne & Wear
NE28 9YB

AA278



Does your BBC have a one track mind?

**True multi-tasking will
put you out of your misery!**

Your BBC now has the true multi-tasking potential of much bigger machines.
CMS Soft have cracked it!
This module, packaged as a ready-to-fit sideways ROM, brings you a robust system that holds its own in the most demanding industrial and laboratory conditions.

And there is no interference with normal BASIC functions; Multi-Basic enhances the power, speed and readability of the best BASIC Interpreter there is.

£39⁹⁵ incl. p+p

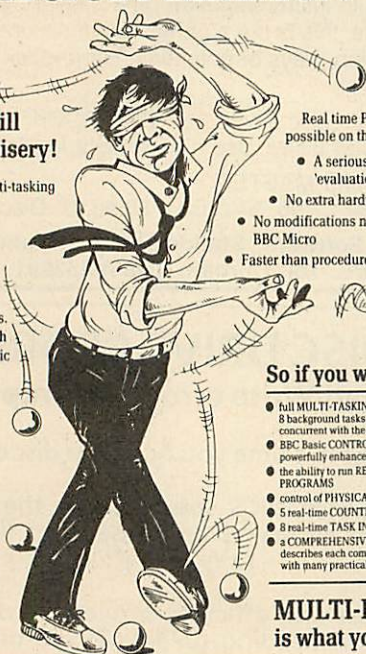

Real time Programs now possible on the BBC Micro.

- A serious tool - not an 'evaluation package'
- No extra hardware required
- No modifications needed to your BBC Micro
- Faster than procedure driven tasks

So if you want:

- full MULTI-TASKING with up to 8 background tasks running concurrent with the main program
- BBC Basic CONTROL FEATURES powerfully enhanced
- the ability to run REAL TIME PROGRAMS
- control of PHYSICAL INPUT/OUTPUT
- 5 real-time COUNTER/TIMERS
- 8 real-time TASK INTERVAL TIMERS
- a COMPREHENSIVE MANUAL that describes each command in detail, with many practical examples

**MULTI-BASIC
is what you need**



**MULTI
BASIC**

CMS Soft Limited.
Unit 18, Industrial Estate
Chelmsford Road, Great Dunmow
Essex CM6 1XG
Telephone (0223) 324141

CMS SOFT



INSTAT

- Powerful but easy to use
- Interactive data analysis
- Simple command language

THE MOST POWERFUL STATISTICS PACKAGE YET WRITTEN FOR THE BBC MICRO

INSTAT is a general purpose statistics package with over 70 commands for interactive data analysis. many commands have optional subcommands for greater flexibility.

INSTAT has been written by statisticians for use in data analysis in any area of application. It is also ideal for teaching statistics.

Facilities include:

- * Easy data entry and editing
- * calculations and data transformations
- * interactive multiple regression
- * analysis of variance for balanced design
- * multiway tables
- * comprehensive 'on line' help
- * descriptive statistics
- * powerful plotting
- * random sample generation
- * macros
- * probability distributions
- *and much more.....

INSTAT operates on the BBC B, B+ and Master.

maximum Data Space: approximately 10,000 to 30,000 numbers, depending on the machine.


The INSTAT package consists of a disc, 16K EPROM, Introductory Guide (150pp) and Reference Guide (95pp).

Price: £85 + VAT (includes postage and packing).
Educational and multiple copy discounts.

For further details: Alison Ansell, Statistical Services Centre,
Department of Applied Statistics, University of Reading,
Reading, RG6 2AN
Tel: 0734 875123 x 460 and 0734 861239 (24hr)

NEW

LOW COST XYZ TABLES

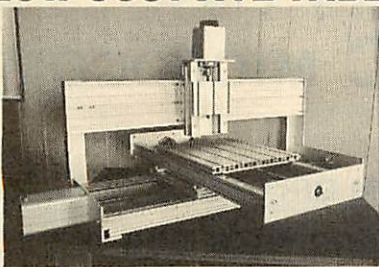

250 x 400 x 80mm TRAVEL
XYZ assembly with 3 stepper motors and screw drives £936 + VAT
Industrial version with ball screws £1,356 + VAT
Stepper motor drive rack with interface for RS 232 £1,085 + VAT
LEEWOOD DEVELOPMENTS LTD
UPTON, CAMBS.
Tel (0480) 890860 (24 Hr)

EPROMS, DISC, PAPER ETC ETC FAST DELIVERY - ALL ITEMS EX STOCK FOR NEXT DAY DELIVERY PHONE THROUGH YOUR ORDER BY 3PM

27256 250 NS EPROM	1-9	4.75	10+	4.00
27128 250 NS EPROM	1-9	2.95	10+	2.60
2764 250 NS EPROM	1-9	2.50	10+	2.30
6264LP-15	1-9	3.25	10+	2.75
41256-15	1-9	3.00	10+	2.75

80 TR DS/DD 96 tpi. Box of 10 9.95
Hub ring, sleeves & labels

POSTAGE ROMS ETC 75P DISCS £1

ALL PRICES INCLUDE VAT @ 15%

DEALER, LEA & GOV. ORDERS WELCOME

PRICES SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

GRIFFEN COMPUTERS 0279 812295

11 CASTLE WALK, LOWER STREET, STANSTEAD, ESSEX. CM24 8LP

The System utility from KM Software Ltd

Extra commands for BBC B & Master users, Master features include CMOS editor, CHARSET to move the character set into private ram, PVIEW private ram editor.

For the BBC B user it implements the MASTER rom handlers (INSERT/UNPLUG etc), disabled roms stay off even over a CTRL+BREAK.

Plus commands which can be used by both BBC B & MASTER, GPACK (powerful screen packer), Very powerful disassembler (6502, 65C12, I/O, tube, lables etc.), memory editors, Down loader creator, Bad Program recover, Mode designer, Tube editors, Formatter, Verifier etc.

Price £25.00

Also available KM'S Sound to Light converter, This chip contains 10 different screens with an amazing 63 colours and responds instantly to sound input to the cassette port. Just play your favourite music and watch the colours and patterns flow.

Price £12.50

Are you fed up with Zapping aliens why not try STRAT-AGEN a strategy game for two to four players using colourful graphics as pieces on a large 10 by 8 grid, with options to pass, short and even cheat (if you can find it ...)

5.25 inch disc (40/80 track format): £7.95

Tape: £4.95

Send orders to: KM Software Ltd., 39 Clos des Ormes, Rue Verte, St. Lawrence, Jersey C.I.



COMPUTER SERVICING

(established since 1979)

WE REPAIR - ON THE PREMISES - QUICK TURNROUND

- ☆ AMSTRAD & TORCH (APPROVED SERVICE CENTRE)
- ☆ BBC & ELECTRON (APPROVED SERVICE CENTRE)
- ☆ COMMODORE & SPECTRUM
- ☆ DISC DRIVES, PRINTERS, MONITORS
- ☆ HARDWARE HIRE - MINIMUM 10 DAYS

MAIL ORDERS by phone Access and Visa Accepted

A Range of Hardware, Software, Joysticks, Leads, Interfaces Chips etc, and Computer Paper always in stock

CROYDON COMPUTER CENTRE

29 BRIGSTOCK ROAD, THORNTON HEATH, SURREY CR4 7JJ. Tel 01-683 2646

**THIS NOTICE WORTH £2
AGAINST ANY PURCHASE OF HARDWARE OR SOFTWARE OVER £20**

AA90

IDEAL FORM FINDER FOR FIXED ODDS FANS

UNIQUE PROBABILITY THEORY TESTED POOLS PREDICTOR

60%

ACCURACY
POSSIBLE

For the BBC and Electron. Cassettes only. Cheques/P.O.'s payable to:
ALLAN DATA, (AU) 1 Lorn Road,
Dunbeg, Connel, Argyll. PA37 1QB.

**£7.95
INC
P&P + VAT**

FOR
BBC MICRO

SIDEWAYS.RAM.

- 8K CMOS RAM HM6264LP-15
- ★ 12 pcs £2.80 ★ 3+pcs £2.60 ★

- CMOS SIDEWAYS RAM MODULES
- No soldering required (clip provided).
- Fitting instructions.
- For sideways ram socket.

★ Prices: 8k £4.00, 16k £12.00, 32k £17.00 ★

- SIDEWAYS RAM UTILITIES

- Menu driven software: ram load/save/test & ram list.
- Printer buffer.
- 12 Page instruction book.
- Programmers aids with 24 utilities, including a full-screen-memory-editor, string search, speed, rsave, verify, vars, vectors, status, ron, roff, rstatus, retrieve (program recovery), move & pack facilities
- State 8K or 16K version.
- Supplied on 40/80T disk.

★ £4 on own or £2 with module ★

- ★ For write protect switch add £2 ★

- ★ INTRODUCTION OFFER ★

8K module with software £5 (ideal printer buffer)

P&P and VAT
included in prices.
Cheques / Po accepted.

BRAINSOFT Middle Huish
Instow Nr Bideford
N.Devon EX39 4LT.

Educational
Discounts.

COMIC NELPCO

DIRECT PROGRAM GENERATOR NO PROGRAMMING SKILLS REQUIRED

Write your own display programs directly on the screen. Run them, edit them in real time. Produce sophisticated machine code software on disc for other users. Four colours, text in 28 lines with proportional spacing, graphics on 158 by 126 with drawing routines, almost two octaves of music, and four sounds, screen dump for hard copy, effective, easy to use.

- EDUCATION generate hours of teaching material, on one disc
- BUSINESS program displays for information and advertising
- PLEASURE create books, comic strips, pictures, and music

Enquiries and orders to: The General Manager, NELPCO

North East London Polytechnic, Romford Road, Stratford,

London E15 4LZ. Telephone: 01-590 7722 ext 4181.

For BBCB £25 on disc Licence/Trade enquiries welcome.



PROTECT YOUR BBC MICROCOMPUTER

FROM DIRT AND SPILLS INTO THE
KEYBOARD WITH OUR VIZIFLEX SEELS

- Eliminate a costly cleaning process
- Self adhesive areas for easy, quick attachment
- Invisible for normal readability
- Minimal interference when typing


ALSO FOR KEYBOARDS OTHER THAN BBC
WE HOLD A COMPREHENSIVE RANGE OF
VIZIFLEX SEELS IN STOCK

CERATECH Electronics Limited

AUTHORISED DISTRIBUTOR

Lenten House, 20 Lenten Street, Alton,
Hants. GU34 1HG

Tel 0420 85470
Telex 858509 CERAT G. Fax 0420 83545

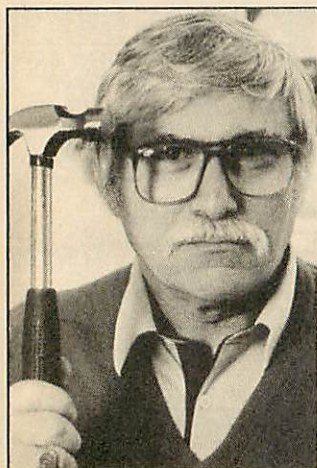

Snapper King turns nasty!

We advertised some months ago that our Harold had broken 2000 on Snapper and that he was going for 3000. Well he is still some 800 short of the target - and he's not very pleased about it. If you visit our shop to see our wide range of BBC hardware and software, just don't mention anything about Snapper. Look at our printers, keyboards and books by all means, but remember, Harold keeps the hammer behind the counter!

NUMBER ONE IN BROMLEY

Data Store

6 Chatterton Road, Bromley, Kent. 460 8991

AA53

A New Concept in Software

Letters, Notes, Reports,
Articles, Books,
Ease creative writing with

BBC

SCRATCHPAD

BBC

The ideas organiser
for creative writers

Organise your thoughts and make the ideas flow

- * A suite of programs based on scientific knowledge about our thought processes
- * Written by an established author
- * Icon driven
- * Fully tube compatible
- * Spool to your word processor files
- * Completely user-friendly
- * Single or double disk drives

SCRATCHPAD makes writing so much easier - all you have to do is add the words. "Certainly a clever idea . . . beats my sheets of A4" (Mirco User, Jan '86). "Well organised utility . . . valuable to writers . . . very useful indeed"

(Acorn User, June '86)

Price £24.95 (incl p&p)

INNOVATIVE SOFTWARE (AU)

41 Walter Road, Swansea

AA231

S P I D E R 2 REAL-TIME CONTROL FOR THE BBC MICRO

Watch the SPIDER!

- * Powerful new BASIC commands for invoking PROCs from the User Port, Serial Port or the Keyboard.
- * 8 independent countdown timers.
- * Easy to install with no soldering.
- * Comprehensive manual supplied.

New SPIDER 2 features

- * Special keywords for controlling the Serial Port.
- * Professional implementation of Foreground/Background processing.
- * Reaction timing and pulse trains accurate to 0.1 milliseconds!

from £65 including VAT

SPIDER 2 is a RAM/ROM combination which uses none of the BBC's memory, so BASIC programs are unaffected. The BBC B+ is fully supported and we supply a complete range of digital, analogue and serial interfaces for use with SPIDER using the 1MHz bus. Ask now for details.

Paul Fray Ltd

Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529

**NOW AVAILABLE
FOR BBC MASTER**


AA211

CARE ELECTRONICS



OPEN
9am-5pm Mon-Thu
9am-4pm Fri-Sat

800 ST ALBANS ROAD,
GARSTON, WATFORD,
HERTS. WD2 6NL.
Tel: 0923 672102



**NEW PRODUCT
AVAILABLE**
**MASTER EPROM
PROGRAMMER @ £57.50c**

MASTER SERIES CORNER CARTRIDGES FOR MASTER SERIES

Coming Soon!
Non Volatile Battery backed 32K RAM Cartridge

CARE MASTER ROM EXTENDER

Designed to enable owners of CARE or Viglen BBC Model B Cartridges, to now use them on the master series micros. The extender is capable of taking one 8K, 16K or 32K Eprom Cartridge.

CARE MASTER ROM CARTRIDGES

Designed by CARE Electronics to Acorn Specifications. Capable of taking up to 2x16K EPROMS (Inc Interword). CARE Master cartridge offer three options for maximum user flexibility.

- Option 1: Standard Cartridge with two 28pin I.C. sockets.
- Option 2: Single Zif version with one 28pin Zif and one 28pin I.C. sockets.
- Option 3: Dual Zif version with two 28 pin Zif sockets.

MASTER EPROM PROGRAMMER

All hardware and software contained within a CARE master cartridge. Ready to plug into either of your ROM slots. (No wires, no need to open master). Capable of programming 8,16,32 and 64K EPROMS. Quality software by Morley Electronics. Quality hardware by CARE Electronics.

Master 128K Micro	£460.00a
Reference Manual I	No VAT @ £ 15.00c
Reference Manual II	No VAT @ £ 15.00c
Master EPROM Programmer (Special Offer Price)	£ 57.50c
CARE Master ROM Extender	£ 9.20c
CARE BBC Model B Cartridges	£ 2.30c
Acorn Master ROM Cartridge	£ 14.95c
CARE Master ROM Cartridge	£ 11.50c
ZIF Socket Versions	
CARE Master ROM Cartridge (1xZif)	£ 17.25c
CARE Master ROM Cartridge (2xZif)	£ 21.85c
Master Monitor Stand	£ 16.56d
Master Monitor Stand with 5.25" Disc Housing	£ 32.20b
Master Monitor Stand with 3.5" Disc Housing	£ 32.20b

DOT MATRIX PRINTERS

Kaga Taxan 810 with NLQ	£253.00a
Kaga Taxan 910 with NLQ	£419.75a
Printer Cable (BBC to Centronic) 1mt	£ 6.90c
Printer Cable (BBC to Centronic) 1.5mt	£ 8.05c
Ribbon Hi-Sec KP-R	£ 6.90c
Printer Stand	£ 16.56d

FLOPPY DISCS

3.5" D/S D/D (each)	£ 2.76c
3.5" D/S D/D (per 10)	£ 25.30c
5.25" S/S D/D (per 10)	£ 12.65c
5.25" D/S D/D (per 10)	£ 13.80c
5.25" Disc Storage Box Lockable	£ 11.50c

SEMICONDUCTORS

SN74LS10N	£ 0.28c
SN74LS123N	£ 0.92c
SN74LS393N	£ 1.15c
C/Mos 4013	£ 0.46c
C/Mos 4020	£ 0.69c
P8271 Floppy disc controller	£ 40.25c
Eprom 2764 250n/s 8K	£ 2.53c
Eprom 27128 250n/s 16K	£ 3.45c
Acorn DNFS Interface kit	£ 69.00c
Plus wide range of other Semiconductors	

MONITORS (Price incl lead)

Philips Monitors	
BM7502 Green Hi-Res	£ 89.70a
BM7522 Amber Hi-Res	£ 92.00a
CM8533 Colour Med-Res	£289.80a
Hantarex Monitors	
HX-12 Green Hi-Res	£ 79.50a
CT9000 Colour Med-Res	£199.50a

TV/MONITORS (Price incl lead)

Philips CF1114 14"	£180.55a
Philips CT2016 16"	£276.00a
Philips CT2216 16" Remote	£310.50a

POWER SUPPLIES

For Use With Disc Drives	
Single BBC Outlet	£ 28.75b
Dual BBC or D/D Outlets	£ 29.90b
For use with most peripherals	
Quad BBC Outlets	£ 36.80b

RGB CONVERSION

Philips/Pye & Ferguson TX	
Conversion Kit (D.I.Y.)	£46.00d
Factory Conversion	£69.00a

CONNECTORS

BBC Power Plug 6way (INC CRIMPS)	£ 0.92c
BBC Power skt 6way (INC CRIMPS)	£ 0.92c
Card edge 34way	£ 2.53c
Centronics 34way	£ 4.60c
Disc Drive plug 4way (INC CRIMPS)	£ 0.82c
Disc Drive skt 4way (INC CRIMPS)	£ 0.82c
Domino plug 5way RS423	£ 0.46c
Domino skt 5way RS423	£ 0.46c
DIN plug 5way Econet	£ 0.36c
DIN plug 6way RGB	£ 0.36c
DIN skt 6way RGB	£ 0.36c
DIN plug 7way Ferguson/Hitachi	£ 0.36c
DIP Header IDC plug 28way	£ 1.38c
Scart plug (Euro) (INC CRIMPS)	£ 1.38c
Zif Socket 28way	£ 5.75c
Plus wide range of IDC and other connectors	

VARIOUS CABLE

6way screened cable (price per metre)	£ 0.69c
15way screened cable (price per metre)	£ 1.84c
20way ribbon cable (price per metre)	£ 0.69c
26way ribbon cable (price per metre)	£ 0.92c
34way ribbon cable (price per metre)	£ 1.15c

READYMADE LEADS

Centronics to Centronics 1.5mt	£11.50c
Disc Drive Data (Single) 1.2mt	£ 5.75c
Disc Drive Data (Dual) 1.5mt	£ 8.05c
Disc Drive Power (Single) 1.2mt	£ 3.45c
Disc Drive Power (Dual) 1.5mt	£ 4.60c
Phono to BNC	£ 4.60c
Phono to Phono	£ 2.99c
Phono to UHF	£ 2.60c
RGB 6-6 pin DIN 1.2mt	£ 3.45c
RGB 6-7 pin DIN (Hitachi) 1.2mt	£ 4.60c
RGB 6-7 pin DIN (Ferguson) 1.2mt	£ 4.60c
RGB 6 pin to SCART (Euro) 1.2mt	£ 8.05c
User Port Extension skt to Plug 0.5mt	£ 9.20c
1MZ Bus Extension skt to Plug 0.25mt	£10.35c
Many other types available please telephone or write for details.	

ROM EXPANSION BBC Model B & B+

The original and best selling.	
Low Profile System	£11.50d
Care BBC Model B Cartridge	£ 2.30c
Zif Socket Cartridge	£ 8.05c
Library Rack (Holds 6 Cart)	£ 1.84c

OTHERS: MORELY ELECTRONIC PRODUCTS

Teletext Adaptor inc Software on ROM	£99.36d
Teletext Adaptor inc Software on Disc	£98.90d
EPROM Programmer inc Software on Disc	£28.75d
EPROM Programmer inc Software on ROM	£29.21d
EPROM Programmer inc Software on Cart	£36.80d

SWITCHING UNITS

BBC Printer 2 to 1 (Inc Lead)	£34.50d
BBC Printer 6 to 1	£80.50d
Centronics 4 to 1	£80.50d
Printer 2 to 2 'CPX2 Fully Buffered'	£57.50b
User Port 2 way & Off Posn (Inc Lead)	£37.95d
User Port 6 way & Off Posn (Inc Lead)	£80.50d
RS423 2 to 1	£23.00d
RS232C 2 to 1 'T' (All lines)	£57.50d
RS232C 4 to 1 (All lines)	£80.50d
RS232C 2 to 2 'X' (8 lines)	£69.00d

SOFTWARE SECTION

The Computer Game.	
Trivial Pursuit 5.25" Disc Version	£19.95c
Trivial Pursuit Cassette Version	£14.95c
★ Over 3000 Questions of no vital importance!	
★ No typing is necessary.	
Without music, graphics and sound the board game has become the most popular in the world.	
Now it has them.	
MONOPOLY By Leisure 5.25" Disc	£14.95c
SCRABBLE By Genius 5.25" Disc	£14.95c

Wanted for Master Series
 Hardware & Software Designs
 Please contact above for details.


HOW TO ORDER: All prices inclusive of VAT.
 By Post. Enclose your cheque/P.O. made payable to:
 CARE Electronics. Or use your ACCESS/VISA.
 Please allow 7 days for delivery.
 Please add carriage.
 a = £9.99 b = £5.00 c = £1.00 d = £2.00



MIDWICH ARE PROUD TO ANNOUNCE

**NEW
3½" FLOPPY
DRIVE
FOR BBC
MICRO**

A BABY BROTHER FOR THE 5¼" DISC DRIVE

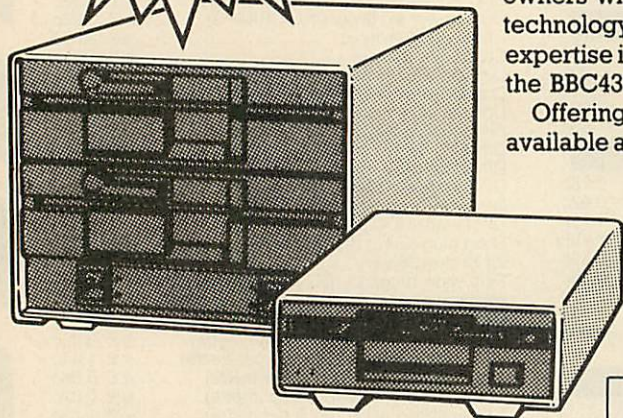

Since 1983 MIDWICH have supplied thousands of satisfied BBC Micro owners with a variety of 5¼" Floppy Disc Drives. Today's state-of-the-art technology drive mechanisms combined with MIDWICH's proven expertise in Disc Drive manufacture has culminated in our introduction of the BBC435 series of 3½" boxed disc drives.

Offering all the advantages of 3½" technology the BBC435 series are available as single or dual drives, with or without integral power supplies.

Fully compatible with all models of BBC Micro's the new baby of our family offers high performance with a minimum of power consumption. The Drives are 80 track double sided and can work in both double and single density operation giving up to 640K memory from a single drive.

SPECIAL INTRODUCTORY OFFER

BBC435	Single 3½" drive	£119.95
BBC435D	Dual 3½" drive	£217.95
BBC435DP	Dual 3½" drive with PSU	£242.95

All prices inc vat and carriage.



**MIDWICH
THAME
LTD.**

GILRAY ROAD, DISS,
NORFOLK, IP22 3EU

A member of the Memec (Memory and Electronic Components) PLC Group

**TELEPHONE:
0379 4131
RING US TODAY!**

VIDEO-TITLER II (for the BBC-B)

VIDEO-TITLER II is a sophisticated professional titling and caption-generator program with features that will impress both the pro and semi-pro video maker.

Features include:

- ★ 7 Large fonts (including Old English)
- ★ Proportional spacing & drop shadow
- ★ Text centering with optional under & overlining
- ★ Sub-titling in blue box background
- ★ Unlimited page saving and recall
- ★ Broadcast-style VTR starter clock (with personalised ident) showing programme duration, title & client
- ★ Use of all 16 colours in MODE 1 or 2
- ★ Program also ideal for slide making and A/V applications.

Supplied with full instructions, plus information on other aspects of BBC-B titling and colour video interfacing.

VIDEO-TITLER II is £15.75. Disc only. Please state 40 or 80 track when ordering. Available from:

**VISIONCRAFT SOFTWARE,
PO BOX 135, LONDON N20 0HF**

MILLENNIUM

The Two-Computer Strategy Game of Interstellar Empires

All is silent save the insistent tapping of keys. the unearthly light of the two screens gleam in the power-hungry eyes of the arch-rivals as they grapple to control their star-flung empires. There the populations steadily increase, rebellion and catastrophe strike: exploration must continue so that new colonies can be built, while out in the blackness of space the alien forces of the enemy could be anywhere, poised to attack.

"An excellent piece of software", A&B Computing Nov. '86.


1 or 2 Players / 1 or 2 Computers (linked via RS423)
3 Scenarios × 3 Victory Levels.
For BBC-B, BBC-B+ or MASTER.

Disc: £8.95. Disc & RS423 Cable: £12.95.
(State 40 or 80 track)

**FALCONSOFT,
PO Box 141, Welling,
Kent DA16 2EB.**

CYGNET ELECTRONICS

RAMWISE II

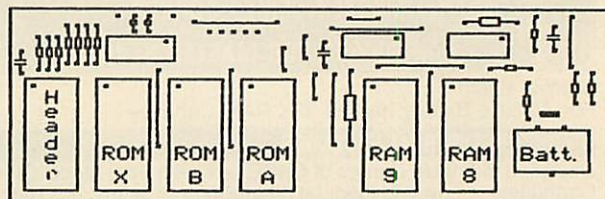

32K RAM-ROM Board

Only £38.95 inc.

Expand the capacity of your BBC micro to 32K of Sideways RAM. Plus TWO EXTRA ROM sockets.

This provides a total of 8 Sideways ROMs, 6 ROM sockets + 2 banks of 16K Sideways RAM.

- ★ Battery backup fitted
- ★ Write protect switch included
- ★ No soldering required
- ★ FREE utilities disc to save and load ROMs
- ★ *LOAD capability
- ★ RUNS all existing ROMs

RAMWISE 16K RAM Module

**STILL AVAILABLE AT A NEW LOW PRICE OF
£21.50 inc.**

- ★ Small module plugs directly into any spare ROM socket
- ★ Write protect switch included
- ★ Runs all existing ROMs
- ★ Already used in schools on ECONET and E-NET systems
- ★ ATPL ROM board compatible
- ★ FREE utilities disc to save and load ROMs

APPLY FOR QUANTITY DISCOUNTS

Post to: **Cygnnet Electronics, PO Box 27
Bordon, Hants. GU35 0HH
Tel: (04203) 5229**

AA271



MANCOMP LTD

(Dept AU) PRINTWORKS LANE, LEVENSHULME, MANCHESTER M19 3JP.

Tel 061-224 1888 or 061-224 9888

NOW AN AMSTRAD APPROVED SERVICE CENTRE!



APPOINTED WATFORD DEALER

Mancomp are now the main Northern Distributors for Watford Electronics and will be stocking all of Watford's popular range of hardware and software – all at Watford's prices.

Phone first for availability.

MANCOMP ARE MOVING

In line with our extensive expansion programme, we are moving to larger premises – with ample parking and only 2 minutes from the city centre.

Please call for details.

DISCS

Double-sided 96TPI

£7.50 for 10

Incl. **FREE** library case!

25 for £14.95

PRINT-AID

Printer Control Rom

ONLY £17.00

The Utility Rom to take the trouble out of getting the most out of your printer. (Specify Printer Type when ordering.)

MODEMS

B.T. Approved

Modem complete with software

£99.95

300, 1200 & Prestel Auto Dial

Modem alone – £89.95

Software – £39.95

**SPECIAL
PRINTER OFFER**
BROTHER M1009
£145.00 incl. VAT

All our prices include VAT Please add carriage
£5.50 for Printers & Drives £1.50 for other items

Many other Hardware and
Software items available

EXPRESS SPECTRUM, BBC, COMMODORE & AMSTRAD REPAIRS!

SEND S.A.E.
for price list
Trade enquiries welcome

FIRST-

To provide 'While-U-Wait' Service.

FIRST-

With International repairs and discounts for Schools, Hospitals and H.M. Forces.

FIRST-

To provide Insured/Recorded Delivery on return journey.

FIRST-

With **LOW CHARGES** (e.g. £9 for keyboard faults).

FIRST-

For **PROFESSIONALISM**... "Of all the repair companies 'Sinclair User' spoke to, **MANCOMP** seemed the most professional when it came to advice and a helpful attitude". AUGUST 1985.

FIRST-

For **SPEED**... "One firm, at least, can usually effect any necessary repair. Based in Manchester, **MANCOMP** can offer what is arguably the fastest turnaround in the business, to personal callers".

'CRASH' Magazine, JUNE 1985.

FIRST-

For **ADVICE & HELP**... "I have come across a firm that will be more than willing to advise you as to how to remedy your problem. They are called **MANCOMP** and as well as repairing faulty Spectrums, are also quite willing to discuss your problems with you, and offer reasonably cheap and (more importantly) **CORRECT** cures". Phil Rogers, 'POPULAR COMPUTING WEEKLY', JANUARY 1985.

FIRST-

For **LOW PRICES**... "My Spectrum blew recently. I took it to **MANCOMP**, who fixed it in 8 mins. and for less than £10. They are local, 'clued-up', and blindingly efficient!" COMPUTER COLUMN, '4 HEATONS DIGEST', (Vol. 1, No. 11.).

FIRST-

For **HONESTY**... Call in and watch your computer being tested and repaired. Our engineers don't disappear into a back room.

If there is nothing wrong, we will tell you!

FIRST-

For **REPUTATION**... We have a reputation built on 2½ years of successful Spectrum, BBC, Commodore, Apple and IBM repairs.

AMSTRAD REPAIRS
BETWEEN £14 and £55

SPECTRUM REPAIRS
BETWEEN £9 and £20

COMMODORE
REPAIRS BETWEEN
£14 and £35

BBC REPAIRS
BETWEEN £14 and £45

ESTIMATES GIVEN ON
PRINTERS/DISK DRIVES
ETC.

(Terms and conditions available on request)

MANCOMP GUARANTEE

If the same fault occurs within 90 days of our repair, we will repair it **FREE** of charge AND refund the postage.

*Terms and Conditions available on request



SPECIAL OFFERS

BBC MASTER 128 COMPUTER £380 + VAT = £437.00 (Carr. £8.00)
New BBC Master Compact – telephone for prices
Akhter UFD top quality Disk Drives – 40/80 Track switchable

– Complete with bound handbook and **FREE BBC Utilities Disk** and written **2 YEAR WARRANTY**, – Fantastic Value!

MD400A	Single	400k	No mains PSU	£121.90
MD400B	Single	400k	with PSU	£139.45
MD802C	Dual	800k	No mains PSU	£225.00 (carr. £4)
MD802E	Dual	800k	with PSU	£253.00
MD802DM	Dual	800k	in Monitor Stand	£274.00

Box of 10 DS/DD 40/80 disks – BANANA (Reversible) £9.95 + £1 p&p
FREE PEN WITH EVERY BOX OF BANANAS!

Cumana Disk Drives (New Design) TELEPHONE FOR LOW PRICES

NEW: Gemini SPELLMASTER – for BBC micros. A powerful **SPELLING CHECKER** with 50,000 word dictionary – for use with most BBC Word Processors. Use with Wordwise, View, etc. Launch Price: £19.95.

– Currently available on 80T disk. (Free delivery)

INTERWORD – The new wordprocessor of the WYSIWYG type. Allows 40, 80 and 106 column modes. (ROM) – Special price £48.95 delivered.

AMSTRAD PCW8256 £365 + VAT

PCW8512 £465 + VAT (FREE DELIVERY!)

Printer Bargains for Electron/BBC/Master

Mannesmann Tally MT80+ £186.00 (carr. £6)

NEW Amstrad DMP 3000 F/T (NLQ) £165.60

Taxan KP801 £251.85

Star NL-10 Fine NLQ printer, complete with **Tractor Feed** 5k buffer,

Automatic Single Sheet Feeder, Touch Controls and **Parallel**

Interface Cartridge – £239.00.

BBC Parallel Printer Cable – £8.25.

ALL PRICES INCLUDE VAT

TIGER SOFTWARE,
66 ST. MICHAELS LAND,
BRIDPORT, DORSET DT6 3RB.
Tel: 0308 27691

LARGEST COMPUTER CENTRE IN NORTH WEST UK

Home and Business Computers

Main Dealers for:

Acorn, Atari, Ferranti, Epson, Commodore (Amiga),
 Kaypro, Sanyo, Olivetti, Sperry.

*Also joysticks, books, disk drives, calculators, cables,
 monitors.*

Master dealers for Amstrad.

Large Showroom. Free delivery mainland UK for items £100 or over.

Personal export specialists.

ALL EXPORT ORDERS TESTED BEFORE DESPATCH



MIGHTY MICRO

NO ORDERS TOO SMALL

268 Wilmslow Road, Fallowfield, Manchester M14 6WL

Telephone: 061-224 8117

ICE-BOX

The utility

★ for Sideways RAM ★

- transfers nearly all tape software to disc
- "save game" to disc at any point
- freeze game, slow motion, single step at any point
- swap between concurrent activities
- change O.S. functions while programme running
- allows screen dumps without affecting current program
- works with any DFS or DDFS
- comprehensive user guide

Requires: BBC/B with O.S. 120
 disc drive and 16k sideways
 Ram

Supplied on disc in 40/80 track
 compatible format

Orders to: **EVENT ONE LTD.**
 PO BOX 17 Malvern, Worcs.,
 WR14 1PP

Price:
£18 (inc vat, p&p)

FREE



First ever **"MIDI, MICROS & MUSIC"** book with all you need to know about using your home computer and MIDI instruments to make music – from creating sounds, composing and recording to notation and even pictures to music!

Send or phone **TODAY** for your **FREE** MIDI book and you'll also receive full details plus **discount voucher** for **EMR MIDITRACK** – an unrivalled music system used in homes, schools and studios worldwide. Ten superb programmes plus new figures 32-part scorewriter for BBC B, B+ and Master Series. Complete systems from £99.00 inc Midi Interface.

ELECTROMUSIC RESEARCH LTD.,
 14 MOUNT CLOSE, WICKFORD,
 ESSEX SS11 8HG.

Telephone 0702 335747 anytime. AUB6

NEW! MASTER-ART for the BBC Master 128

Produce amazing full screen graphics with this exciting new Art program specifically written for the MASTER 128. A new, very easy to use graphic tool for the artistic and fun for everyone!

Features

- * Uses all 64k of sideways ram.
- * Circle, ellipse, line, rubber banding, spray, radial line, square, parallelogram, inverse, Gcol, text (three different sizes and angles)
- * VDU recorder – draw your pictures then watch them recreated
- * Colours 64 shades not including flashing colours
- * Input device; keyboard, AMX mouse or Marconi RB2 trackball
- * Easily create screens in Mode 2
- * Menu driven – Pop up windows
- * Scroll between screens in memory
- * Switch between shadow and normal screen
- * Copy and paste between screens
- * Animation * Clock * Print out facility
- * As used in educational projects

Double discs set 40 or 80 track DFS.

Please specify when ordering.

Send £25.00 inc. P&P to:

NUMBER 3 SOFTWARE

3 Dairy Farm Court


Attleborough, Norfolk NR17 2BT

BBC MICRO

RAM MODULES

for **TAPE, DISC & NETWORK** systems

- ★ Very easy to fit no soldering
- ★ Plugs into any sideways ROM socket
- ★ 32K occupies two sockets (2×16K banks)
- ★ Small size 35×18×14mm fully enclosed
- ★ Menu driven software, compatible with Basic I/II/Networks: Load/Save module with ROM image data; View ROM titles; Protected ROM option; OS Commands. Utilities: 15K printer buffer; View printer driver generator; Easy loader; Basic program to sideways ROM format.




16K £22

32K £35

Please state 40 or
 80 Track Disc/Tape

SWITCH BOXES

- ★ Complete with all cables & connectors
- ★ Robust plastic case, size 100×50×20mm
- ★ Quality push action changeover switch
- ★ Selection by colour indicator button
- ★ Printed circuit board construction
- ★ Ready to use just plug in



PS1 2 BBC'S TO 1 PRINTER £35

PS2 1 BBC TO 2 PRINTERS £38

Free P&P. Send Cheques/PO/Official Orders to:

TERRELL ELECTRONICS, 7b Essex Gardens,
 Hornchurch, Essex RM11 3EH. Tel: (04024) 71426

EDUCATIONAL
 DISCOUNTS

USER GROUPS

LONDON

London. Association of London Computer Clubs: Robin Bradbeer, Polytechnic of North London, Holloway, London N7 8DB

London. Association of Computer Clubs: Rupert Steele, 12 Philbeach Gardens, London SW5 9DY

London. Radio Amateur Micro User Group: Contact by bulletin board No 86300198

East London. SOBAT Computer Club: Mr T A Kayani, 12 Calderon Road, London E11 4EU Tel: 01-556 5423

North London. BBC Micro Users Group: Mr Ric Keyworth, 'The Penthouse', 4b Kilburn High Road, London NW6 5UL Tel: 01-734 9235

North London. North London BBC Micro User Group: 82 Hornsey Lane, London N6 5LU Tel: 01-263 6760 (eves)

Wandsworth. Wandsworth Computer Club: C Kendrick, Earlsfield Library, Magdalen Road, London SW16

West London. Personal Computer Club: Chris, Tel: 01-743 1579 Steve, Tel: 01-540 6271 Blue, Tel: 01-579 5415

SOUTH-EAST

Aylesbury. BBC Micro User Group: Aston Clinton County Combined School, Twichell Lane, Aston Clinton, Aylesbury, Bucks HP22 5JJ Tel: (0296)630276

Bognor Regis. Bognor Computer Group: E R Piper, 2 Ely Gardens, Aldwick Park, Bognor Regis, Sussex PO21 3RY

Bracknell. Bracknell Primary Schools Computing Users Group: D Donaldson, Wildridings County Junior School, Netherton, Bracknell, Berks RG12 4DX

Brighton, Hove & District. Brighton, Hove & District Computer Club: J Smith, 30 Leicester Villas, Hove, E. Sussex BN3 5SQ

Bucks. South Bucks Acorn Computer Club: David Park, 160 White Hill, Chesham, Bucks HP5 1AZ Tel: Chesham 783097

Camberley. Camberley Computer Users Club: David Crosby-Clarke Tel: Crowthorne 771590, Prestel mailbox 344771590

Carshalton. Acorn Atom User Club: Kevin Roll, 66 Shaldon Drive, Morden, Surrey Tel: 01-540 5282

Caterham. Computer Club: Caterham Leisure Centre, Godstone Road, Caterham, Surrey CR3 6RE

Dartford. CP/M User Group: Diana Fordred, 72 Mill Road, Hawley, Dartford Kent Tel: (0322) 22669

Guildford. West Surrey Computer Club: Jan Spencer, 52 Lindfield Gardens, Guildford, Surrey GU1 1TS Tel: (0483) 64512

Harpenden. Harpenden Microcomputer Group: P Crowley, 36 Southdown Road, Harpenden, Herts AL5 1PG

Harrow. Harrow Computer Group: Bazyle Butcher, 16 St Peter's Close, Bushey Heath, Watford WD2 3LG Tel: 01-950 7068

Ilford. ILBUG: Peter Jones, 1 De Vere Gardens, Cranbrook, Ilford, Essex IG1 3EB Tel: 01-554 9825

Iver. Iver Computer Society: John Haigh, 11 Colliston Walk, Ford's Farm, Calcot, Reading, Berks RG3 5ZJ Tel: (0734) 417534

North & Mid Essex. User Group (NAMEBUG): Andy Purkiss, 12 Palm Close, Witham, Essex Tel: (0376) 515609, Prestel: 376515609

Reading. Reading User Group (RUG): Richard Rowlands, Tel: Reading 596825 (eves)

South East Essex. BBC User Group (SEEBUG): Miss J Lines, 97 Oakhurst Drive, Wickford, Essex SS12 ONW Tel: (03744) 63396

Sutton. Sutton Library Computer Club: The Secretary, 21 Village Row, Sutton, Surrey SM2 6JZ Tel: 01-642 3102

Welling. Computer Users Club: Tony Latham, 69 Hadlow Road, Welling, Kent DA16 1AX

SOUTH & SOUTH-WEST

Alton. Alton Computer & Electronics Society: Kevin Weatherhead, Sheen, Old Odiham Road, Alton, Hants GU34 4BW Tel: Alton 87478

Bristol. Format 40/80 Club: BBC Disc User Group, Peter Hughes, 5 Marsh Street, Bristol BS1 4AA Tel: (0272) 799979

Fareham. Porchester & Fareham Computer Club: Simon Ward, 9a East Cams Close, Downend, Fareham, Hants PO16 8RP

Gosport. Borough of Gosport BBC Users Group (BOGBUG), Graham Dubber, 128 Wych Lane, Gosport, Hants PO13 0TE Tel: (0329) 282221 (evenings)

Radio. AMRAC (Amateur Radio and Computers): Mr T Triggell, Gleness, East Boldre, Brockenburst, Hants SO42 7WD Tel: (0590) 612130

MIDLANDS & ANGLIA

Boston. Boston Acorn Computer Users Club: J C Goodwin, 245 Church Green Road, Fishloft, Boston, Lincs PE21 0RP

Burton-on-Trent. Beeb Users' Group (Bug Club): Mrs Linda Yeomans, 13 Regent Street, Church Gresley, Burton-on-Trent, Staffs DE11 9PL Tel: (0283) 216445 (eves)

Cambridge. Bottisham Acorn User Group: Peter Rank, Tel: Cambridge 812080, or Gerald Wilcockson, 19 Gallows Hill, Saffron Walden, Essex CB11 4DA Tel: Saffron Walden 23793

Derby. The Derby Microcomputer Society: F Taylor, Secretary, c/o 5 Park View Close, Allestree, Derby DE3 2GH Tel: Derby 559334

Glossop. Glossop Computer Club (Derbyshire): T S Fox, 4 Park Lane, Little Hayfield, Stockport, Cheshire SK12 5NW Tel: (0663) 44260

Huntingdon. RAF Personal Computer Association: Sqn Ldr J A Upham, Man S (ADP), HQ RAFSC, RAF Brampton, Huntingdon PE18 8QL

Norwich. Amateur Computer Club: Andy Leeder, Church Farm, Stratton St Michael, Norwich NR15 2QB

Norwich. Norwich & District BBC Microcomputer User Group: Roy Street, Church Farmhouse, Themelthorpe, Dereham, Norfolk NR20 5PS Tel: Foulsham 579

Nottingham. Micro Club: John Day, 8 Warkton Close, Chilwell, Notts NG9 5FR Tel: (0602)225660. Pestel: 60225660

Redditch. Redditch Computer Club: Anthony Green, 14 Radway Close, Redditch, Worcs B98 8RZ Tel: (0527) 61434

Stoke. POTBUG BBC User Group: J Forrest, 50 Cliff Street, Smallthorne, Stoke-on-Trent, Staffs Tel: 818430

Stratford. Stratford Computer Club: Chris Parry, 15 Kipling Road, Stratford-on-Avon Tel: (0789) 68080

Suffolk. West Suffolk BBC Micro Users' Club: Antony Hurden, 14 Plovers Way, Bury St Edmunds, Suffolk IP33 2NJ

NORTH-WEST

Cheshire. Mid-Cheshire Computer Club: Michael Christie, 496 The High Street, Winsford, Cheshire

Cumbria. West Cumbria User Group: P Majid Tel: (0946) 62732 or K Purkiss, Tel: (0946) 66586

Liverpool. Mersey BBC User Group: Nik Kelly, 56 Queen's Drive, Liverpool L4 6SH

Rochdale. Rochdale BBC Micro User Group: c/o 6 Dunbar Grove, Darnhill Estate, Heywood, Lancs OL10 3QJ

Wirral. Wirral Micro Users Club: David Walsh, 28 Priory Close, Bebington, Wirral, Merseyside L63 3EG

NORTH-EAST

Huddersfield. Huddersfield BBC Micro User Group: S Gill, 21 Mayfair Avenue, Sowood, Halifax, W. Yorks Tel: (0422) 73058

Hull. Forum 80: 421 Endike Lane, Hull HU6 8AG

Hull. MUSE (for teachers): PO Box 43, 231/2 Friary Chambers, Whitefriargate, Hull HU1 2HD Tel: (0482) 20268

Keighly. Keighly Computer Club: Colin Price, 'Apple Garth', The Hob Hill, Steeton, Keighly, W Yorks Tel: (0535) 54738

Newcastle. Newcastle & Washington BBC User Group (NEWBUG): Gary Bowmaker, c/o Washington Town Centre Library, The Galleries, Washington, Tyne & Wear Tel: (0783) 813175 (eves)

Sheffield. Parsons Cross BBC User Group: Andrew Grant, 28 Rokeby Road, Sheffield S5 9FU Tel: (0742) 461203

S Yorks. South Yorks Personal Computer Group: Bob Hindle, 139 Penrhyn Road, Sheffield S11 8UP

Wakefield. Wakefield BBC Micro User Group: PO Box 65, Wakefield, West Yorkshire WF2 6YZ

SCOTLAND

Econet. User Group (Scotland): c/o Michael Ryan, Balkeerie Cottage, Eassie, by Forfar, Angus

Central Scotland. BBC User Group: D Davidson, 1 Roxburgh Place, Larbert, Stirlingshire FK5 4UE Tel: (0324) 558692

Inverclyde. Inverclyde BBC Micro Users Club: Robert Watt, 9 St John's Road, Gourcock, Renfrewshire PA19 1PL Tel: Gourcock 39967

WALES

Cardiff. Cardiff BBC Computer Club: Geoffrey Barker, 2 Whitcliffe Drive, Penarth CF6 2RY Tel: (0222) 701023

N. IRELAND

Belfast. Belfast Computer Club: Andrew White, 19 Greenpark Drive, Markethill, Co Armagh BT60 1PX

OVERSEAS

Australia. BBC Users Group of Canberra: PO Box E58, Queen Victoria Terrace, ACT 2600

Australia. Beebnet: M A Cowley, PO Box 262, Kingswood, South Australia 5062

Australia. Ozbeeb Sydney, meetings North Ryde, PO Box 1030, Parramatta 2150 Tel: day 635 4868, eve 868 4455

Australia. Dapto BBC User Group: PO Box 447, Dapto, NSW 2530

Canada. Atom Users Group of Canada: John Wood, 812 Cabot Trail, Milton Ontario L9Y 3M8

Canary Islands (Spain). BBC Micro Club Tenerife: PO Box 560, 3800 Santa Cruz de Tenerife

Eire. Irish Amateur Computer Club: Austin Vaughan, 35 Monastery Drive, Clondalkin, Dublin 22 Tel: 01-593112 (eves)

Eire. OIFIG (Official Irish Fourth Interest Group): c/o Hugh Dobbs, Newton School, Waterford

Finland. Arjen Raateland, Hopeatie 10A21, 00440 Helsinki 44

France. Club Informatique Assevent: Claude Laurent, 1 rue du Marechal Leclerc, Assevent 59600 Tel: (27) 652294

Greece. Microclub: C Mantazavinatos, 17 Stournara Str. 106 82 Athens

Hong Kong. Acorn Computer Users Society of Hong Kong: PO Box 13330, Central PO, Hong Kong

Malaysia. Sabah Computer User Group: c/o Albert Vun, PO Box 69, Kota Vun, Sabash, Malaysia

Malta. BBC Micro Users Club (Malbeeb): Ray C Zammit, 20 Oleander Avenue, Santa Lucia

Netherlands. Big Ben Club: J W Vuurpijl, Hein Baderstraat 36, 2171 XP Sassenheim

New Zealand. BBC/Acorn Computer User Group of NZ: PO Box 9592, Wellington

New Zealand. Christchurch BBC & Electron Users Group: Mrs Rebe Nolan, 87 Palmers Road, Christchurch 9

Norway. BBC INFO: Horten Ingenlorhogskole, Skippergt.6,3190 Horten

Norway. Scandinavian BBC User Group: Frans-Otto Hendriks, Ludvig Karstensvei 14, 1064 Oslo 10

Pakistan. BBC Users Group: Capt. Z A Kidvai Tel: Karachi 540986

South Africa. Acorn Atom Users Group: J G Dowling, 27 Oribi Avenue, Van Riebeeck Park, Kempton Park 1620

South Africa. Pretoria BBC Users Group: Stan Miller, PO Box 117, Montana 0151

South Africa. Tygerberg BBC User Group (Tygerbug): R P Donovan, 16 Bakker Street, Welgemoed, Bellville 7530

Sweden. Acorn User Society of Sweden: Tord Israelson, Toppa Klaras Vay 12, S-702 29, Orebro, Sweden

Sweden. BBC User Group: Anders Wichman, Folkungagatan 58, 11622 Stockholm

Tasmania. BBC Users Group (Tasbeeb): Box 25 PO, North Hobart 7002

SPECIAL INTEREST

Accounts. BEEBACC: Brian Pain, 40a High Street, Stony Stratford, Milton Keynes Tel: (0908) 564221

Adventure. International Adventure Club: Simon Martin Clarke, 10 Ennis Close, Harpenden, Herts AL5 1SS

Bulletin Boards. Forum 80:421 Endike Lane, Hull HU6 8AG

CP/M. CP/M User Group: Diana Fordred, 72 Mill Road, Hawley, Dartford, Kent Tel: (0322) 22669

Disc Users. Format 40/80 Club (BBC Disc User Group): Peter Hughes, 5 Marsh Street, Bristol BS1 4AA

Education. Micros and Primary Education (MAPE): c/o Mrs G Jones, 76 Sudbrooke Holme Drive, Sudbrooke, Lines LN2 2SF

Electronics. Alton Computers & Electronics Society: Kevin Weatherhead, Sheen, Old Odiham Road, Alton, Hants GU34 4BW Tel: Alton 87478

Heraldry Society. Colin Forrester, 5 Hook Road, Epsom, Surrey KT19 8TH

Logo. British Logo Users Group (BLUG): Richard Olney, c/o London Technology Network, 86-100 St Pancras Way, London WC1

Muse. PO Box 43, Houghton on the Hill, Leicester LE7 9GX Tel: (0533) 433839

"THE PICK OF THE BUNCH" 16K SIDEWAYS RAM

- Module uses low power CMOS RAM
- Internal decoupling capacitor for ultra-reliable data storage
- Write protect switch now supplied for trouble free operation
- Software provides full ROM load/save facilities
- Formats programs for the ROM Filing System
- RAM can be configured as a 15.5K printer buffer
- Excellent documentation
- A machine code patch allows Assembly language programmers to use the 65C02 instructions

Price: 16K RAM £24.85
Please specify 40 or 80 track disc when ordering. Educational discount given.

As an independent review put it . . .

"IFEL's manual is a pleasure to use . . . a massive 20 page booklet that goes into memory addressing, the sideways ROM system, as well as describe the software itself."

"The model with the most features at a reasonable price, and therefore the pick of the bunch, has to be IFEL's."

Beebug May 1986

Send cash with order/official order, or write for further details to:

IFEL, Dept. (AU)

36 Upland Drive, Derriford, Plymouth PL6 6BD

Telephone (0752) 787058



SAVE BEST PRICES IN UK? WHY PAY MORE!

MASTER 128K	£390 + VAT
MASTER COMPACT (TV system)	£384 + VAT
MASTER COMPACT (Mono system)	£454 + VAT
MASTER COMPACT (Colour system)	£584 + VAT

Plus EXTRA £10 Voucher off our already discounted printer prices

e.g. MicroP MP165 (Dot matrix printer 165 cps/75cps CQ)	£195 + VAT
STAR POWERTYPE (Daisywheel printer)	£195 + VAT
MINIMUM 10% off all printers (Canon, Citizen, Epson, Seikosha, Shinwa, Star)	
Plus MINIMUM 10% off all Acornsoft/Computer Concepts Rom's	
Plus AKHTER/CUMANA/PACE Disc drives at discount	
ATPL Sideways Rom Boards	£36 + VAT



Many others available all at discount - ask for a quote

Prices inc. P&P.
ADD 15% VAT

WILLOW SOFTWARE (AU2)
THE WILLOWS, WRINGTON LANE
CONGRESBURY, BRISTOL BS19 5BQ
Tel: (0934) 834056

AB COMPUTERS & ELECTRONICS LTD

★ BBC/ACORN SYSTEMS ★

MASTER 128	£433.91
COMPACT MONO SYSTEM	£467.69
COMPACT COL. SYSTEM	£597.69
COMPACT TV SYSTEM	£397.69
COMPACT ENTRY SYSTEM	£383.69
BBC B (2nd Hand)	P.O.A.

★ DISC DRIVES ★

Please phone for latest prices!

We also supply COMMODORE, ATARI, AMSTRAD, IBM, OLIVETTI, NEC and many other ranges of computer systems at very competitive prices.

★ Excellent range of software available ★

★ We have repair facilities for most machines ★

★ We supply WATFORD ELECTRONICS products! ★

★ We write customised software for business applications at the lowest possible rates ★

★ Accessories include: Winchester, Printer Buffers, Electronic Equipment, ★

Firmware, Satellite Systems and lots . . . lots more!

★ PRINTERS ★

LASER SPECIAL QMS K8	£1,985.00
MP201(P) DOT MATRIX	£389.00
MP200(P) DOT MATRIX	£328.00
MP165 DOT MATRIX	£228.00
CITIZEN 120D MATRIX	£138.26
PANASONIC KXP1080	£138.26
JUKI 5510	£229.00
DAISY WHEEL PRINTERS	P.O.A.

CANON PJ 1080A ONLY
COLOUR PRINTERS £260.83

AT LOW PRICES

This advert allows you to purchase any product with an additional 5% discount!!

Mail Orders welcome. Access/American Express

All prices exclude VAT & packaging.

Phone us on 01-568 7149 or drop in at

173 THORNBURY ROAD, OSTERLEY,
ISLEWORTH, MIDDLESEX TW7 4QG

(next door to Osterley Park)

Telex: 946240 CWEASY G

Ref: 19008215

LABELMASTER

THE COMPLETE LABEL-PRINTING PROGRAM

Produces attractive message labels using a variety of print styles - centralise each line if required. Creates mailing list databases for printing onto labels, in Pica, Emphasized or NLQ (NLQ printers only).

Accepts label sizes 89x36, 89x24, 70x36, 70x24.

All formatting is done for you - all you have to do is put the labels in the printer!

Requires 80-column screen. Suitable for use with any Epson-compatible dot-matrix printer £18

Multi-colour version - produces multi-colour message labels with an Epson-compatible colour printer £23

Available on 40- or 80-track disc for all models of BBC Micro (OS 1.2 onwards) - please state model when ordering

15k BUFFER KIT FOR JUKI 5510 £18

Fitted in minutes - full instructions provided

All prices include VAT and p&p



Calderdata

High Lee, Halifax, HX2 6LB.

Tel: 0422 885202



MEGA-ROM

67 Powerful commands on this 16K Rom.
A comprehensive BASIC toolkit, friendly and thorough Rom management, utilities for the disk user including format, verify, repair, editor & search routines.

"Overall a good selection of numerous utilities and a recommended buy at around £35" MICRO USER - JUNE 1986.

NOW ONLY £29.95

ROM MASTER

New improved version of our powerful Rom management system.

Now with even more commands to control your errant Roms. This Rom will keep others turned off even through CTRL BREAK. Over 20 commands including the ability to encrypt & de-encrypt files to keep them secure from prying eyes.

PRICE £14.95

■ VECTOR 1 ▽

TAPE TO DISK UTILITY FEATURES

- + Once only purchase
- + Can save to any disk
- + Very user friendly, help pages on disk
- + 40/80 Format
- + No awkward ROMs, can be used on any machine
- + Can load to all available RAM & 400-&7FFF
- = Simply the best tape to disk utility available

Vector 1 versions compatible with Acorn, Opus, UDM, Cumana, BBC+ & Watford (Not 1-42, 1-43 DFS's.)

■ VECTOR 2 ▽

DISK UTILITY FEATURES

- + 40/80 Format
- + User friendly, menu driven
- + Contains powerful features such as a disk sector editor, Disk Compare, format, verify and track repair
- = The most powerful disk utility available

NEW IMPROVED VERSION (1.40)

Send £2.00 with old disk for upgrade.

Prices: £12.00 each for Vector 1 or Vector 2 £23 for both.

PLEASE SPECIFY DFS

Scythe Toolkit £21.95 (Send for full details)

All prices shown include VAT and p&p. Please add £3.00 per disk if you require 3" disks and specify when ordering.

Orders to:

CHALICE SOFTWARE, Dept AU
3 Merlin Way, Covington,
Swindon SN3 5AN.
Telephone 0793 615026



VECTOR 1 & VECTOR 2
now compatible with
BBC+ and Master
series.

FREE ADS

Penfriend wanted to exchange info, send list of all software you have to exchange. Write Michael L'Abri, Nelson, St. Helier, Jersey.

Penpal BBC B wants to swap ideas and software. (Age: 13 years approx) Gerard McArearey, 60 Blackstone Crescent, Pollock, Glasgow G53 5DN.

Penpal wanted with BBC to exchange ideas especially on 6502 Second Processor, light pen. I Bruce, 114 Girvan Gdns, Dundee DD4 0NJ.

Penpal wanted, swap hints, tips, programs. Also seeking Solidisk sideways RAM, decent printer and monitor. Phone with prices. 01-968 3454.

Penpal wanted, Electron owner (under 14) and beginner. Contact Donna Whitefoot, 49 Cleddan, Treowen, Newtown, Powys SY16 1NB.

Printer Seikosha GP-25X, suit BBC with lead, £80. Toolkit ROM boxed and manual, £10. Phone: Cheltenham 574952.

Complete system for sale BBC B, Torch Z80 + disc, drives Juki 6100 printer, many extras, perfect condition, £850 ono. Evenings. Tel: Arundel (0903) 883231.

DBC drive teac 40track single sided, no PSU 100k, free games disc including lead and manual. Phone 01-733 2251, Ron.

Printer GP100A 80col dotmatrix, as new full supporting software, including wordprocessor and graphics dump, £80.00. 01-733 2251, Ron.

Disc interface for BBC B. DFS includes format/verify. 120 files, d/density, utils disc and manual. Offers around £35. 01-644 3848.

Wanted a pocket TV of any size. Will pay up to £40. Y.H. Bae, North House, Barnard Castle School, Co. Durham DL12 8UN.

Complete BBC B OS1.2 system, including: Basic 2, ROM board, ZIF socket, Plinth, AMX mouse & art, latest DFS and ADFS. Much software £620 ono. 01-349 4366.

BBC B + disc interface + Wordwise + printmaster + hard cover + 3 joysticks + 150 programs (cost £800), only £290. Also hi-res monitor + leads, £60 ono. Original Fleet St. Editor, £25 ono. Twin double-side 40/80t drives + power supply guaranteed. Only £150. Tahir, Blackburn (0254) 679350 (evenings).

Laserbug magazines wanted to complete project. Details please to 101 St Nicolas Park Drive, Nuneaton Warks CV11 6DZ.

Printer Quendata dot matrix; parallel pica elite enlarged condensed modes, 3 months old plus Dumpmaster ROM, £105. Reading (0734) 732512.

Slogger ROM box for sale to fit Electron-includes sideways RAM and many ROMs, Addcomm etc, £75. Tel: Mark, (0222) 830508.

Ultradrive Microcassette storage system, loads and saves 7 times quicker than cassette recorder. No extras required. £50 including 8 microcassettes. Tel: 0289 307534.

Acorn 6502 second processor complete with Hi-Basic and DNFS ROMs. Hardly used, £110 ono. Phone Colwyn Bay, North Wales 2971.

BBC B+, WS2000 modem, disc drive, joystick, phone, Acorn DFS, S/RAM, disc-box, many games, toolkit, DataBee, View ROMs + many images, £1000 worth of games, many mags + books, much educational software. £630. Leg Jones: Upminster 50404.

Wanted Acorn, Pace, Viglen, or Cumana DFS (8271 only), for £35. Write to: Y.H. Bae, Barnard Castle School, County Durham, DL12 8UN.

BBC dual drives 40 trk s/sided, cables, manuals + £100. Free software. Only £95 and as new! Tel 061-483 7228.

BBC B 6502, SP modem; Cumana CS100 disc drive, ATPL Sidewise lightpen, Replay mouse (AMX) Superart Comms ROM, Powerplax Revs, Yie-Ar-Kung-Fu + others, £720 ono. Will split: (0600) 860371 evenings.

BBC B + 128k, 40/80 drive, green screen, ADFS, View and much more, £500. Ring Stevenage (0438) 726430 evenings or weekends.

Cobra Mk.3 for sale. Half price or swap for Viper. Mark de Weger, Calsloan 8-33, 7522 MA, Enschede, Netherlands.

Wanted software publisher for my AMX House Mouse program Disc based, with four separate but linked programs. (0933) 55273 (Mark).

Wanted Acorn User 1-21, +31, Micro-User V1/1-V2/12, in VGC. S. Moorsee, 47, Woodland Road, Sawston, Cambs. CB2 4DT.

Wanted BBC B, Basic OS, 120 disc-drive, double sided 40/80 switchable. Telephone: (0225) 826826 XT 5161. Ask for Miklos, 9am till 5pm.

Disc drive, 40 track, 100k, with cables and lots of software, £40. Also Pet computer integral cassette 8k, £60. Richard: (0272) 839688.

BBC B OS 1.2 Basic II boxed, £160. Tel: Bristol (0454) 412551.

Swap professional daisywheel printer, Diablo 1650, + Twin-Bin sheet feeder, spare printwheels/ribbons for Epson FX80. Contact Yatton 833494.

Replay the ultimate tape to disc system for BBC with Acorn 8271 disc controller. Tel: Bradford 595288, Mr. R Ciastko-£15.

BBC B OS 1.2 DFS, Wordwise +, speech system, manuals, software, Cost £700. Accept £370 ono. Phone 051-546 8955. Ask for Joseph.

BBC B, Acorn DFS + 100k drive, Microletic colour monitor, modem + ROM, twin joysticks, plinth, SWR, 20 discs, software, books, magazines. All in excellent condition. Cost over £900. Accept £580. Telephone: (0985) 4605 after 6 or weekends.

Acorn Electron (not working), all leads and manuals, plus one expansion for whole or part sale-offers. Tel: 01-422 2059.

Acorn Electron, software, books, magazines, plus cassette recorder. Sell for £50. Recently purchased Master hence sale. Ring Blackburn (0254) 52782.

BBC B, 100k 40 track drive, 16k sideways RAM, cassette recorder, AMX Mouse, joysticks, printer, over 80 discs with about 200 games on. All books, leads, boxes etc, £395 ono. Ring (0775) 4980.

BBC B computer 1.205, DFS, SER 7 board, Basic II. As new, £275 ono. Phone: Canvey (Essex) (0268) 693770.

BBC B, DFS, dual 400k Teac Taxan KP810, WW+, "DDD", Mailist, 10 discs, box user manuals, £650 ono. Tel: (0203) 349314.

For Sale BBC B, ADFS/DFS, ROM board, 16k SWR, joystick, Acorn Speech, ROMs, and software, £400. Telephone: (0795) 876850 after 4pm.

Parallel Centronics 306 printer, 80 cols, 100 CPS, VDU. + stand. Buyer collects, £40. Tel: (544) 5074 (Oldbury).

Microvitic 653 Cub, Mannesmann MT80 Printer, Cumana, CD400s, Dual DD joysticks. Books, software, manuals, cables, £660. Phone Vince after 6pm. (04203) 89634.

16k sideways RAM modules with software (40/80) disc, state which, £25 incl. HSS, 31 Manor Road, West Ealing, London W13 0JA.

Opus 100k disc drive for sale with 2 year guarantee. Offers around £70. Tel: Harpreet on 01-997 5648.

BBC B Acorn DFS Viglen cartridge system, assorted software. dust cover, manuals, £230. Phone: (0572) 55520 after 4pm. All excellent condition.

For Sale Watford DFS upgrade kit complete with 8271 and associated chips, £35. Phone Jeff on (0903) 755800 (evenings).

BBC B, Acorn DFS, Solidisk 4 meg 32 board fitted, and Cumana CS 100 40T disc drive included, £350 ono. Tel: (0388) 762360.

Torch Z80 2nd processor for BBC B or Master. Includes perfect software/manuals, £175. 031-229 0335.

Solidisk Eprom programmer, eraser with timer, U27128 EPROMs, driving software ROM, disc with 15 ROM images. Instructions, only, £49. Phone: (0573) 24515 after 6.

Teac dual 40-track disc drives, recently Viglen serviced, £75. Watford 21F socket. Barely used. £10. 01-866 5143.

8271 EDC chip for sale, £30 ono. Martyn 4 Westcote Rise, Ruislip Middlesex HA4 7LP.

Electron Plus-3 + ADFS and of software on disc and tape, plus books and magazines. Will discuss price. (0751) 74915.

School network manager in New Zealand requires similar manager to exchange ideas, hints, school security. Dean Ashby, 190b, Fendalton Rd, Christchurch New Zealand.

Solidisk Fourmeg with 32k RAM board. Gives sideways and shadow RAM + 5 discs software. As new, £50. Dursley 844937.

Selling BBC B, (1.20s), 6502 (64k) second processor, disc drive (400k), ROM expansion board, software, books, worth £1400, bargain. £599. Tel: James (0474) 872875.

BBC B with cassette recorder and forty track disc drive, plus mixed software. Total cost £300. Ring after six: (0282) 842289.

Cumana 200k drives, twin 40T single sided, PSU + utilities disc, manual, £120. Phone: K Hine 01-672 7322 evenings.

BBC B, Acorn DFS 400k disc drive, monochrome monitor, 32k sideways RAM, modem. Tel: 01-543 6493 evenings or weekends. £550 ono.

Seikosha GP250X printer, mint condition, plus Watfords, Dumpout 2 ROM, £150 ono. Tel: (0235) 811229.

Juki 6100 daisy wheel printer, parallel plus serial, £160. Two Mitsubishi 400k 80T drives with PSU £150. Tel: (0252) 510582.

For Electron with plus 1; Cumana disc interface with tape to disc ROM, £50 ono. Tel: 031-664 3071.

8271 DNFS ICS 78 - 87 complete DFS for BBC B, £50. Or part exchange 6502 Second processor. Cardiff (0222) 811076.

32k shadow RAM board, ROM and manual (Watford), £40. Tel: (02403) 4206.

Acorn Electron, £65. Quickshot Joystick, £5. First Byte Interface, £15 and software galore! Offers and enquiries to: Elliott (0223) 358456.

Penman Plotter, utils disc, A3 platten, pens, manuals, etc. VGC, in original box. Post free, £180 ono. Tel: 051-653 6576.

Exmon 2 Sleuth toolkit 1770/8271 DFS (STL), plus books on graphics assembler programming etc. All £100. Will Split. Phone: (0943) 863188.

BBC B complete with Acorn data recorder, user guide, good software, books. In good condition, £250. Tel: 01-698 0882 (London).

Beebug's Toolkit, plus and Exmon II ROMs. With manuals. Little used, £25 and £18 inc postage. Luton (0582) 412368.

Wanted BBC disc owners to exchange ideas and software. Write to: Paul Sharrock, 11 Eskdale Road, Leyland, Preston PR5 2AT.

27256 EPROMs (32k) £4.50 each. Tel: (0473) 680051 (Steve).

RH Lightpen for sale, only £25 (£45 new). Best on Acorn User test. See The Light. Phone Avva -60755 now!!

Convert your colour TV to a switchable TV/RGB monitor. For details see: A Davies, 24 Ynyswen Road, Treorchy CF42 6EE.

Programmers! interested in writing marketable programs with other Beeb users across the country? Details from: Paul Phillips, 13 Mountain Rd, Conwy, Gwynedd.

FREE PERSONAL AD SERVICE

Fill in the form below to a maximum of 20 words (one in each box) and send it to Acorn User Free Ads, 141-143 Drury Lane, London WC2B 5TF. Please use capital letters, write clearly, and remember your name, address and telephone number. Without this full information, supplied on a separate sheet of paper, we regret we cannot carry your Free Ad. We cannot accept entries selling or swapping software. This is a service to readers - no companies please. One entry per form only. Free Ads are carried in the magazine as space permits, and any Free Ads not used within a month of receipt will be disposed of.

ACORN USER ADVERTISEMENT PAGES — DECEMBER 1986

A&N Electronics	214	Electro-Music Research	226	Nelpco	221
A.B. Computers	228	Electronequip	215	Nevis Record Ltd	190
Abbadish Comp Services	170	Event 1	226	Newsight	32
Acorn	12/13	Falconsoft	224	Nidd Valley Micro Products	IFC
ACP	6/98	Fernleaf	33	Number 1 Systems	215
Akhter Computer Group	8/28/29	Flora Electronics	230	Number 3 Software	226
All-Tec	70	FRC Electronics	219	Oak Universal	176
Allan Data	221	Galaset	54	Ocean Software	14
AMS	23/27/79	General Information Systems LT	149	Opus Supplies Ltd	166/180
Apex Software	219	Golem	200	Paean Systems	188
ATPL	152	GPD Systems	144	Paulfray Ltd	222
B & S Holdings	191	Grafsales	189	Peartree Computers	71-78
Banbury Business Computers	33	Griffin Computers	4/5/221	Peter Donn	70
BBD Computer Dust Covers	214	Ground Control	214	Pillerbox Software	220
Beebug	19/20/21	Hantarex UK Ltd	87	Pineapple Software	216
Brainsoft	221	HCR Electronics	194	PMS	52
Burocare	188	Hi Level Algorithms	82	Ptarmigan Software	202
C & F Associates	138	Hi-Technology Show	204	R&D Speech Technology	206
Calderdata	228	HSV Computers	178	RAMS Computers	210
Cambridge Micro Processor Serv	220	Incentive Software	31/165	Reflex Magnetics	103
Cardigan Electronics	216	Innovative Software	222	Rickitt Educ Media	208
Care Electronics	223	Interface Electronics	228	S.L. Peripherals	218
Carey Electronics	205	Kirk Automation Ltd	48	Sabre Software	219
Carwell Computers	33	KM Software	221	Sea Information Systems	168
CED	142	LCL	200	Selec Software	138
Ceedsoft	230	Leewood Developments	221	Silicon City	138
Centec	21	Logo Software	56	Soft-Teach Educational	208
Ceratech Electronics	222	Logotron	202	Softlife	216
Chalice Software	228	LVP [Costal Tapes]	224	Solidisk	182-187
Chromagraphics	206	M & M Trading Ltd	217	SP Electronics	230
CJE Microcomputers	164	Macsen Software	10	Squirrelsoft	188
Clares Micro Supplies	154	Mancomp	225	Star Micronics	140/141
Clwyd Technics	192	Matmos	168	Store Stock Systems	104/202
Communitel	208	MB Software	220	Superior Software	IBC/BC/132
Compshop	148	Meadow Computers	170	System	100/165
Compumart	32	Medstat	208	Technomatic	34-42
Computaccount	96	Mertec	174	Terrel Electronics	226
Computer Concepts	106,107	Micro-Media	1	Tiger Software	226
Context Computing	170	Micro-Musical	214	Torch Computers	172
Croydon Computer Centre	221	Micro-Robotics Ltd	168	Twilstar Computers	24/25/26
Cygnat	224	Microaid	215	Unisoft	198
Database Publications	16	Microfix	210	University Of Reading	220
Datapen Microtechnology	168	Microman Computers	160	Viglen Computer Supplies	30,31,33,156-9
Dataphone	70	Micronet	167	Vinderen	214
Datastore	222	Micropower	93/94	Vine Micros	56
Deltronics	206	Microservice	70	Voltmace	162
Design Dynamics	210	Midwich Thame	198/224	Watford Electronics	58-69
Design People Software	136	Mighty Micro	226	We-Serve	190
Design Systems Software	219	Mijas Software	200	Wee-Beastie	170
Digital Services Ltd	208	Milis Associates	80	Westlink Promotions	219
Direct Disc Supplies	136	Minerva Systems	191	Willowsoftware	228
Edusoft	208	Minic Business Services	210	WL Computer Services	32
		Morley Electronics	212	Wordstream Ltd	168

ALL IN STOCK

S. P. ELECTRONICS

BBC MASTER 128 £499.00

BBC Bs £299

BBC Bs with disc interface £350

CUMANA CD800S (800k) 2x80 track DS drive with PSU £339

CUMANA CDX800S (800k) 2x80 track DS drive without PSU £299

CPA 80 Printer (inc. cable) £199.00

Disc Operating System £96.00

Disc Drives from £85.00

G3 WHO RTTY PROGRAM (TAPE) £7.50

G3 WHO RTTY PROGRAM (EPROM VERSION) £20.00

Circuit board for RTTY decoder Mk3 (inc. instructions) £10.00

CANNON Dot Matrix 160cps NLO £299.00

Joysticks (pair) self centring + analogue from £17.95

Printer Cable (Centronics) £12.90

Disc Doctor £33.00

WORDWISE Word Processor £33.00

Slow Scan TV Circuit Board + Program (inc instructions) £17.50

ADFS £29.90

1770 DFS Kit £49.90

OPUS 800k drives 40/80 £199

MASTER COMPACT from £458

Wide selection of software, books, leads, plugs, etc. All prices only SAE for full list. All available Mail Order while stocks last.

48 Linby Road, Huncknall,
Notts. NG15 7TS
Tel: 0602 640377 (all prices include VAT)

SPECIALISTS

Educational & institutional orders welcome

Carriage extra

HELP FOR VIEW USERS

HELP SCREENS FOR ACORNSOFT VIEW is a utility to help you, the user, obtain the benefits of the excellent VIEW wordprocessor. The commands and printer highlights are displayed on the command screen by pressing a function key. An example document is included for you to examine and print.

No more worries about line feeds or pound signs! Printer drivers are included for Epson compatible matrix printers: NLQ matrix drivers for Canon PW, Epson LX and Juki 5500, Star SG, Citizen C120D, and MP165. A special driver allows the Canon PW to switch between NLQ fonts. Daisy wheel printers supported are Quendata, Brother (with red ribbon switching) and Triumph Adler. These printer drivers allow (provided the printer does) Bold, Underline, Sub/Superscript, Enlarged/Shadow, Italic, and NLQ.

Experienced users have found that HELP SCREENS has added to their knowledge and novices have quickly become proficient users of VIEW.

Supplied on 40/80 track disc and tested with View 1.2, 2.1 and 3 for BBC B, B+ and MASTER. Price £10.50 including P&P. (Cheque/P.O. No cash please.)

Now available help screens for Viewsheets. Call for details.

CEEDSOFT

58 SAVILLE ROAD, BLABY, LEICESTER LE8 3HQ.
Technical Enquiries 0533 773405 between 5.30 and 7.30 weekday evenings. A267

DISCS	PRICES PER BOX OF 10 DISKS ALL DISKS FULLY GUARANTEED			
	40 TRACK		80 TRACK	
	SS/DD	DS/DD	SS/DD	DS/DD
5.25" Diskettes				
STORAGE MASTER	11.00	13.00	15.00	17.50
NASHUA				
(Lib. Cased)	12.00	15.00	16.00	18.50
MAXELL	14.00	16.00	16.00	21.00
UNBRANDED	7.00	8.00	9.00	9.00
BULK PACK (25 Discs)	16.00	19.00	—	20.00
3.5" Diskettes, Storage Master, Nashua, Sony (Box of 10)				
SS/DD	£23.50	DS/DD	£32.50	

40/80T SWITCHABLE DISC DRIVES

	with PSU	without PSU
Cased single	£140.00	£130.00
Cased double	£240.00	£225.00
5 1/4" Discdrive Maintenance Kit		£21.00

MEMORIES		(BBC COMPATIBLE)	
2764-25Ons	£2.25	4164-15	£1.00
27128-25Ons	£2.80	41256-15	£2.50
27256-20Ons	£5.00	41464-15	£5.00
27C265-25Ons	£6.50	41416-15	£2.50
		65C02Cmos	
6264LP-15	£2.75	CPU 2MHZ	£9.00
8271 FDC	£37.50	CPU 4MHZ	£18.00
8271 + TTL & CMOS CHIPS (Exc. DFSROM)			£42.50

LISTING PAPER

11" x 9.5" Microperforated 60gsm 2000 sheet £11.00 (+£3 P.&P.)

FLORA ELECTRONICS
 14 LEVER STREET, PICCADILLY,
 MANCHESTER M1 1LN
 TEL: 061 228 3553

CALLERS WELCOME
 Educational & Institutional orders welcome
 Prices include V.A.T. and P. & P.

SMALL ADS

● **GAC sers!** And other adventure writers. Adventure Contact provides advice on plotting, writing, marketing, free evaluation, interaction with other users. Sample magazine, £1; Pat Winstanley, 13 Hollington Way, Wigan, WN3 6LS.

● **Convert** 80 track drive to 40/80 switchable. MkII unit (cased) simply plugs in, £19. MkI kit, as above but requires soldering iron, fits inside drive, £11. Sideways RAM system 16k with software, £25. Computer repairs. Dept A10, Magus Electronics, 33 Pool Lane, Winterley Sandbach, Cheshire CW11 0RZ. Tel: (0270) 582748.

● **RAMfile.** The simple, fast database. Continuously variable field and record lengths. Fast - 14k files in memory. Simple-flexible searching, amending and printing. Appends and spools textfiles for wordprocessing. *Wordwise Plus* utilities included. 40 or 80 tr disc £15. Also £15 ROMfile (RFS) for Basic 1 and cassette. Mr McDonald, 19 Loskin Drive, Glasgow G22.

● **Problems? R-SOFT utilities! 1. How-To:** An essential collection of software and instructions for frustrated new disc owners who want to move their programs to disc. 3. **Rompull and Tapedump.** 4. **Automatic Disc Menu:** Includes sideways RAM version, can boot from ROM, works with 2nd 6502. 6. **SWROM*:** puts your Basic/machine code programs in ROM format. **RFS-Generator:** Generates ROM for the *ROM filing system. This does not use DFS workspace and is an ideal tool to run nasty programs from disc. All above packages £5 each. 13. **D-Master-V2:** Superb disc backup program; needs 8271 and sideways RAM; £8; on 16k EPROM: £12. Upgrade for D-Master owners: £5/£9 16. **Opus SD/DD/Challenger:** *Disc Menu, Disc Editor, Disc Indexer*, etc. Please enquire for further details. 17. **D-Editor:** based on D-Master-V2: will edit any disc D-Master-V2 can backup! £8/£12. Please send SAE for full list. R-Soft, 22, Marriotts Close, Felmersham, Bedford, MK43 7HD. Tel: (0234) 781730.

● **Upgraded to disc?** Problems transferring your tape software to disc? I'll transfer it for you. Also disc back-ups. Cost third original price. Disc is included. Never failed yet! Cheque with software on the original media, state BBC type, DFS type, 40 or 80 track. To BWS, 25 Vauxhall Rd, Newcastle NE6 4YH.

● **Electron Fun With Tables** helps your child learn tables. Home or school, £4.90 inc. RCJ (Educational), The Willows, New Buildings, Pleasdown St John, Bath BA2 8LB.

● **DBASE II**, fully installed for Acorn Z80 second processor, complete with original manual and master disc, £225. Acorn Z802nd processors

(2) with all manuals and various additional software, £225 each. *Datagem*, brand new and unused (2), £45 each or exchange. Modem (2) dual double sided 40/80 tr switching disc drives with internal power supply, £175 each. Tel: (0604) 68457 evening and weekends.

● **Do you own a home micro?** Do you want something more than the usual boring game? This is most certainly for you. Don't just play at life, become part of it by starting your own home based business. Full or part-time. You can make a lot of money very quickly. For Free details SAE to: Mr G McGovern (AU1); 97, Pilton Place, King and Queen Street, Walworth, London SE17 1DR.

● **Connectors:** Low price - high quality. Special offer: BBC printer lead £6.25 inc. Send for list: Alpha Communications, 26b Victoria Road, Emsworth, PO10 7NH. Tel: (0243) 375931.

● **Disc Drive 40/80 tr D/S, D/D half-height.** New guaranteed, uncased, £75. Cased, cabled and PSU, £95. Tel: (06845) 4693 daytime, (06845) 66488 evenings. Gary.

● **BBC Issue3 Basic2 OS 1.2** and disc interface. Recently serviced by Acorn Dealer. With *Elite* on disc (complete), £200 ono. 80 blank discs, £75. Tel: (0444) 45286.

● **Sail Plane!** Not just another cockpit simulation turkey. Multi-screen epic with 3D glider. Launch, climb, dive, thermalling turns, etc. Stall, spin and recovery all properly implemented. Can you negotiate the many hazards and fly to Lasham (watch our for the thunderstorm). Realistic and extensive. Cassette or disc - specify, £8.90. **Disc Manager.** Locate the program you want fast!! Save your disc catalogues to a database. Powerful machine code search routine. Find file by name. Find catalogue by number. Step-through, note pad etc. 40 or 80 tr BBC B - specify, £11.50 inc. Pavilion Software, 13, Aberdeen Rd, Brighton, Sussex BN2 3JA.

● **BBC B equipment** wanted and for sale. Examples twin 40 tr drives, £95. Colour monitors, £160. Printers, £150. Much more in stock. Tel:

(049161) 2349, 5pm-7pm.

● **Electron, Plus 1, Plus 3,** data recorder, *View, ViewSheet*, manuals, books, discs, tapes, £295. Lawrie, Barn Cottage, Wallington, Baldock, Herts SG7 6SW. Tel: (076388) 209.

● **Crossword Toolkit** suite, assists solving and setting of most grammar/grid type puzzles. BBC B/ Electron cassette, £5.95. M L Phillips, 12, Reydon Avenue, Wanstead, London E11 2JD.

● **Sideways RAM**, high quality moulded units (unlike others), proved in education, no soldering, read/write protect switch, includes comprehensive SWR utility software, plus twenty invaluable utilities/programs free. 16k - £13, 32k - £24. User-port/printer/RS423 selector switches, 2-up-to-9-way, from £15. Send cheques/ enquiries to: A&G Electronics, 14, Hurstwood Av, Bexley, Kent DA5 3PH. BT-Gold 72:MAG 90461, Prestel 322522315.

● **Electron & Plus-1,** Cumana disc interface disc drive 40tr/SS/PSU. *View ROM* cartridge. *T2CU ROM*. Boxed as new. Many games. If interested write to: TJ Newman, 49 Blithemeadow Drive, Sprowston, Norwich, Norfolk NR7 8PY.

● **Free Disc!** When you request our amazing disc prices. *Nebulae*, Dept (MH), Freepost, Carrickfergus, Co. Antrim, BT38 7BR.

● **BBC B+64.** Acorn 40tr disc drive. *Wordwise*, Acorn ADFS, *Vine Replay*, *Viglen Cartridge System*. All nearly new, £525 ono. Tel: Ray 01-749 6877 anytime.

● **BBC B OS1.2,** tape recorder, joystick, *View ROM*, software, books, magazines, £260. Tel: 01-390 3859 evenings and weekends.

● **BBC B + Torch** second processor, twin 400k disc, joysticks, RAM/ROM & sideways boards, *Music 500*, 40 books, 100 magazines, some software, £399. Tel: 01-542 2747.

● **Computerised iron-on** transfer badge and keyring of your favourite person, only £3.00. Send cheque and clear photo to P Perry, 66 Hexthorpe Road, Hexthorpe, Doncaster, South Yorks.

● **Get Into Robotics!** for only

We must remind advertisers that we cannot carry advertisements which incite readers to break the protection and therefore copyright of commercial software

£18.95. My interfaces control two motors, lights, electromagnets. Comprehensive software on disc/tape, instruction. A Thomson, 1 Arlington Road, Richmond TW10 7B2. Tel: 01-948 1681, 4pm - 9pm.

● **16k SWR** with R/W switch. No soldering required. Software and instructions supplied. Cheques and POs to: M Coles, 1, Melbourne Avenue, Newtown, Birmingham, B19 2HY.

● **Tournament Manager.** Full electronic scoreboard, results service. 128 players/ teams! Status autosaved. Certificates, fully customisable. BBC B 40 tr, £9.75. AB1CO (A1), Willow House, Shepreth, Royston, Herts.

● **Z80 second processor.** Runs CP/M, Basic, Cobol 64k RAM. Increases x3 BBC speed. *Memoplan, Fileplan, Graphplan, Accountant, Stock Control*, & manuals + others - £150. Bargain! Pace 400k d-sided 80/40 tr disc drive, manual, formatting disc, £90. Blank 5.25in DS/DD 96 TPI discs £1.50 each. Offers. Tel: Little Haywood, 881468 or Rugeley 5792.

● **Exciting educational package** - encourage children to enjoy mental arithmetic. The package includes high quality graphics and sound and has been developed following their guidelines of professional educators. To obtain your copy please send a cheque payable to M J Curry, 37 Alexandra Terrace, Brynmill, Swansea SA2 0DX.

● **SHOWJUMPER** (BHS compatible game) £5.50 £7.00 disc. BBC. Also 35 plus professional educational programs. Bryants 5, Renfrew Green, Blakelaw, Newcastle-upon-Tyne NE5 3TY. Tel: 091 286 6146.

● **BINARY arithmetic** explained. Understand base conversation, twos compliment, addition, subtraction, multiplication and division £7.95 cassette/disc (40/80). Bedford Graphix, 29 Burstock Rd, London SW15. Tel: 01-788 8681.

Please include your cheque for £11.50 (inc. VAT) made payable to Redwood Publishing (please note: no POs; cheques only). This is the standard fee. Don't forget your name, address and phone number. Send cheque plus form to Acorn User Small Ads, 141-143 Drury Lane, London WC2B 5TF. Please print clearly.

ACORN USER'S

D I A R Y

Yearly bore

As usual, the Christmas Diary sees the announcement of the Bore of the Year.

This year we are proud to award the dubious honour to Laurie Candlewick who runs the Econet bulletin board.


Laurie, always front runner, made sure of the title at a recent computer show where 50 members of the audience walked out within a record breaking 10 minutes of his start. Laurie's technique was to rabbit on about X21 and X25 protocols to an audience of mums, dads and kids out to try and enjoy themselves.

Winner of Wit of the Year for a second time is Andrew Gordon of SJ Research who knocked spots off the others.

Not Elite

Spare a thought for our reader. He phoned us up to tell us he'd brought *Elite* last month and had been playing it almost non-stop. He managed to land on some planet but hasn't been able to get off yet! (How do you land on a planet?)

THE MAN FROM



The whole *Acorn User* office had a freebie to Holland recently. Off to a big meet of the Big Ben Club at Hedel. Quite why they should attend a thrash organised by the rhythm-crazed fans of the Big

New micro scoop

The Abuser Diary once again scoops the world to bring you details of a new Master series micro. Our interfering reporter Orson Fact – who was first to tell you about the Master and the Compact computers in these columns, can reveal the existence of the 128 Master.

It looks just like a Master 128 but in a revolutionary move the keypad has been re-positioned on the left of the keyboard.

Ghostware bundled with the new micro is Acornsoft's *Over-View* and Second Processor *Elite*. The micro will not allow pipelining. Acorn has refused to admit anything, including the existence of the new micro.

A spokesperson said it could have been a wrongly mounted slide but didn't wish to commit him or her self, and couldn't risk talking about any new BBC computers. Orson is waiting.

Network capers

The recent Econet conference produced a few chuckles. One great topic of conversation was the lack of local buffering by the NFS. To quote Kim Spence Jones, 'If your program's professionally written it should do it automatically'. Perhaps someone should inform the authors of Basic and *ViewStore*!

High or low of the day was the lecture given by Andy Finney of the BBC about the Domesday project – very important at an Econet conference, we don't

think. He put the demo tape through its paces and showed us what fun it is. Of course we were all astounded to learn that there were three Welsh speaking chaps living in the vicinity of Edinburgh – a really useful application that.

Andy couldn't bring the Domesday system with him but he did commit himself by saying it would cost more than a BBC micro. However, we can reveal to Andy that the cost of the system will be £3,800.


Ben Banjo Club escapes me, but I suppose the fact that it was free played some part.

I refused to attend on several grounds. First, I think the banjo leaves a lot to be desired – very plunky-punk. Second, I have had more than one encounter with the lethal brew known as Old Genever, one of which left one leg shorter than the other. However, the most telling argument (or argument as they spell it in computer manuals) was my intimate knowledge of the

likely behaviour of the rest of the party.

The thought of Tony Quinn and Bruce Smith festooned with six-packs of Carlsberg Special and the colours of Liverpool and Arsenal, racing around the ferry taunting old ladies was too much.

The reputation of Britain has been sullied enough. Why Tony persists with this unruly behaviour is a mystery. It's only plastic surgery that's prevented his extradition to Belgium as it is. I think a veil

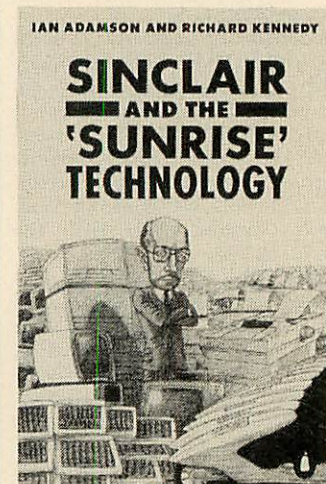

Guess what happened to our favourite uncle at Christmas over the past 10 years? Well, here it all is:

1985: TDP Ltd liquidated, debts £6.4m. 1984: £4m ad campaign. 1983: £50,000 ad campaign for flat TV. Smiths order 7000 – 300 delivered. 1982: New flat screen TV. 1981: Faulty ROMs in ZX81. 1980: ROM for ZX80 withdrawn. 1979: £7.8m losses. 1978: £1.98m losses. 1977: £1.29m losses. 1976: Nothing! 1975: Black watch.

All magic stuff from *Sinclair and the Sunrise Technology* by Ian Adamson and Richard Kennedy (Penguin), a must!

should be drawn over that. Sub judice, you understand.

Anyway, enough of the headbanging, let's talk little computers. The new Compact is coming in for stick for not being very compact. Wires all over the place: RGB cable, disc drive ribbon, five volt lead – all sticking out of the back of what is supposed to be a detached keyboard. Try dropping that lot in your lap and sitting in front of the telly. More to the point, try standing up again.





The Eerie Loading Screen



The Elf escapes from a Ravenbee



Close-up of a Crystal Ball



The Adventurer collects a Treasure Chest

Ravenskull Castle — The Fortress of Doom

Your task is to save the village of Austburg from imminent devastation. You must enter Ravenskull Castle and retrieve the silver crucifix which the evil Baron Strieg has stolen. Only then will Austburg be safe from the Zombies who inhabit the swamp surrounding the medieval castle.

Ravenskull is a massive arcade-adventure featuring smooth 4-way screen scrolling over the 4 levels of play. Each level is 64 times the size of the screen, and there is an initially-bewildering variety of game characters including: acid pools, man-eating plants, time-doors, keys, pick-axes, scythes, spades, bows and arrows, dynamite, bells, food and wine (beware! it may be poisonous or have strange side-effects). There are also several magical scrolls and potions to be found. These may be good or evil; for example the strength scroll gives you the power to push wooden casks, whereas the lightning-strike scroll is fatal if used.

The guardians of the castle, the vicious Ravenbees have to be avoided or, in some cases, destroyed — but there is only one way to kill them; you must discover how as you venture through the dank passages of the castle. Your quest is not an easy one — only with time, experience and a little luck will you unravel all the mysteries within Ravenskull Castle.

PRIZE COMPETITION

If you are skilful enough to complete Ravenskull, you can enter our prize competition. The prizes include a £100 first-prize, with Superior Software T-shirts for runners-up.

PRICES

Electron cassette.....£9.95 BBC Micro disc (5¼").....£11.95
BBC Micro cassette.....£9.95

Ravenskull is compatible with the BBC B, B+, Master

**SUPERIOR
SOFTWARE**
Limited

ACORNSOFT

The screen pictures above show the BBC Micro version of Ravenskull.



OUR GUARANTEE
• All mail orders are despatched within 24 hours by first-class post.
• Postage and packing is free.
• Faulty cassettes and discs will be replaced immediately.

24 HOUR TELEPHONE
ANSWERING SERVICE FOR ORDERS


Dept. RS3, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453.

For the COMMODORE, AMSTRAD, BBC MICRO, ELECTRON


REPTON

THE ULTIMATE CHALLENGE

3



The Screen Editor.



The Character Editor.



Being pursued by a Monster



The Time Bomb is located



The Poisonous Fungus grows insidiously



Collecting a Golden Crown

Are you ready for the ultimate challenge?

Our original Repton game was immediately acclaimed as a refreshingly new concept: a game requiring dexterity to complete its arcade-style elements, and clear logical thinking to solve its strategic puzzles. Repton involves retrieving treasure from cleverly-constructed traps of falling rocks whilst avoiding the fearsome monsters and haunting spirits. "This is an astounding game reaching new heights in BBC arcade adventures," enthused the Micro User magazine.

Last Christmas saw the release of Repton 2, larger and much more challenging than before. Acorn User's Technical Editor Bruce Smith wrote: "Repton 2 is better than anything I've played on the BBC Micro or Electron. Brilliant!"

Now, completely rewritten and improved for the Commodore, Amstrad, BBC Micro and Electron, we proudly present Repton 3. For the first time, a screen-designer is included: try to devise screens that will perplex your friends, then see if you can solve their newly-designed screens. Another innovation is the character-designer which enables you to design your own monsters, rocks, eggs, spirits, diamonds... any or all of the game's characters can be redefined as you wish.

Repton 3 is much larger than its predecessors — it has 24 fascinating screens, and players who are skilful enough to complete them all can enter our prize competition described below. All the favourite Repton characters have been retained, together with several new features: a creeping poisonous fungus which grows at an alarming rate; time bombs and time capsules (for puzzles in the 4th dimension); and golden crowns as well-deserved rewards for your endeavours. **Can YOU complete Repton 3?**

PRIZE COMPETITION

If you complete Repton 3, you can enter our competition. Prizes include over £200 in cash, with T-shirts, mugs, badges and pens for runners-up.

COMMODORE 64/128 • AMSTRAD CPC 464/664/6128
BBC MICROS: B, B+, MASTER, MASTER COMPACT • ELECTRON

Commodore Cassette.....	£9.95	BBC Micro Cassette.....	£9.95
Commodore Disc.....	£11.95	BBC Micro Disc.....	£11.95
Amstrad Cassette.....	£9.95	Master Compact Disc.....	£14.95
Amstrad Disc.....	£14.95	Electron Cassette.....	£9.95

SUPERIOR
SOFTWARE
Limited

ACORNSOFT

Dept. R4, Regent House, Skinner Lane, Leeds LS7 1AX.

The screen pictures above show the BBC Micro version of Repton 3.

Telephone: 0532 459453.



24 HOUR TELEPHONE
ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.